
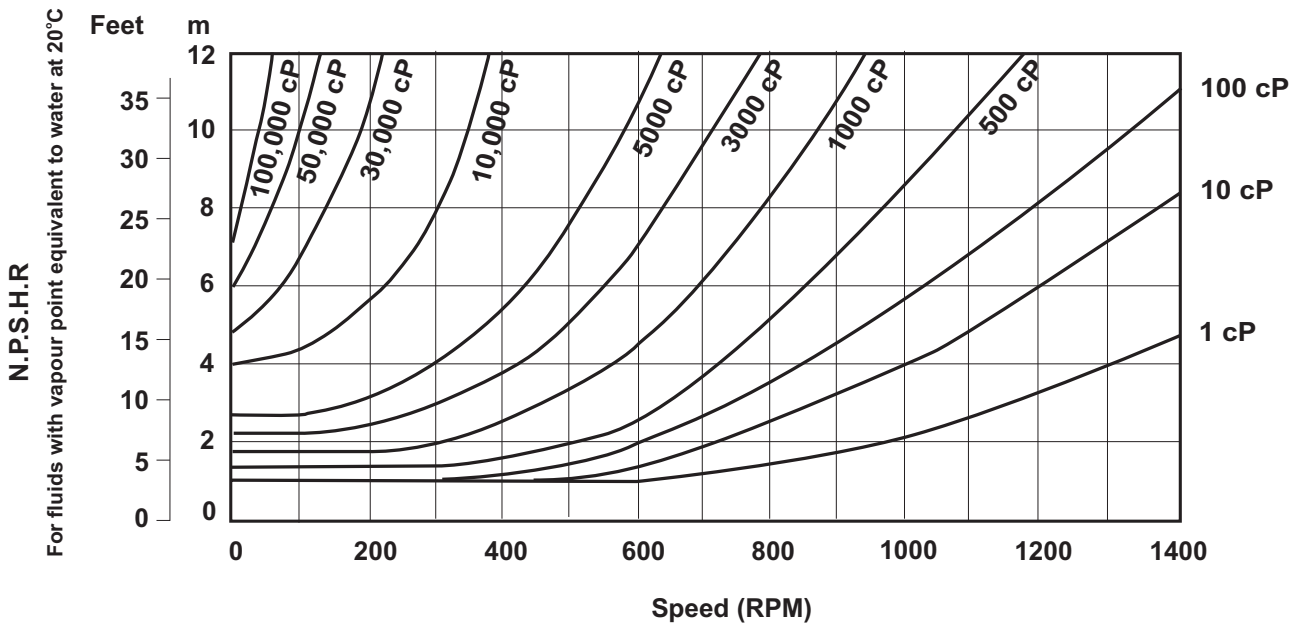


# Power and N.P.S.H.R graph

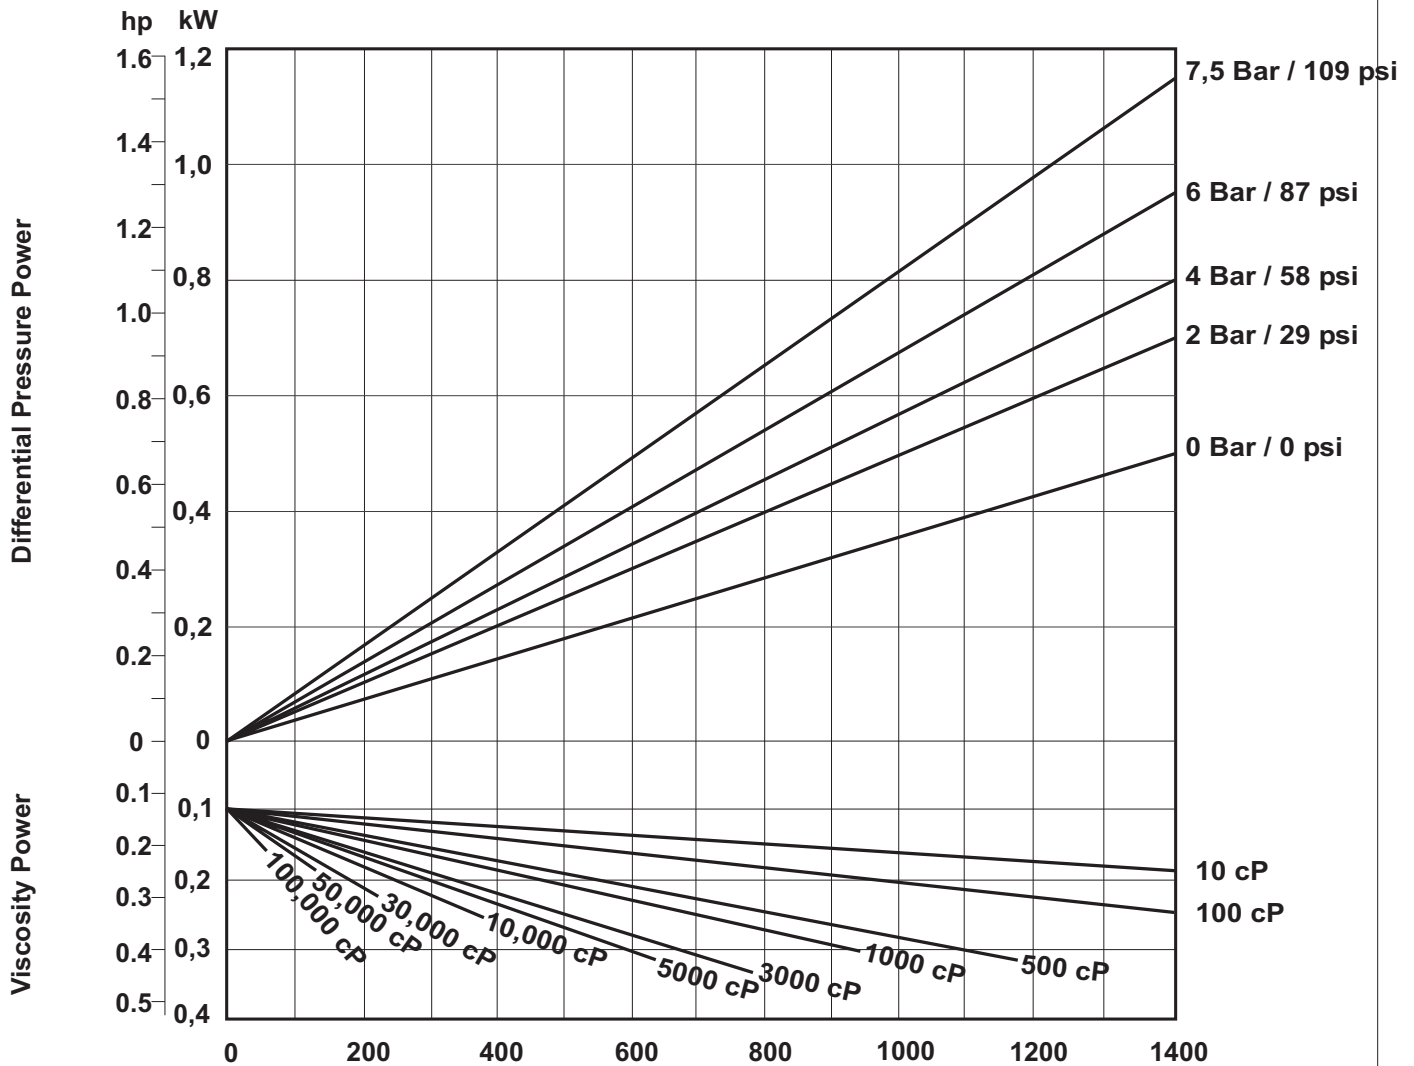


NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.


Max. shaft input torque - 35 Nm / 310 inlb

DW1/003/7.5



# Performance graph High Efficiency

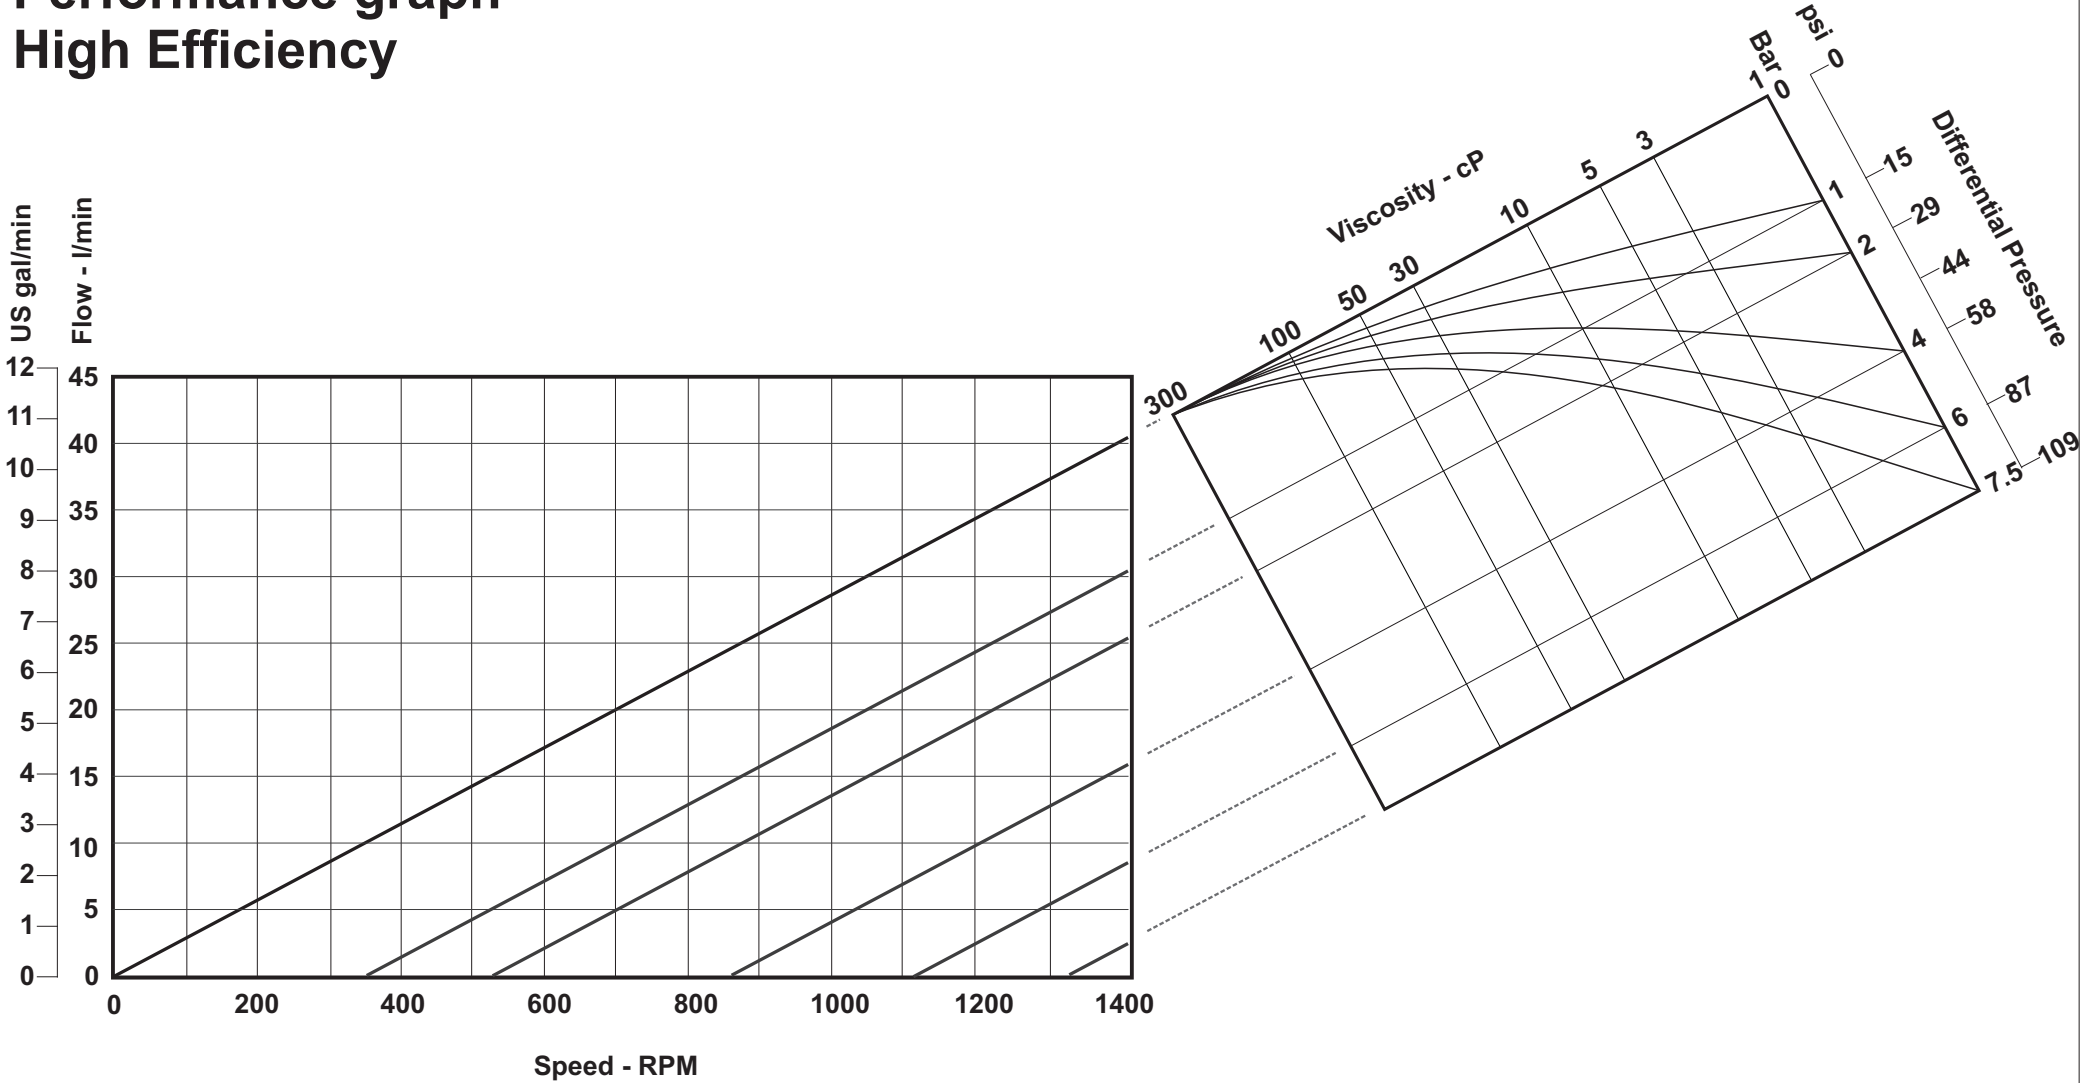

# Performance graph Multi-Duty

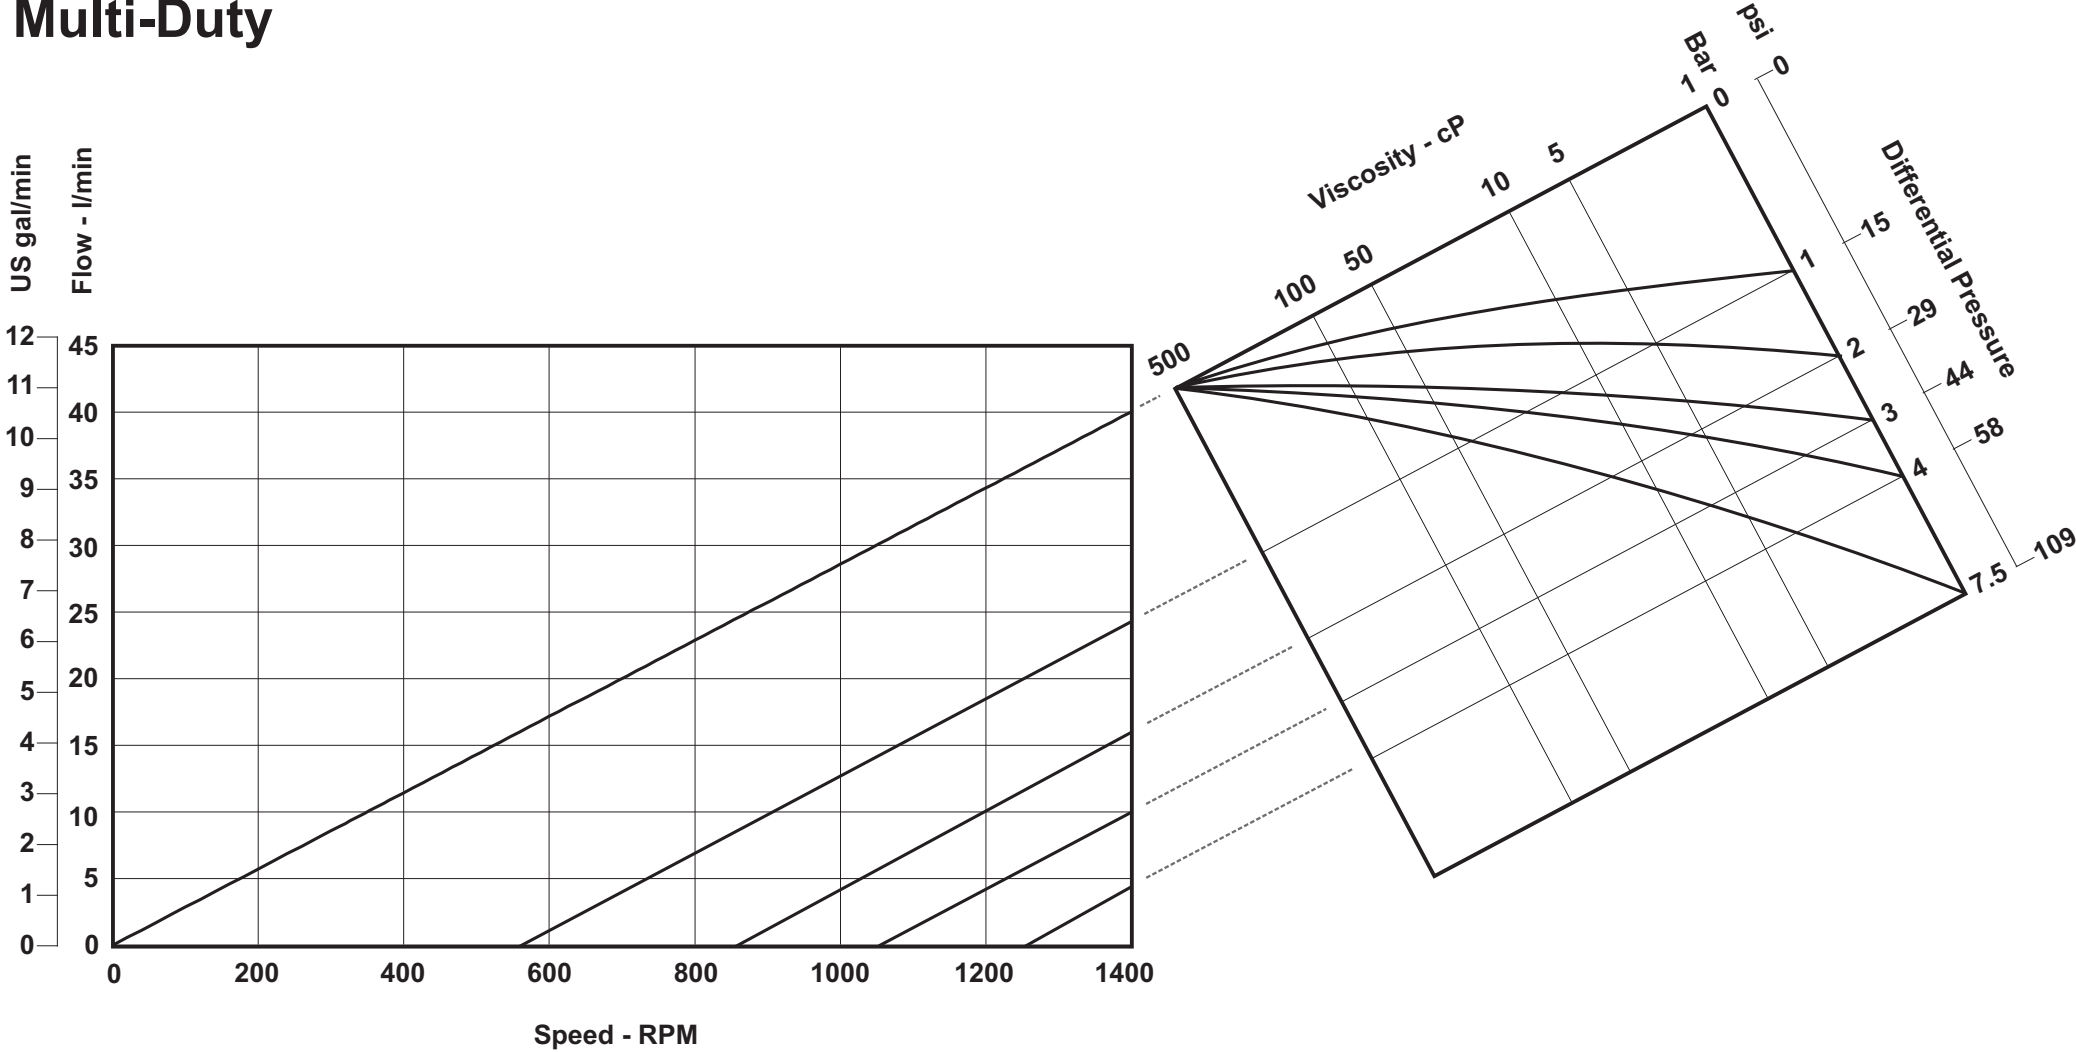


# Power and N.P.S.H.R graph

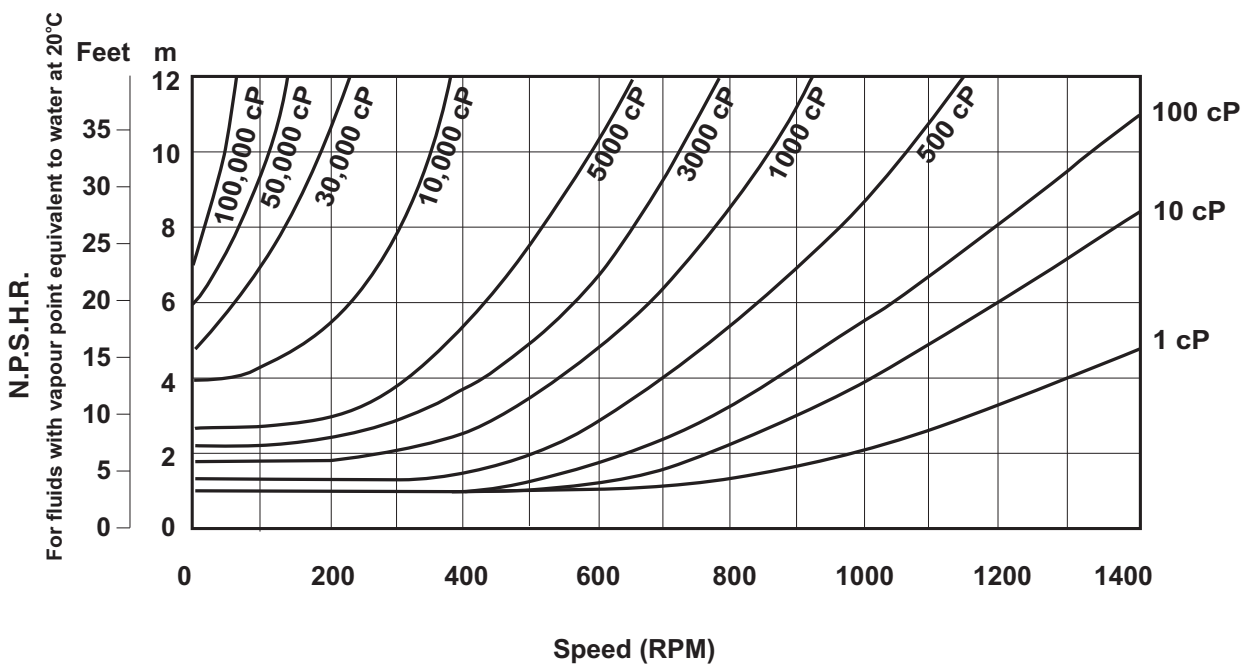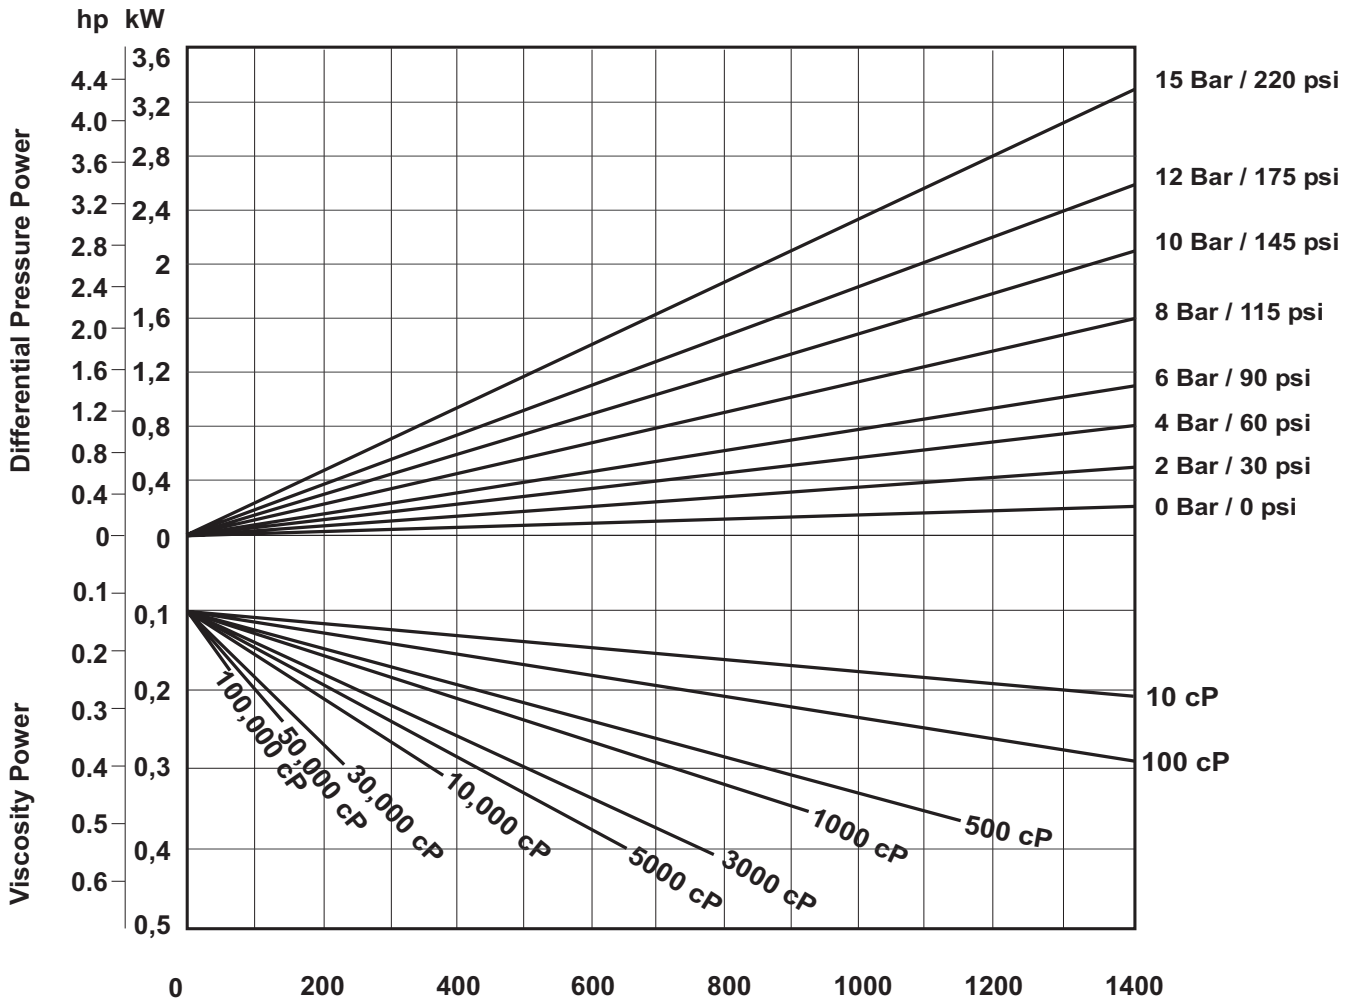


NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.

Max. shaft input torque - 35 Nm/ 310 inlb


# Performance graph High Efficiency

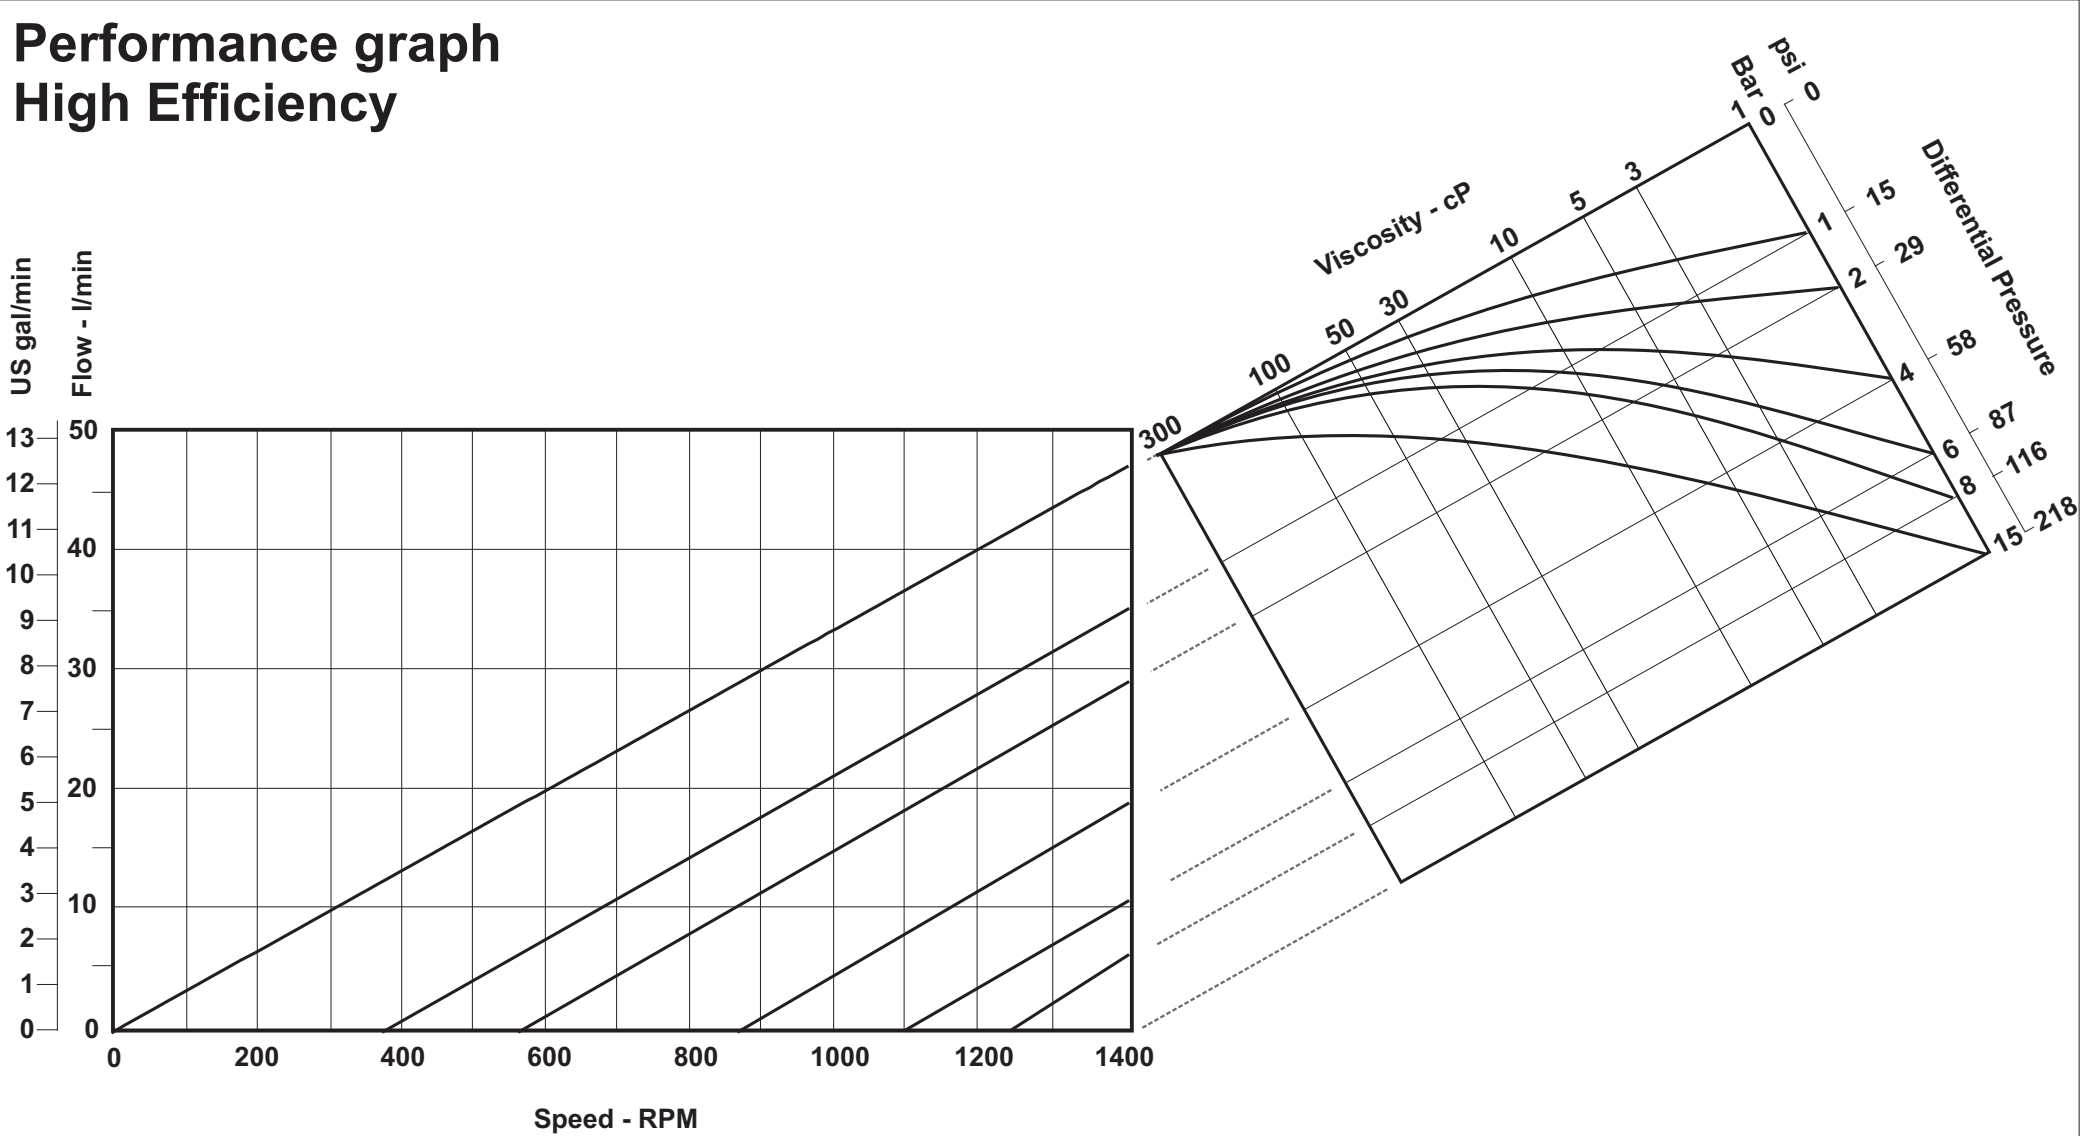



# Performance graph Multi-Duty

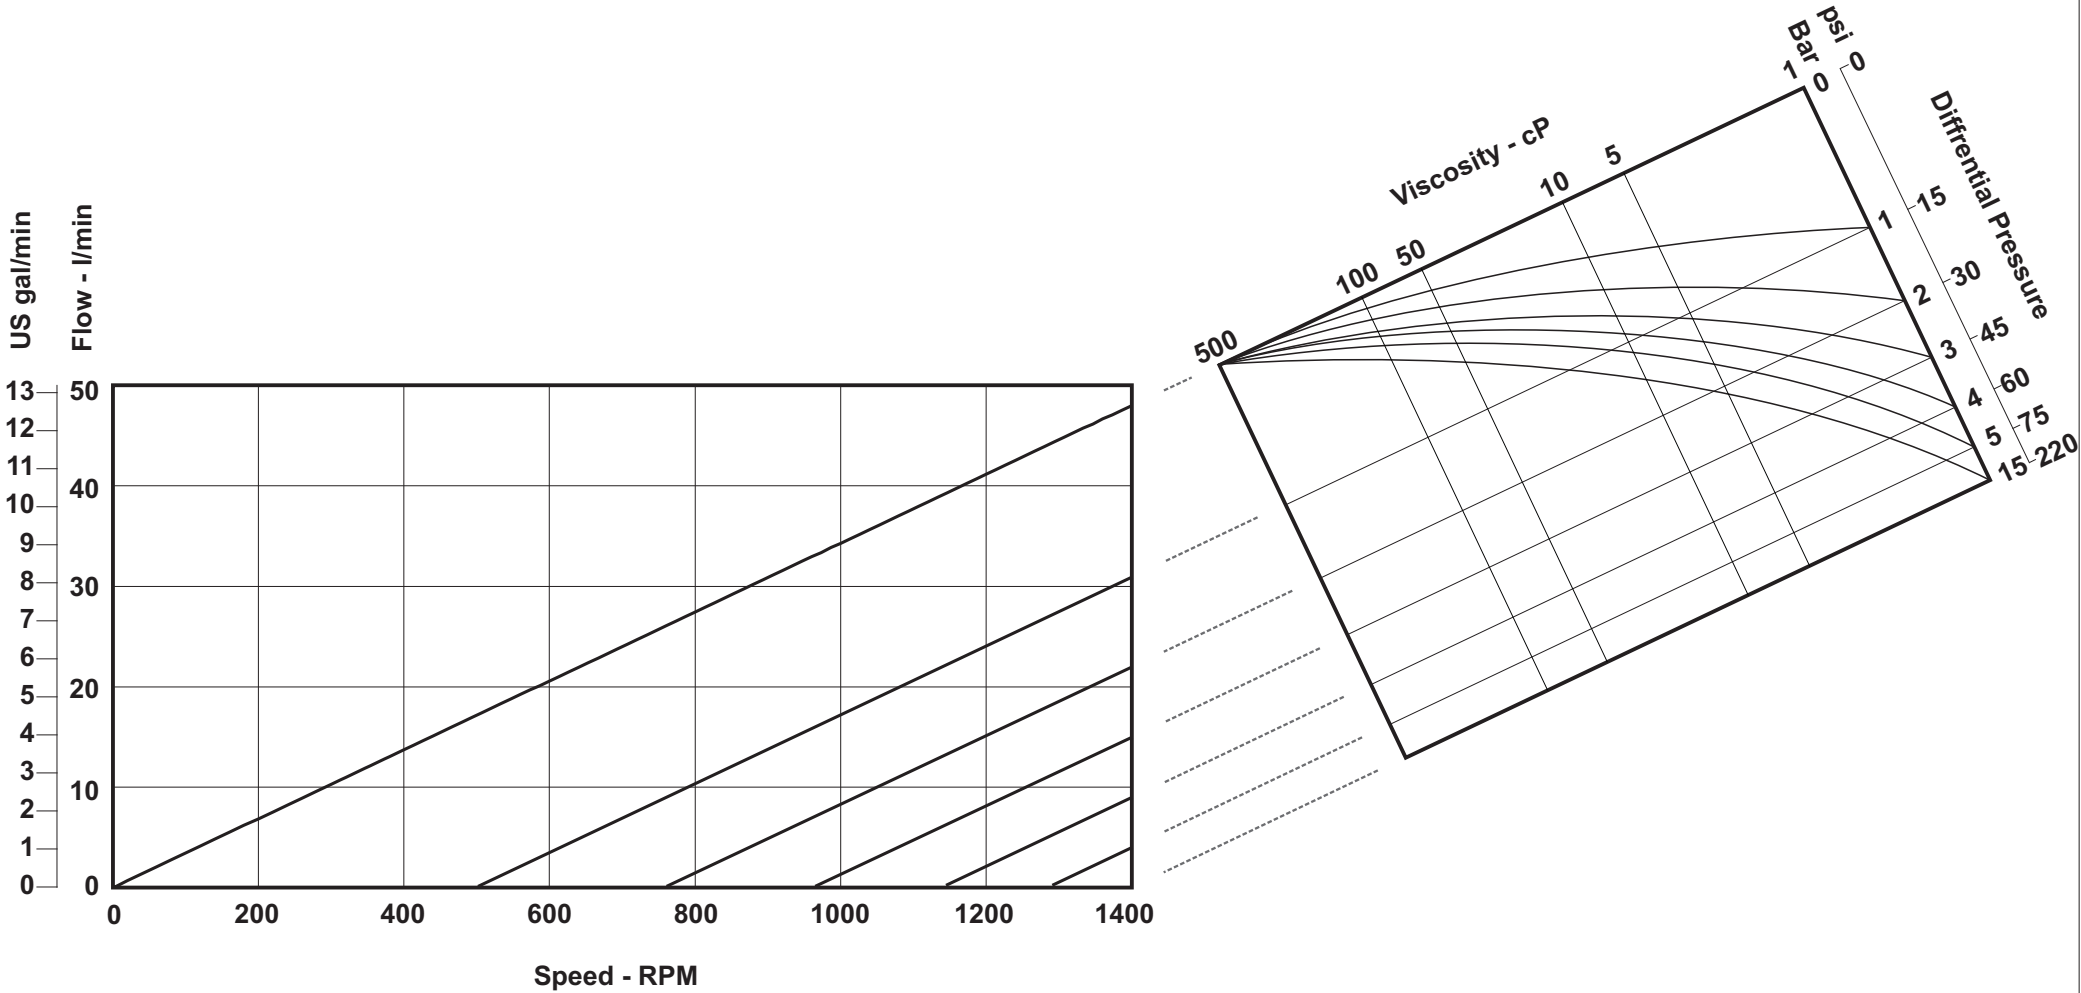

# Performance graph High temperature 180°C

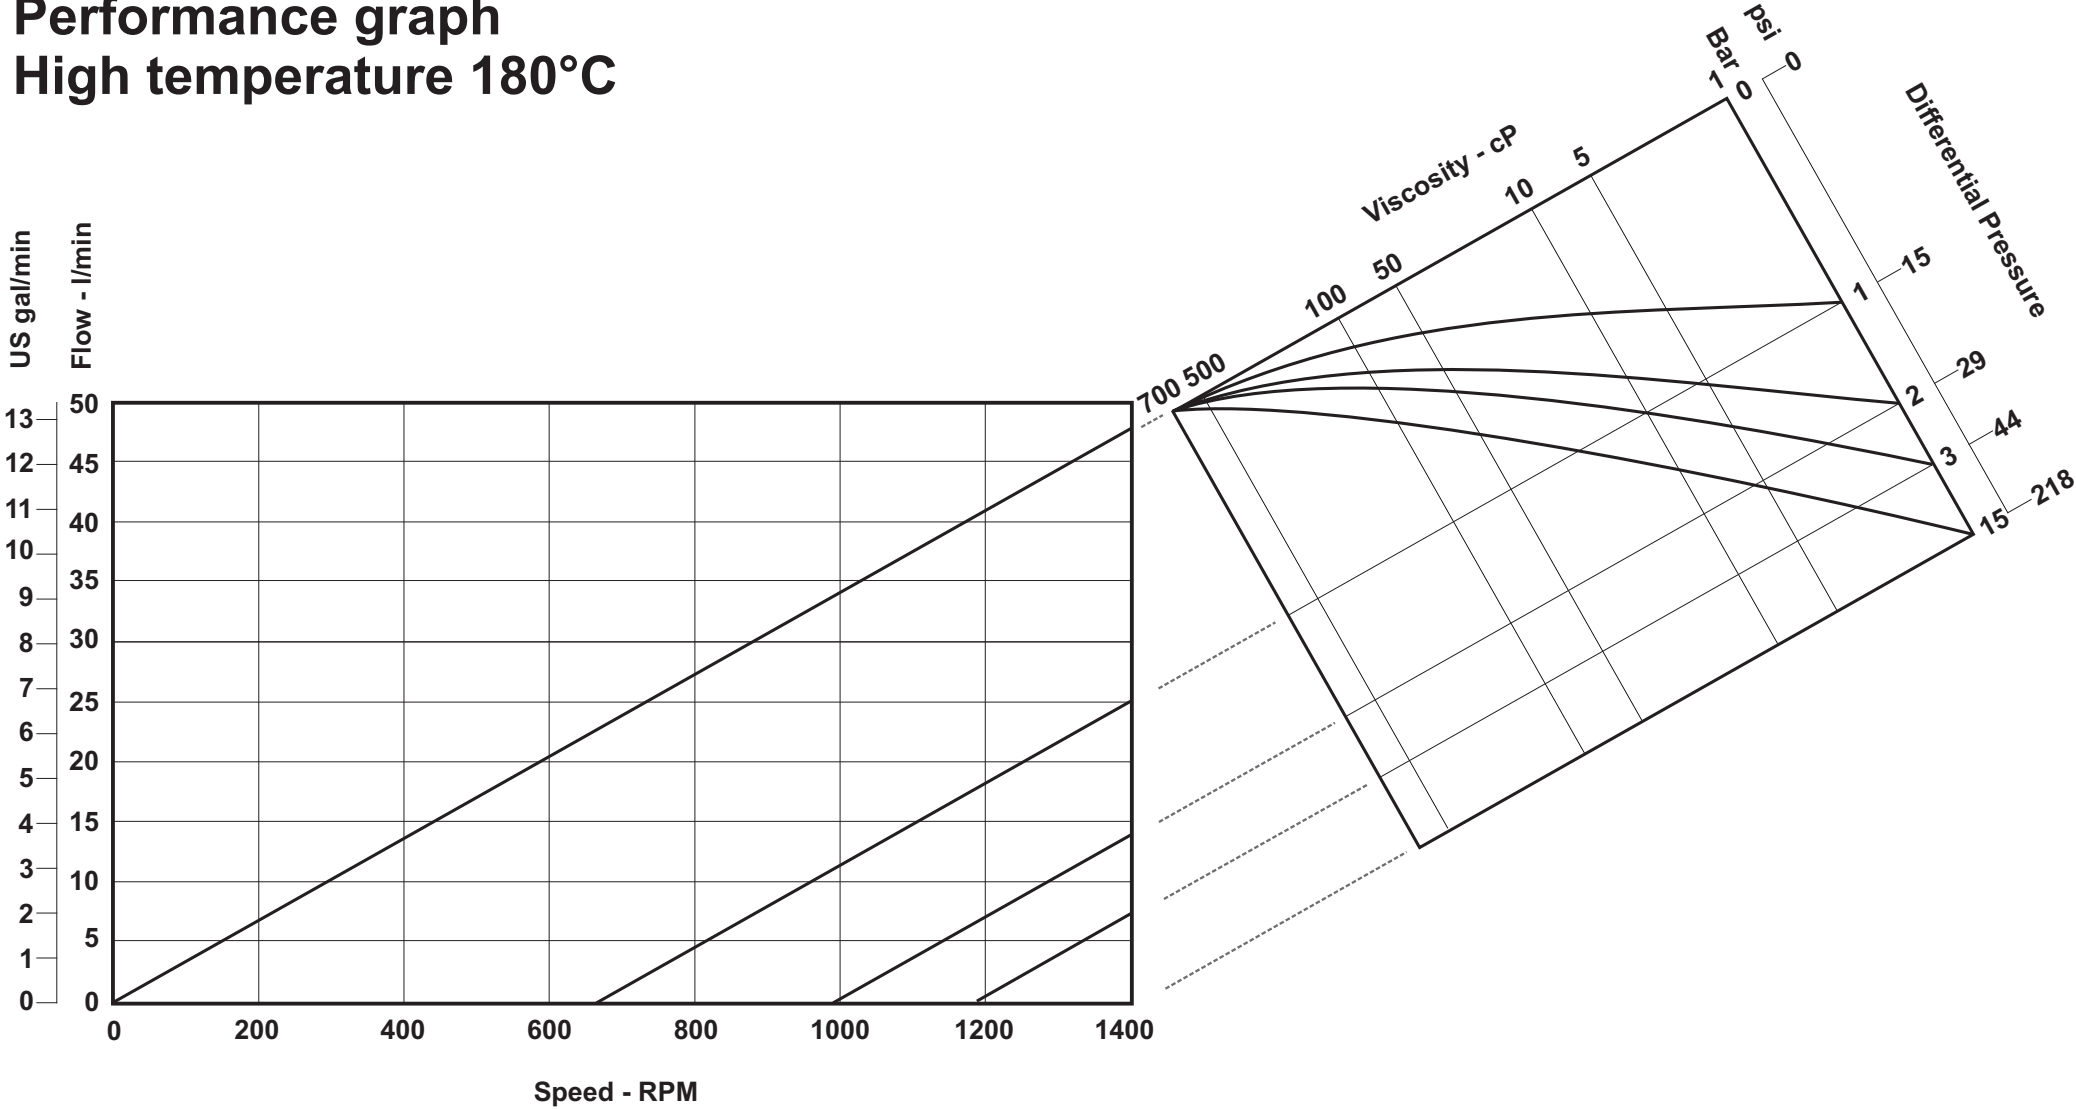

# Power and N.P.S.H.R graph

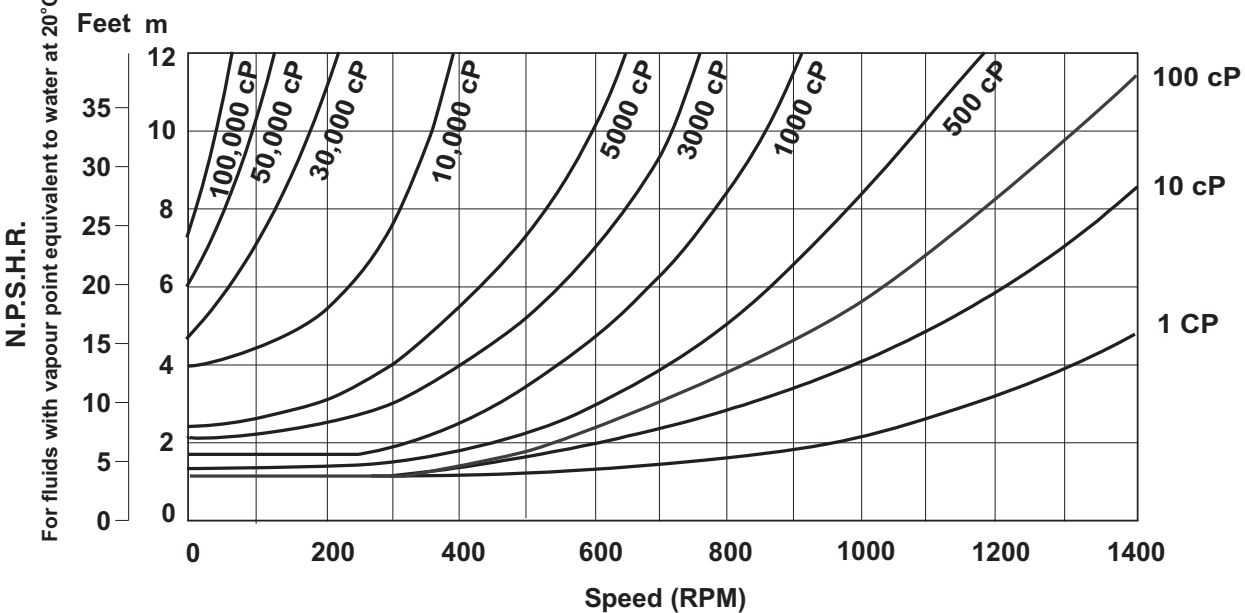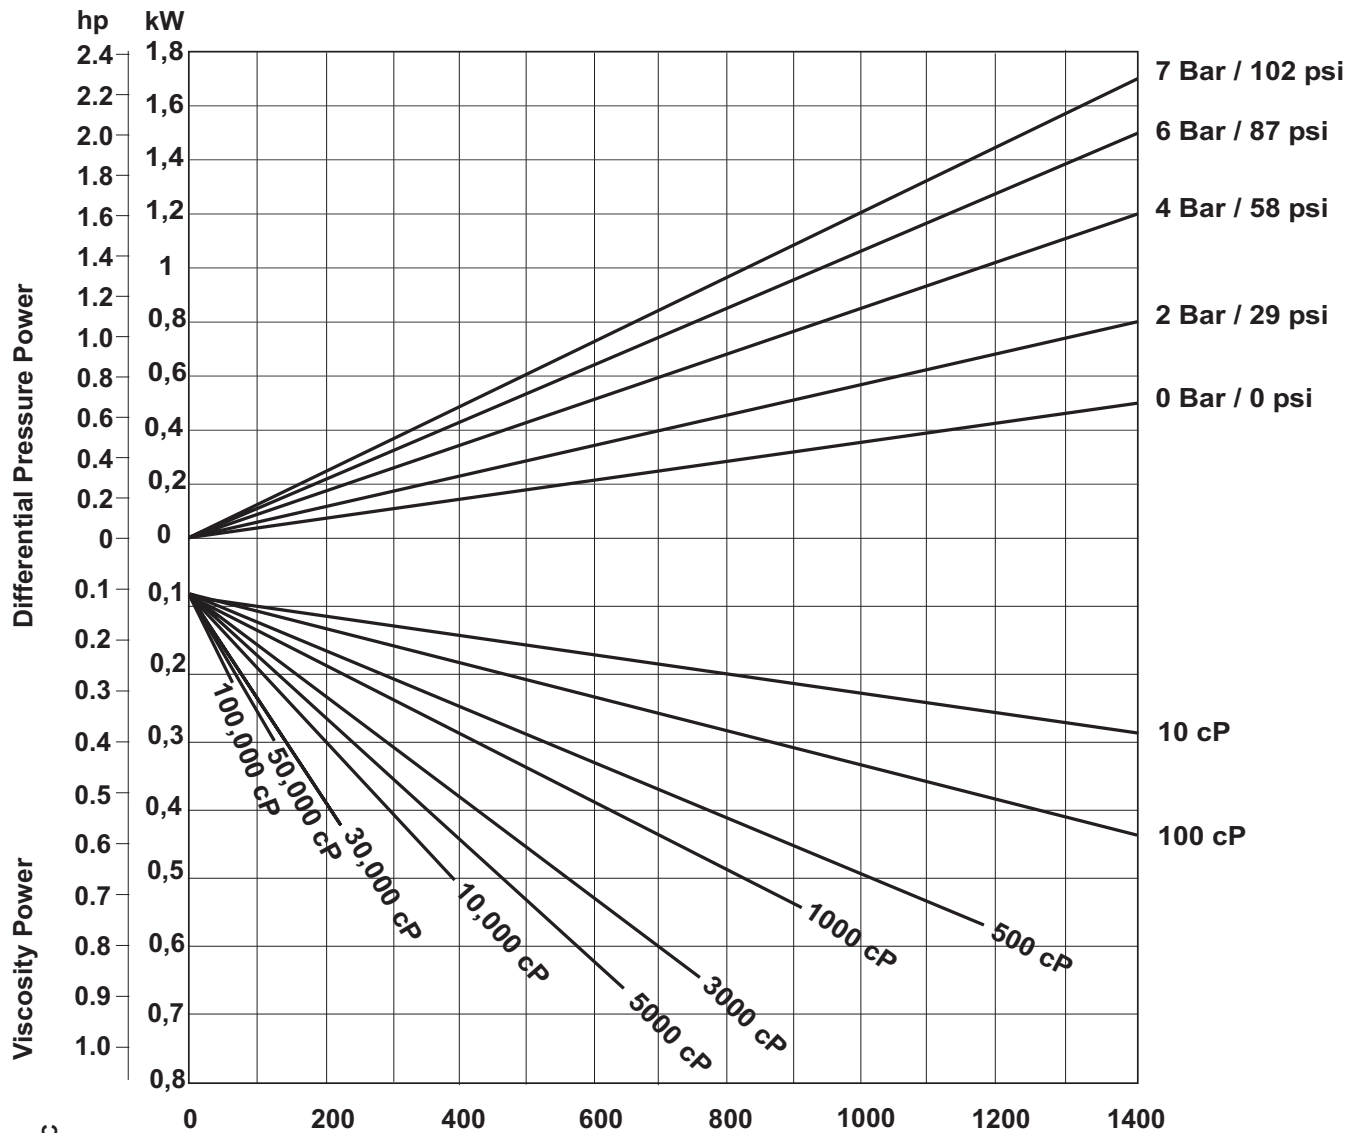


NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.


Max. shaft input torque - 35 Nm / 310 inlb





# Performance graph High Efficiency

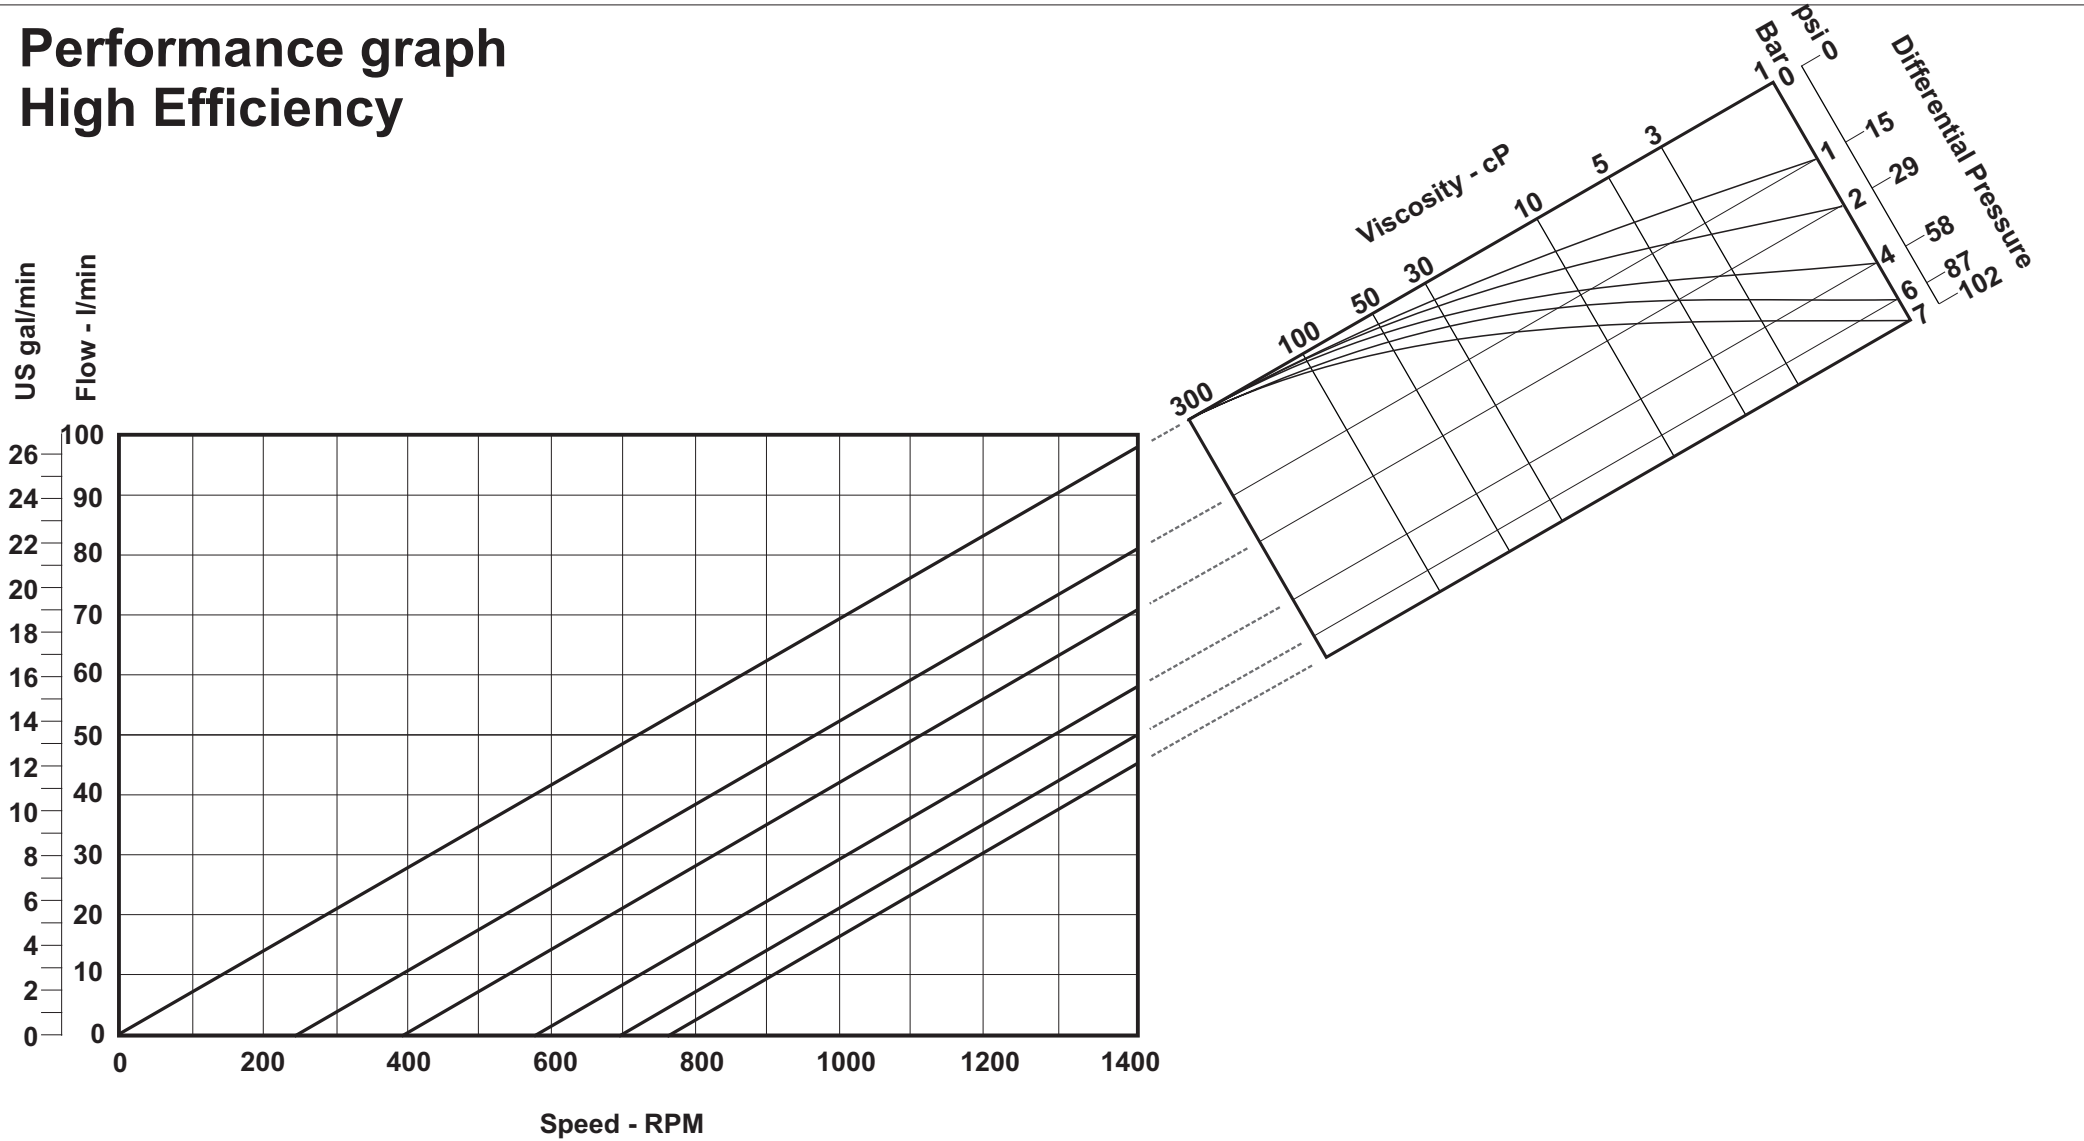


# Performance graph Multi-Duty

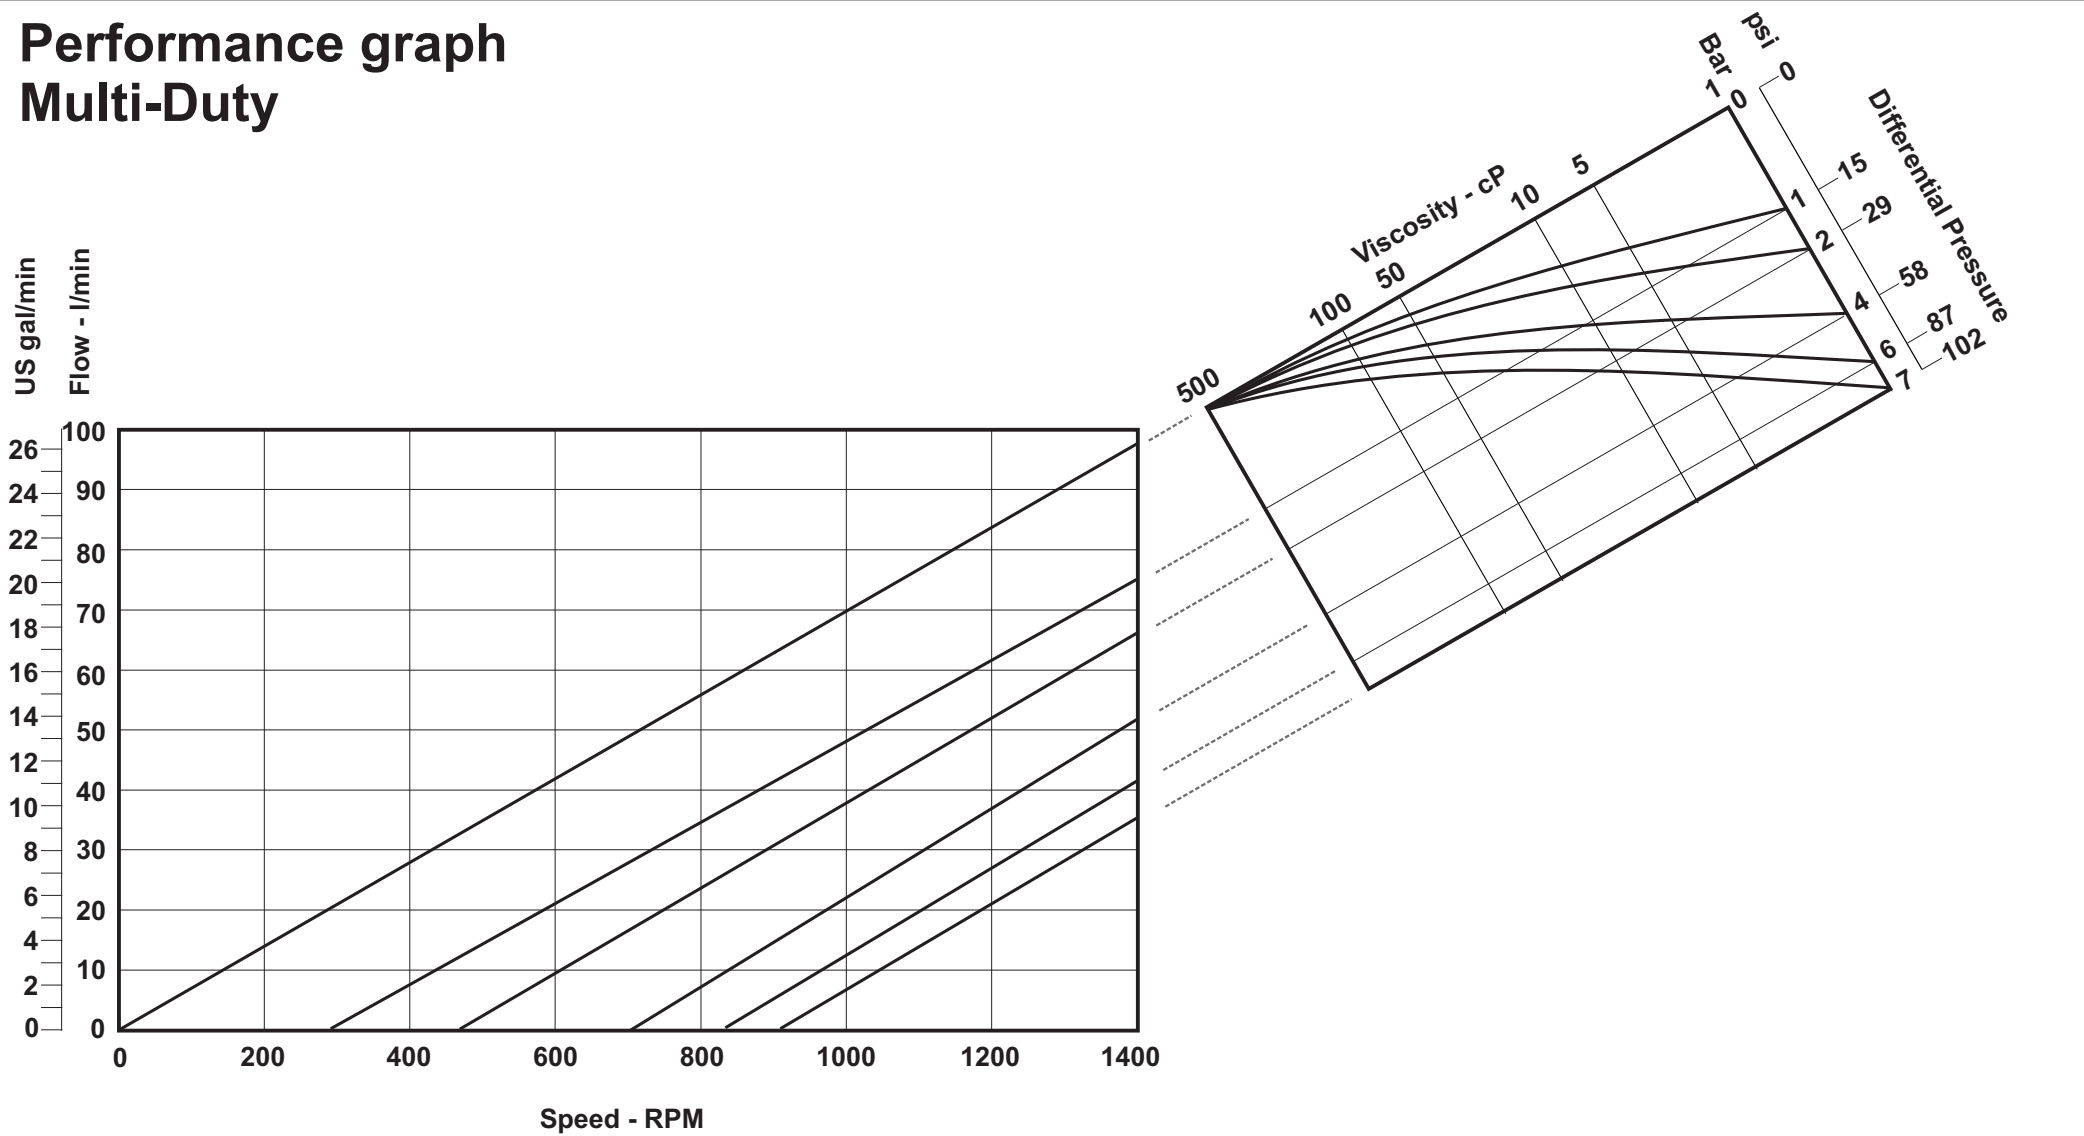

# Performance graph High temperature 180°C

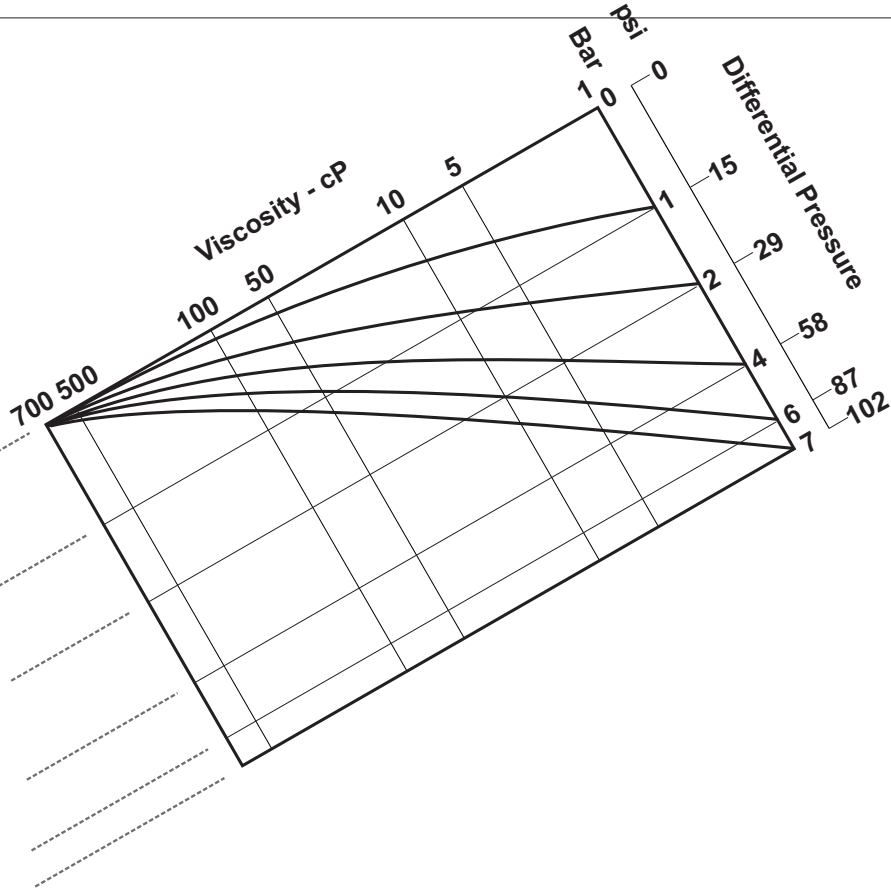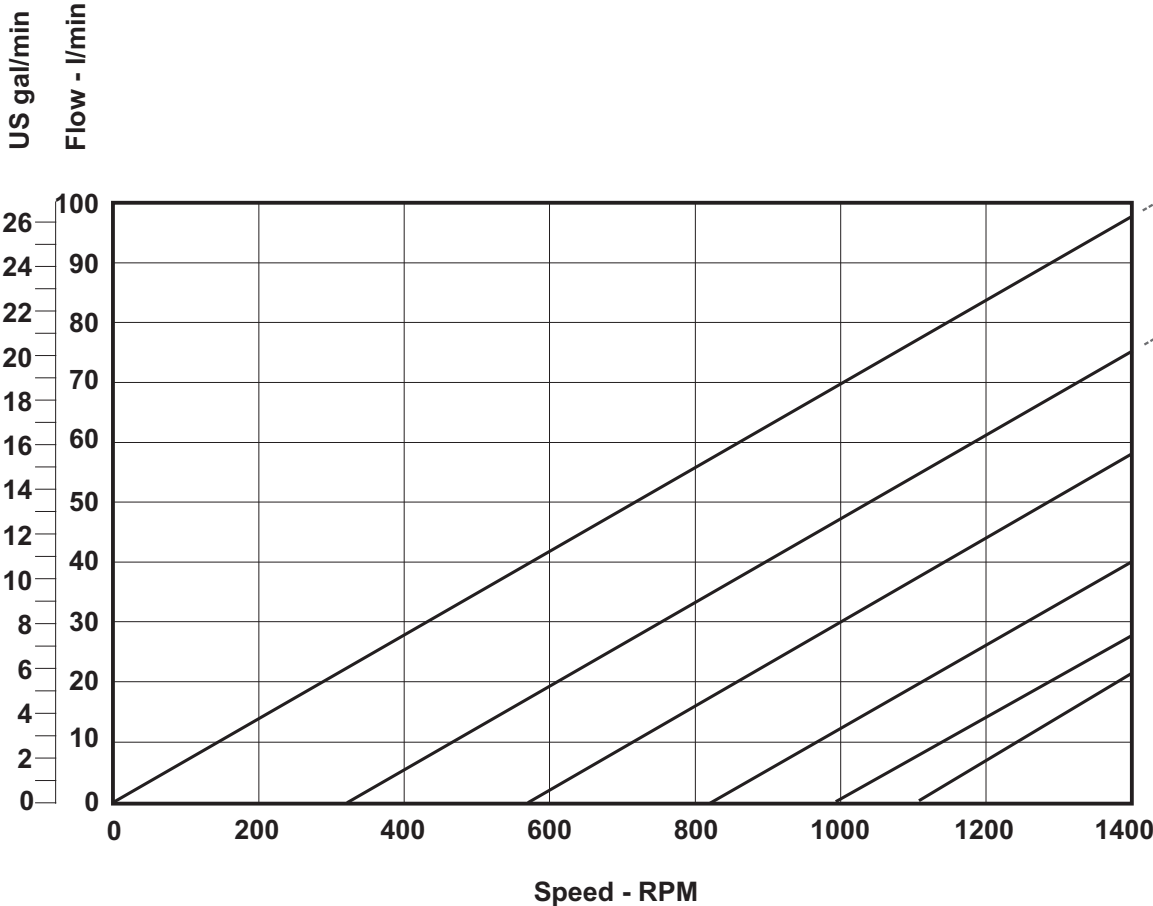

# Power and N.P.S.H.R graph

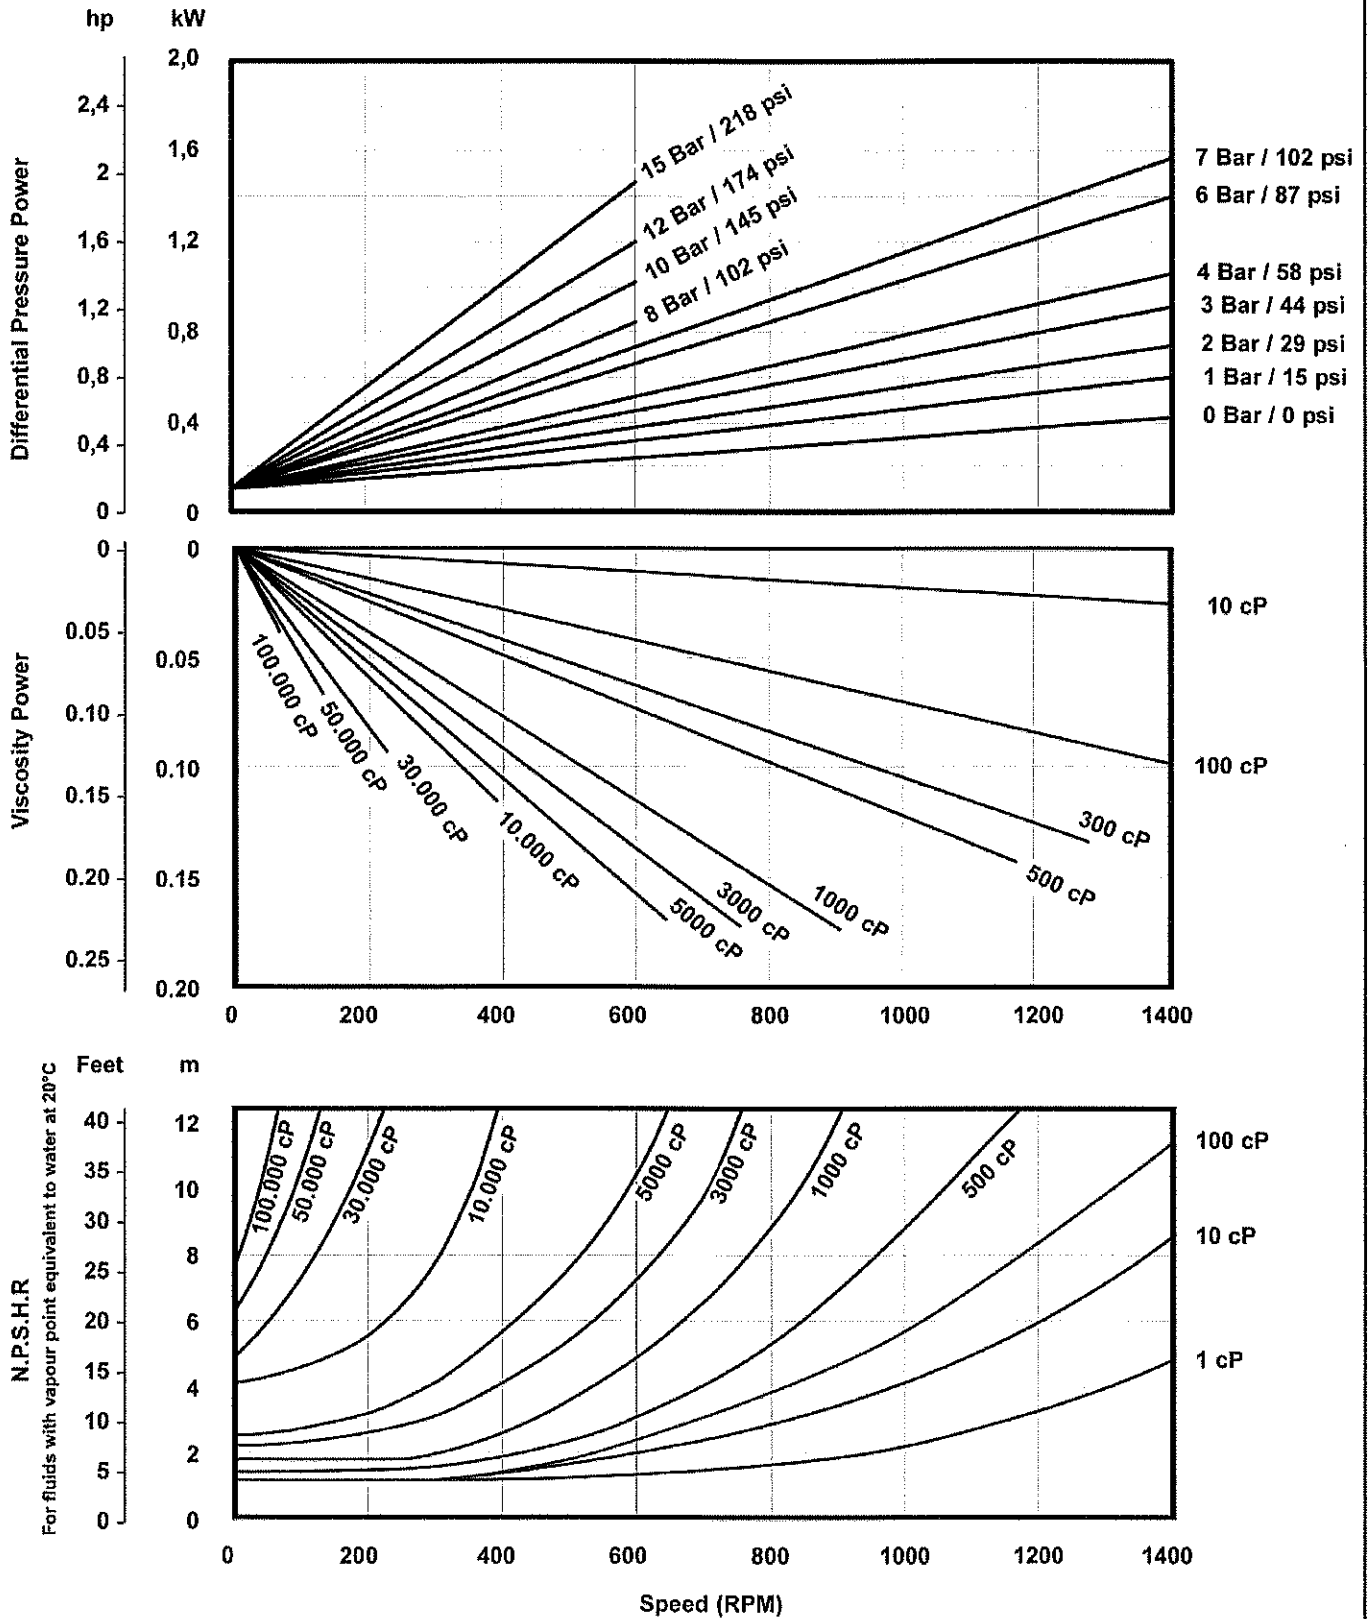

NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.

Max. shaft input torque - 35 Nm/ 310 inbl

DW1/007/15\_600

# Performance graph Multi-Duty

