
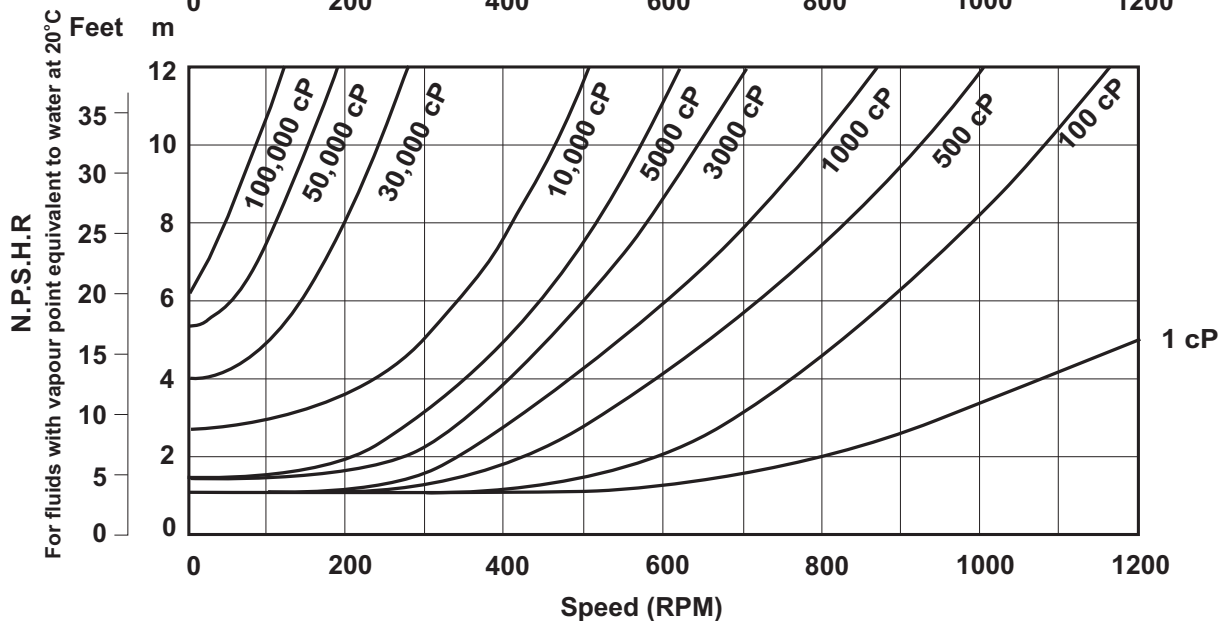



Power and N.P.S.H.R graph

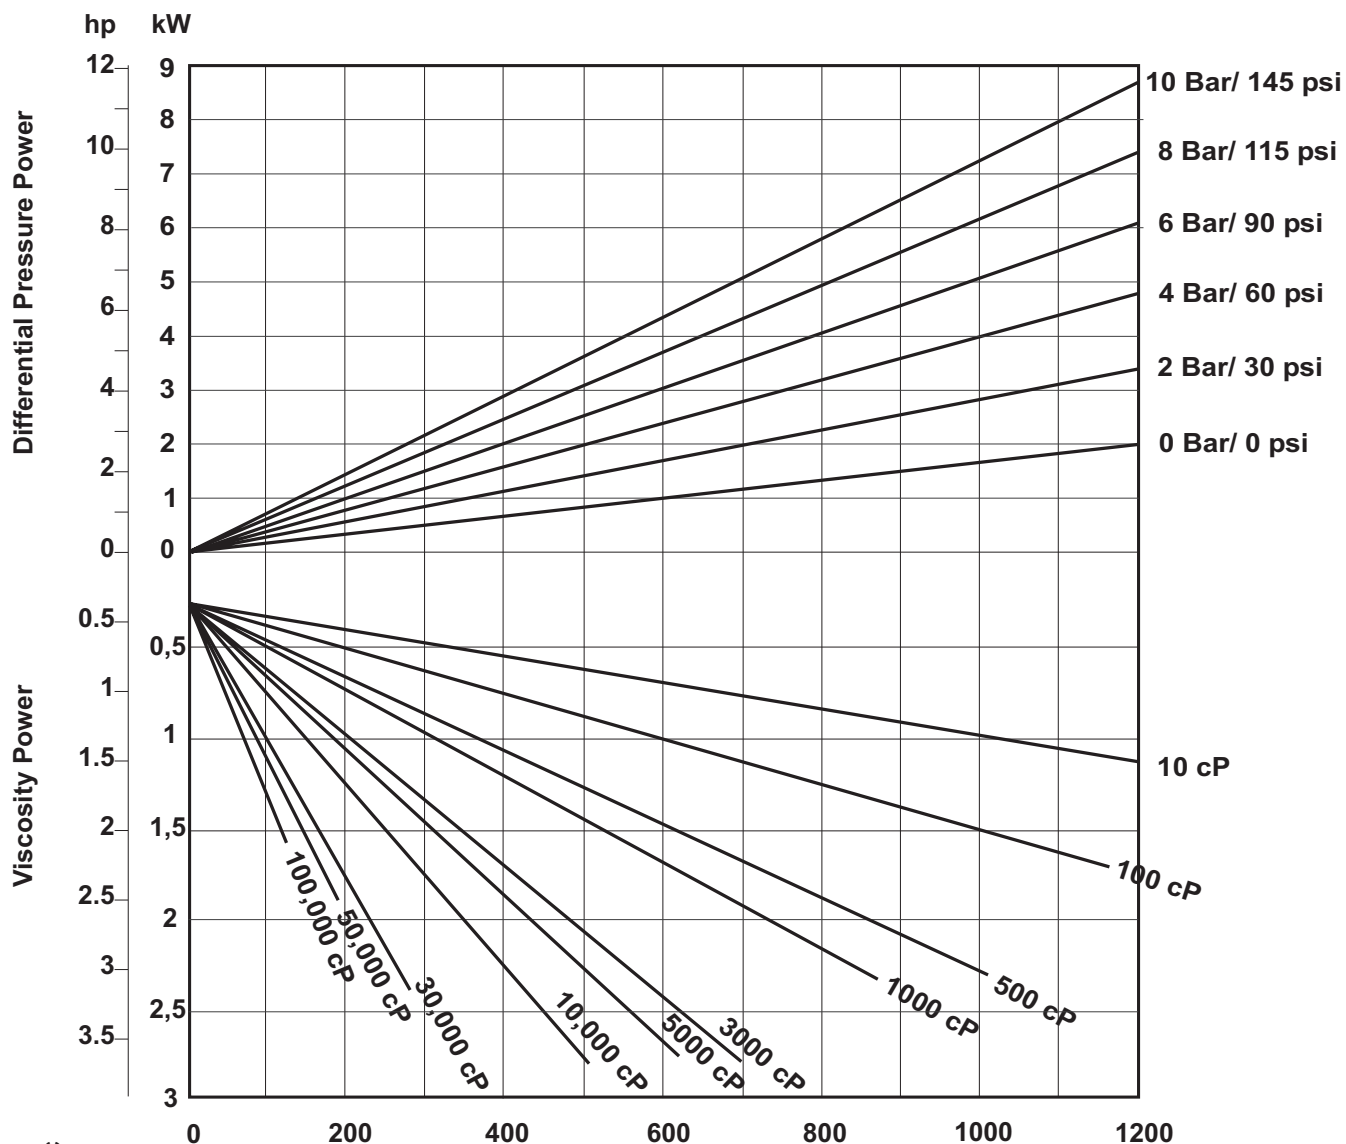


NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.

Max. shaft input torque - 250 Nm/ 2210 inlb



Performance graph High Efficiency

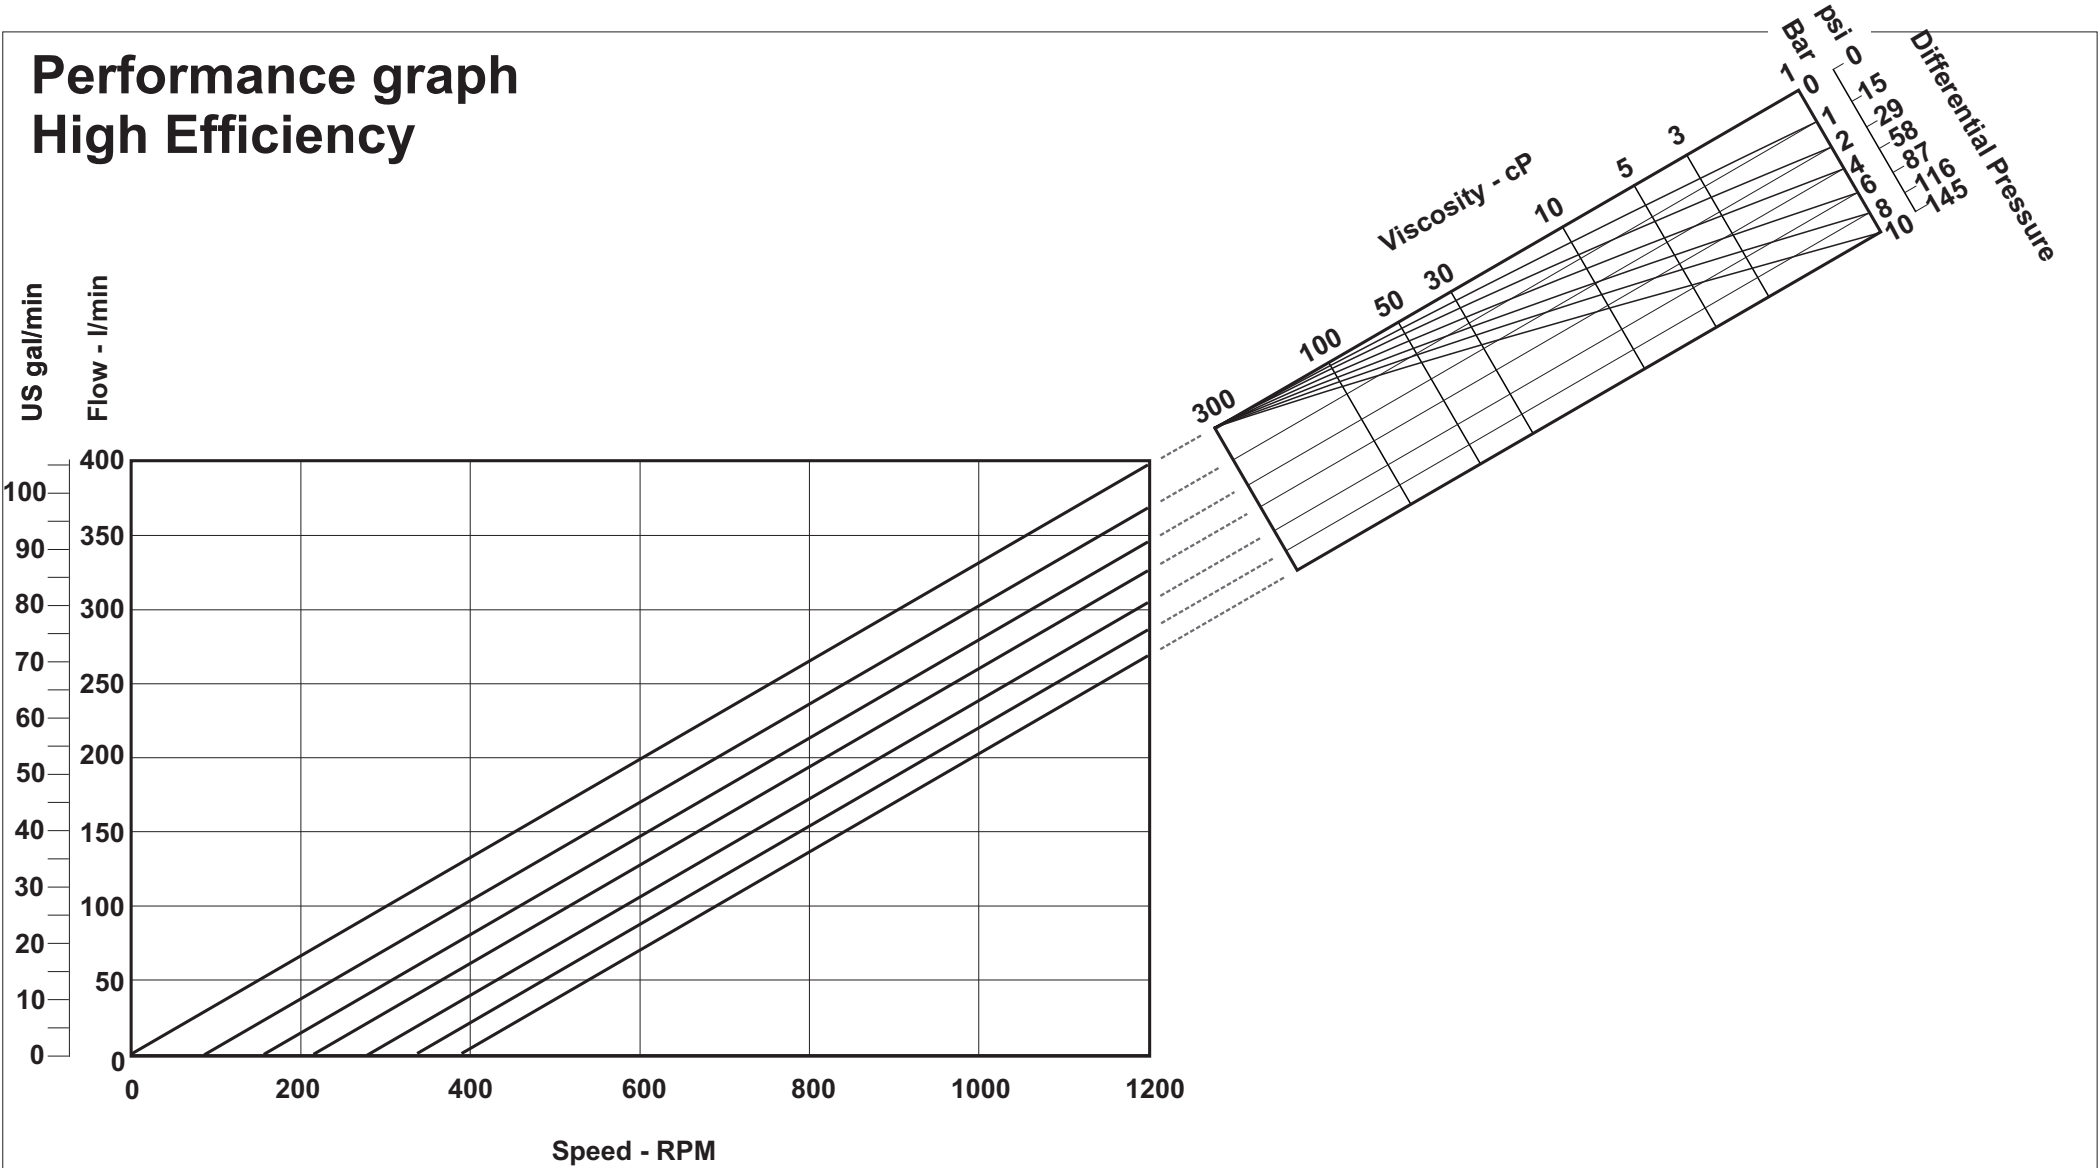

Performance graph Multi-Duty

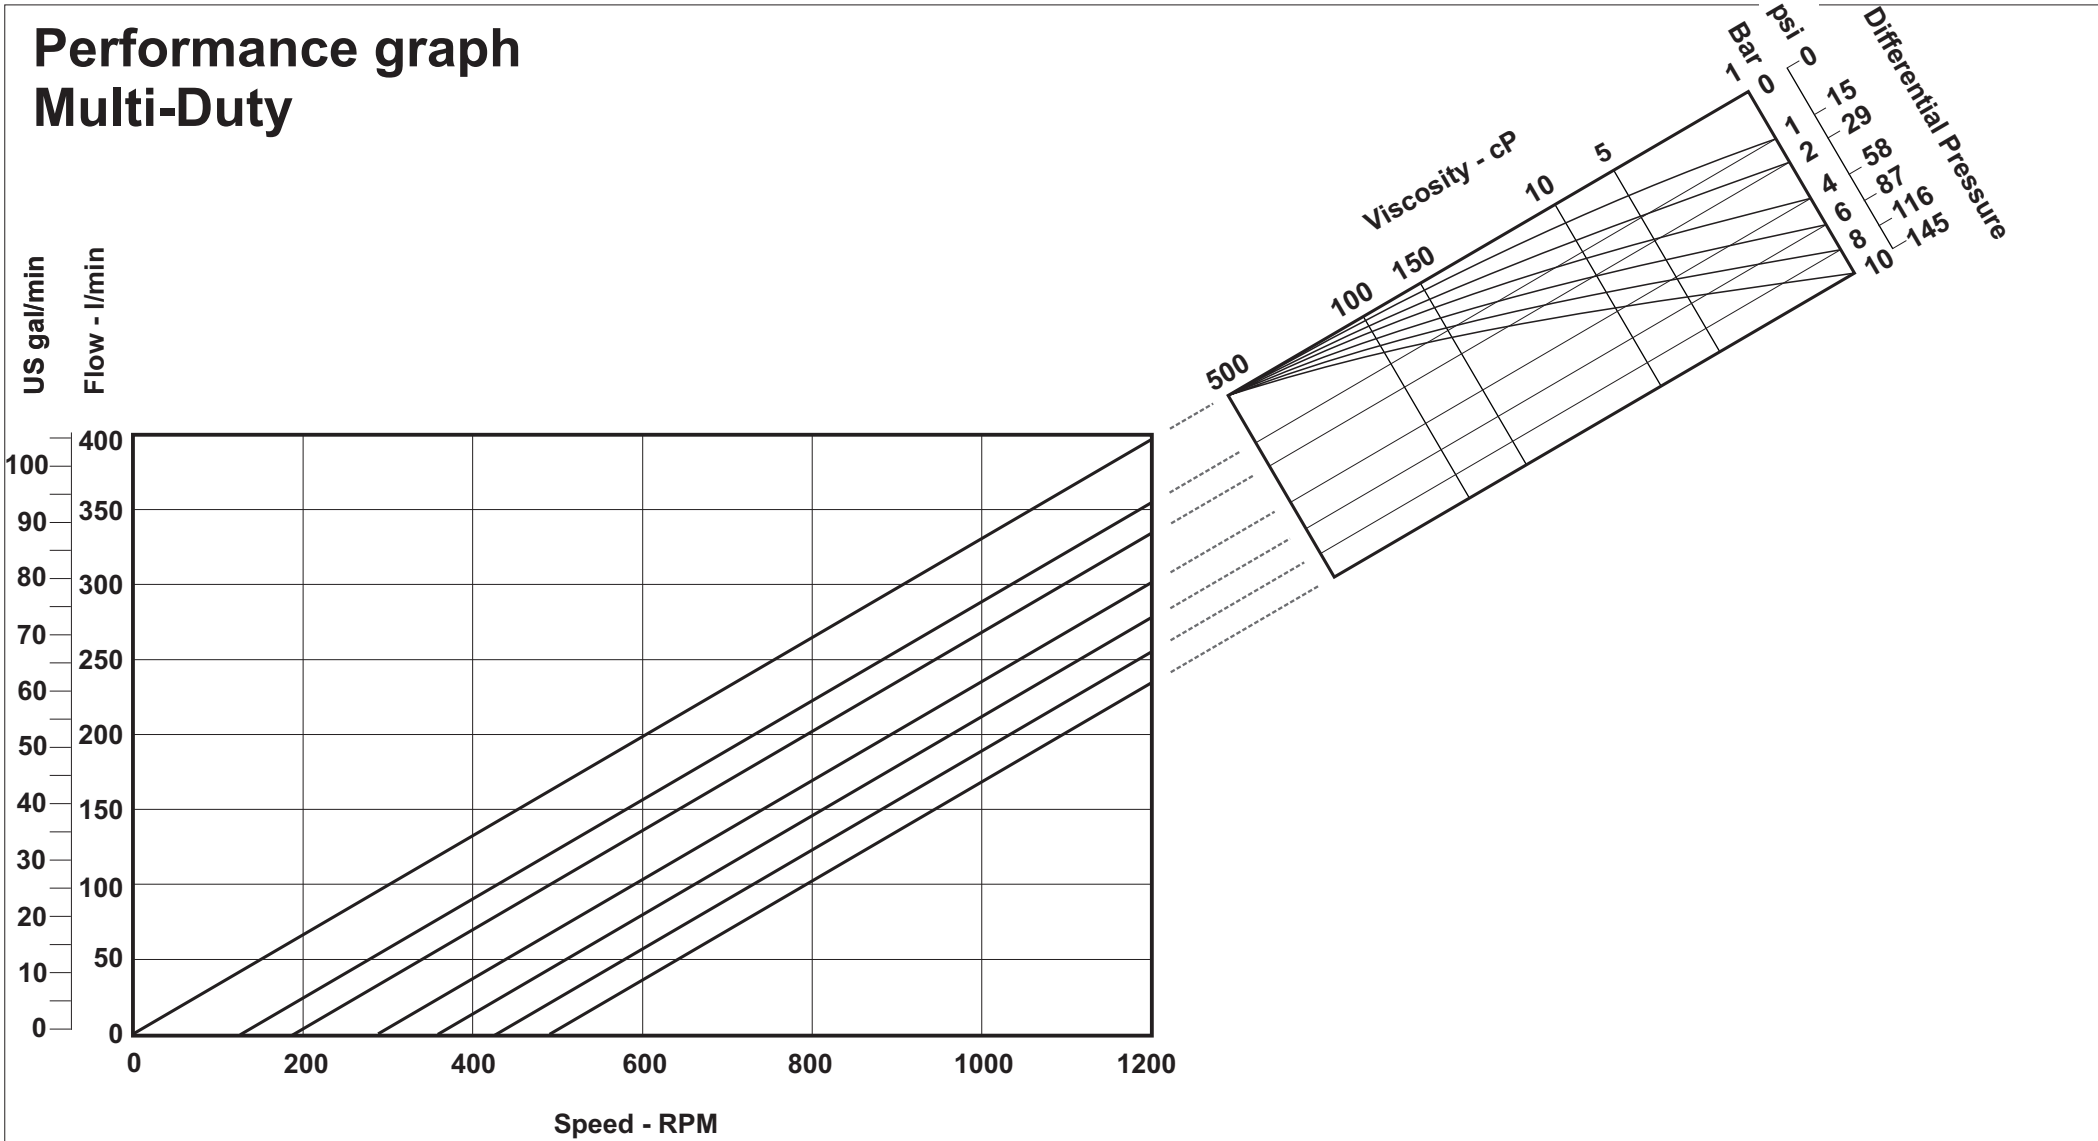


Power and N.P.S.H.R graph

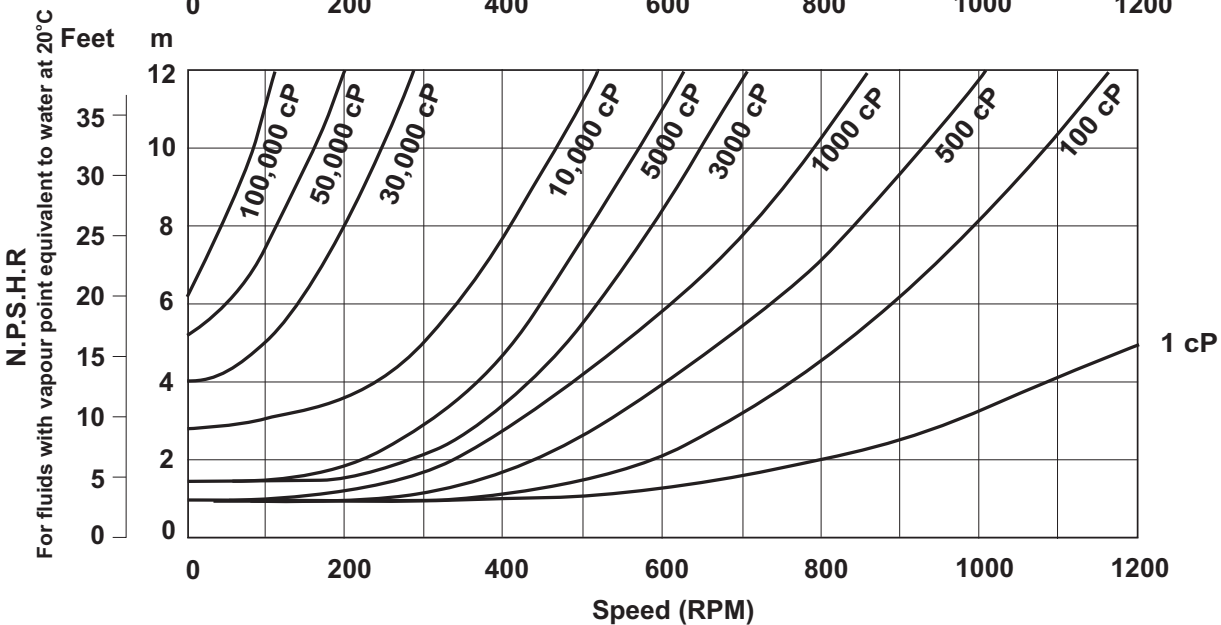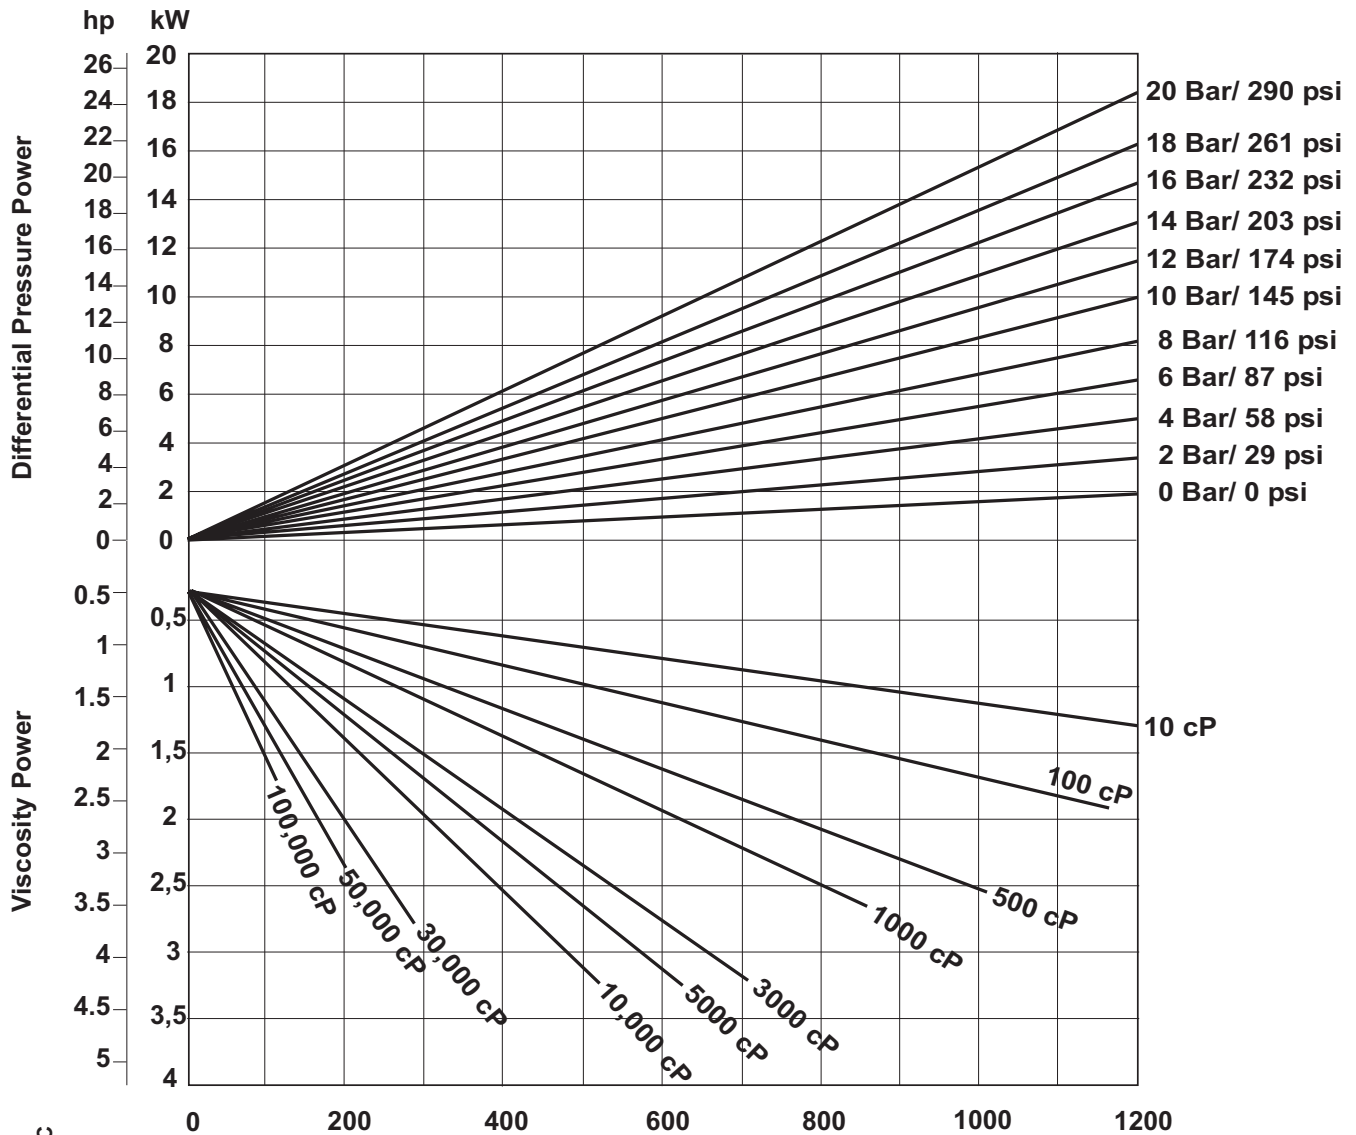


NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.

Max. shaft input torque - 250 Nm/ 2210 inlb


Performance graph High Efficiency

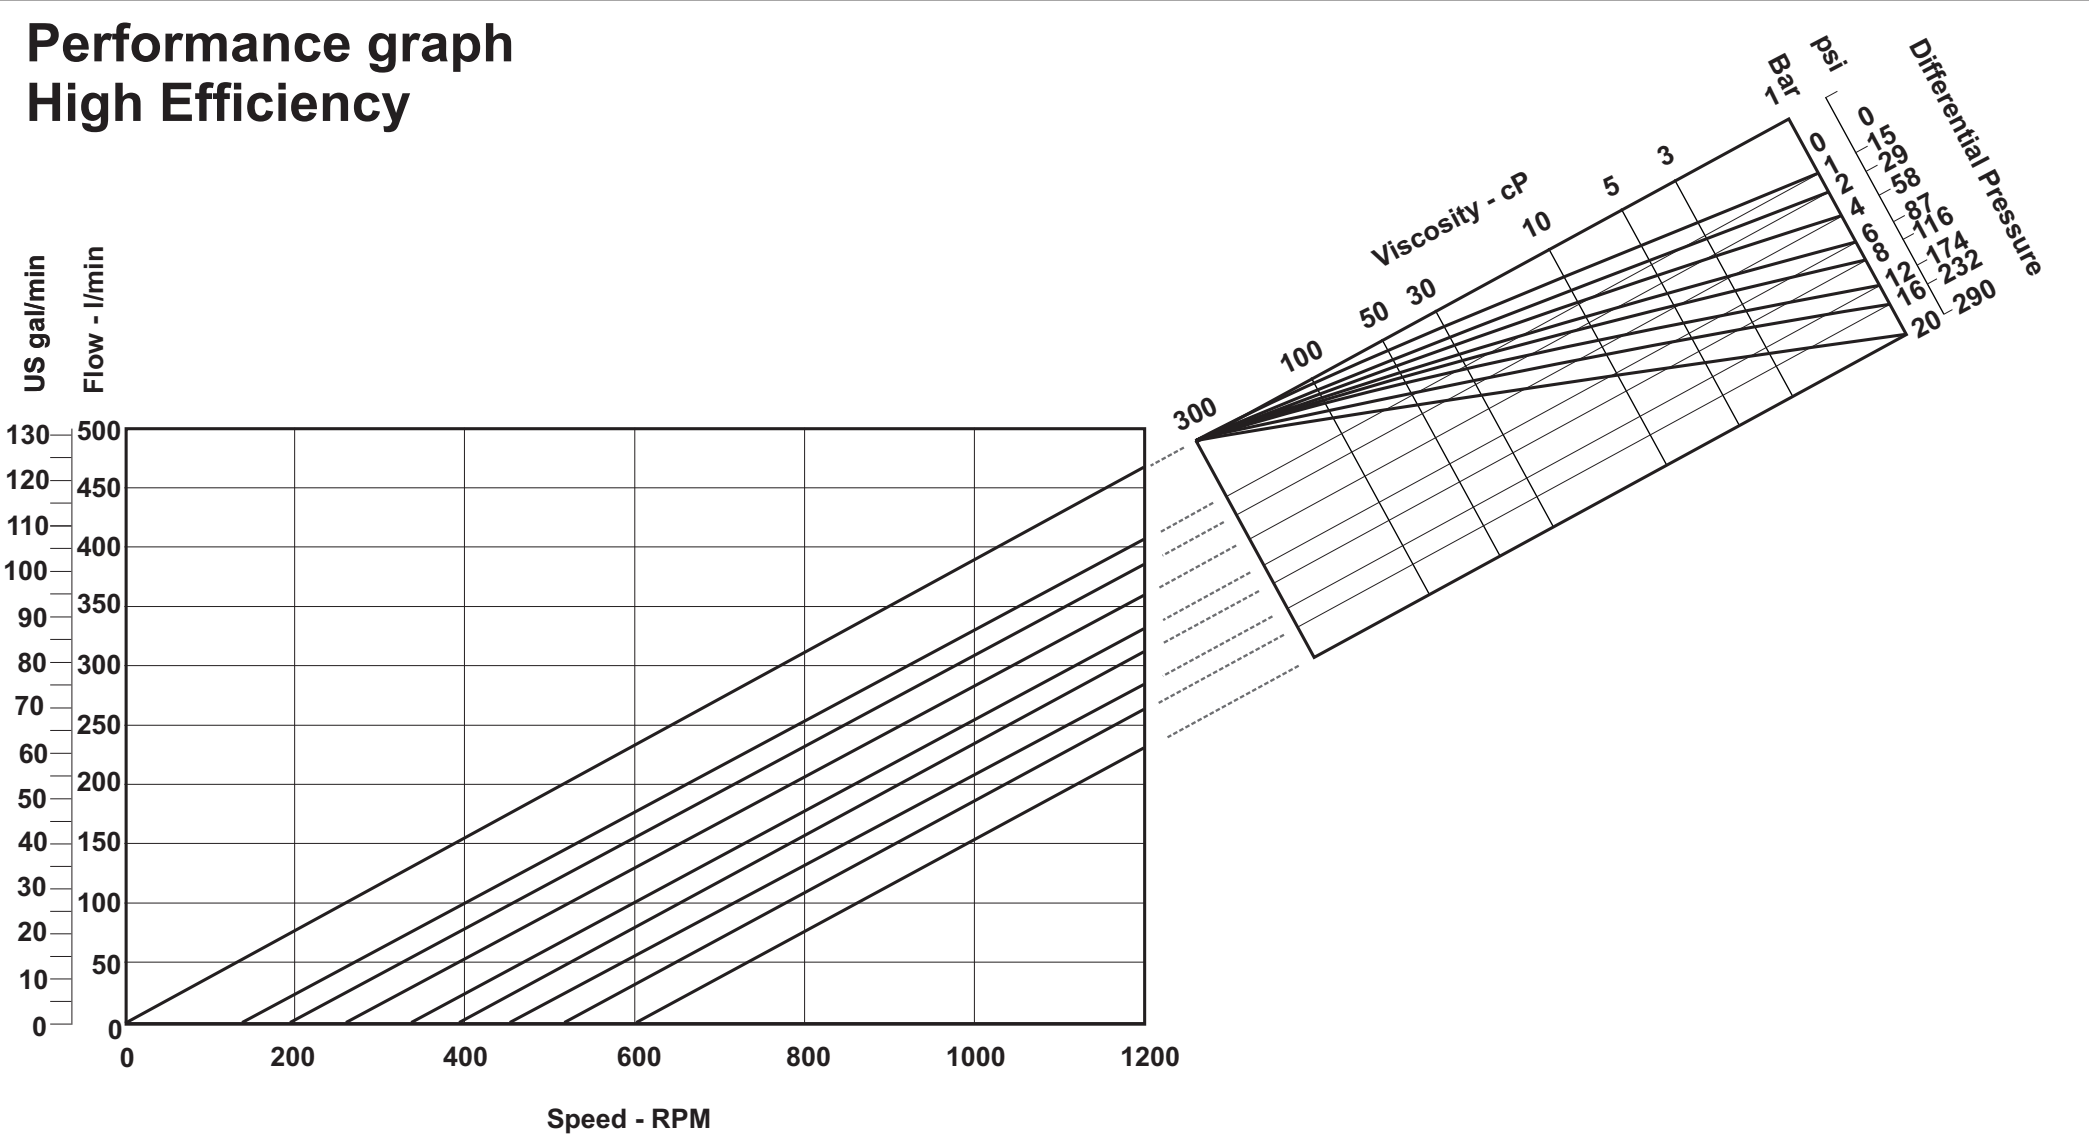



Performance graph Multi-Duty

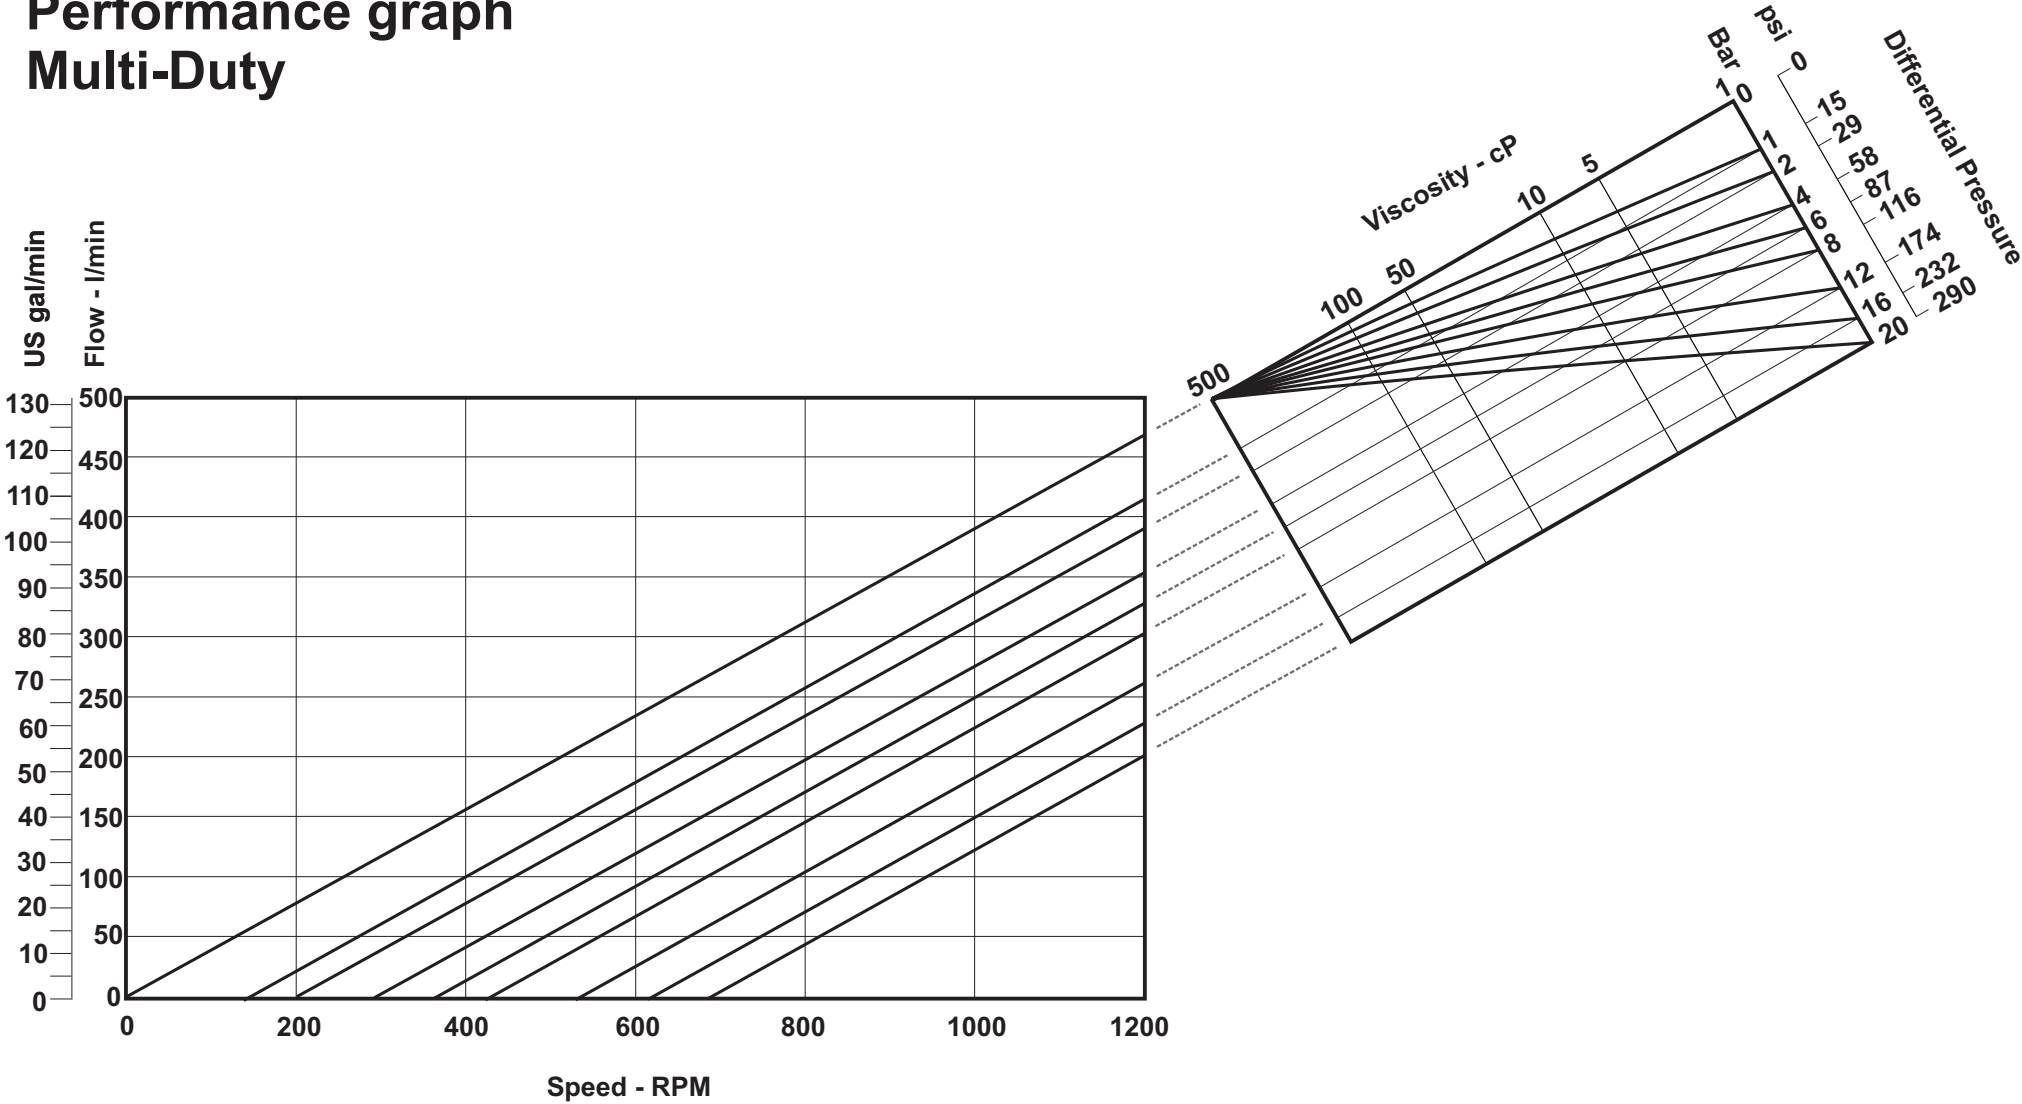

Performance graph High temperature 180°C

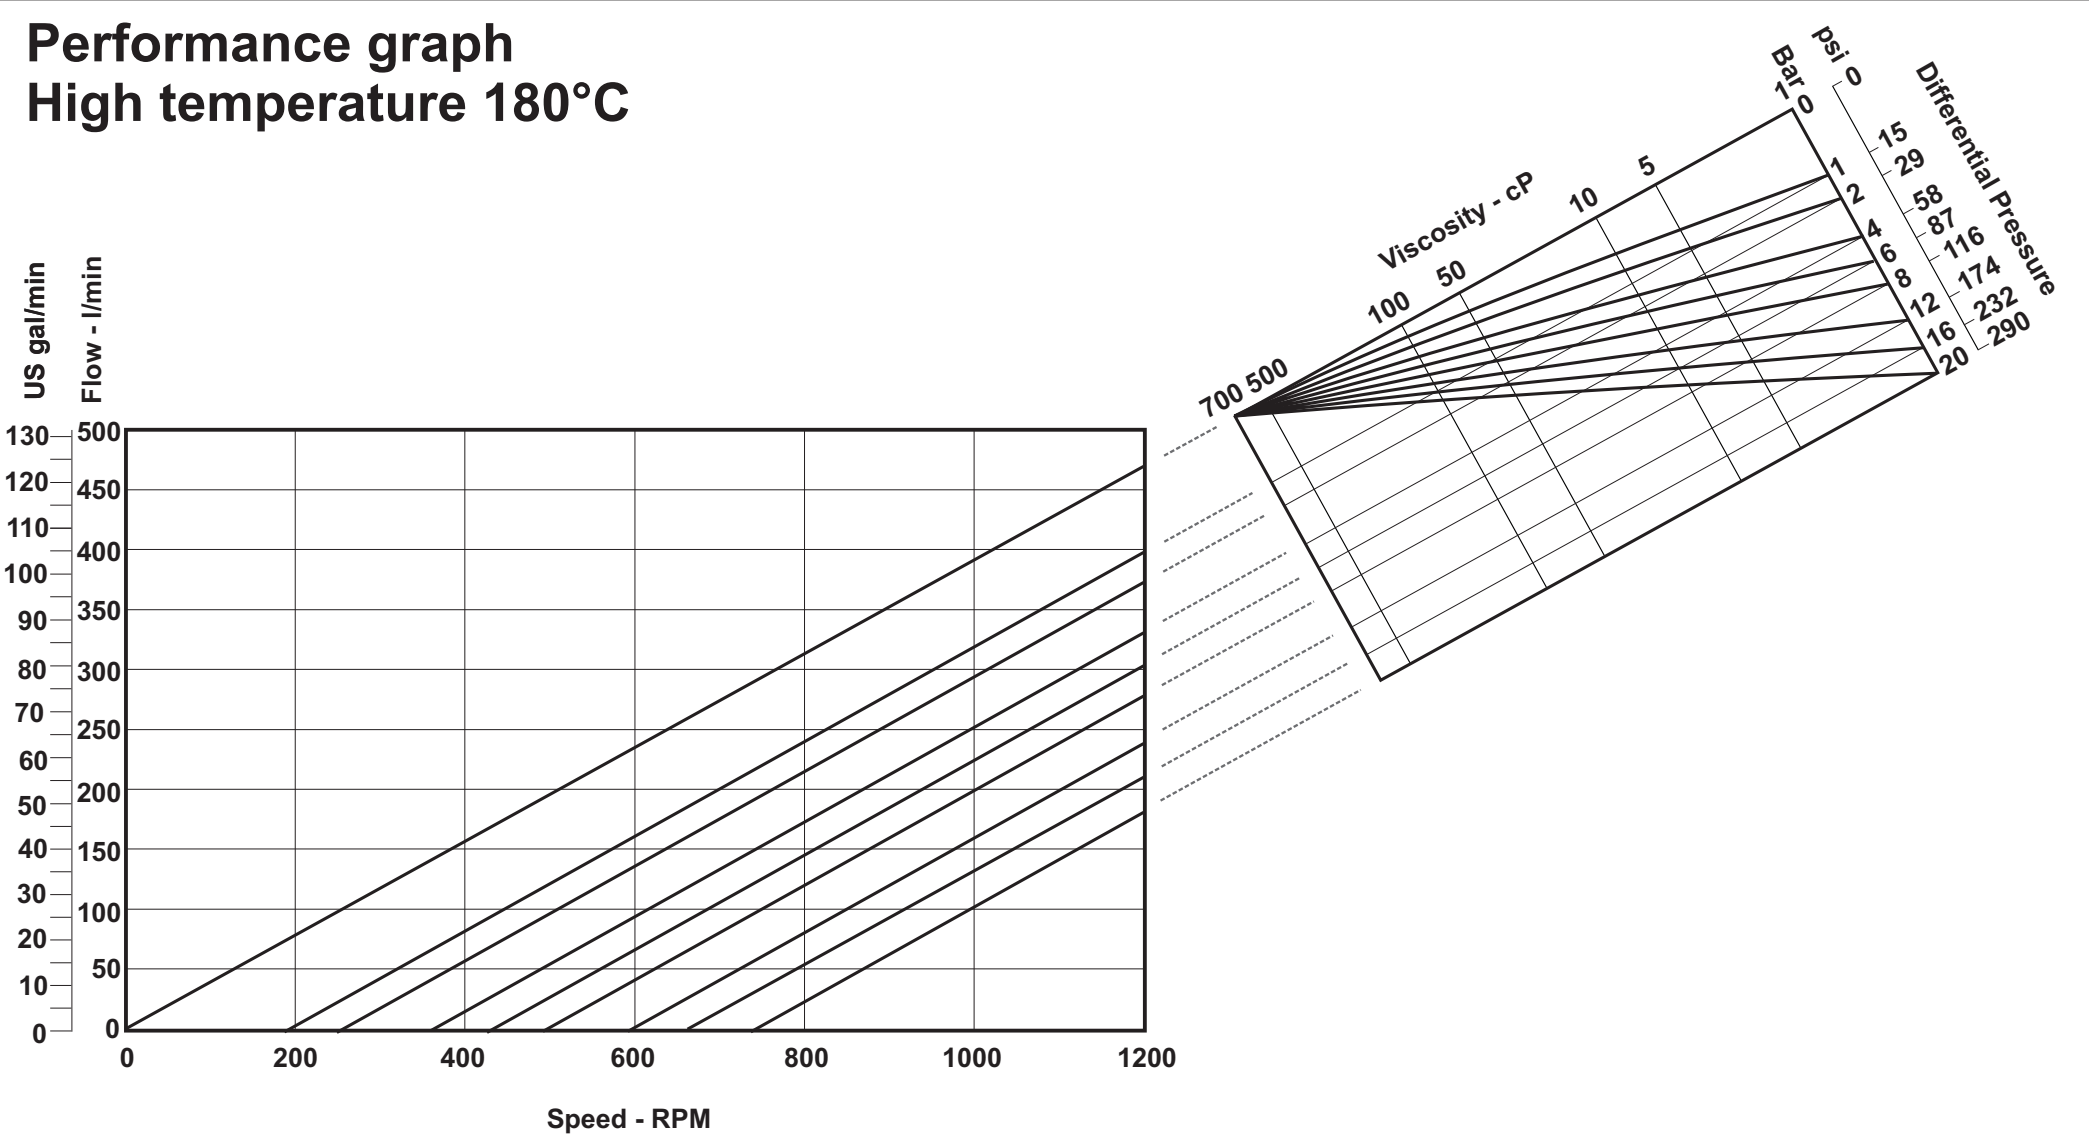


Power and N.P.S.H.R graph

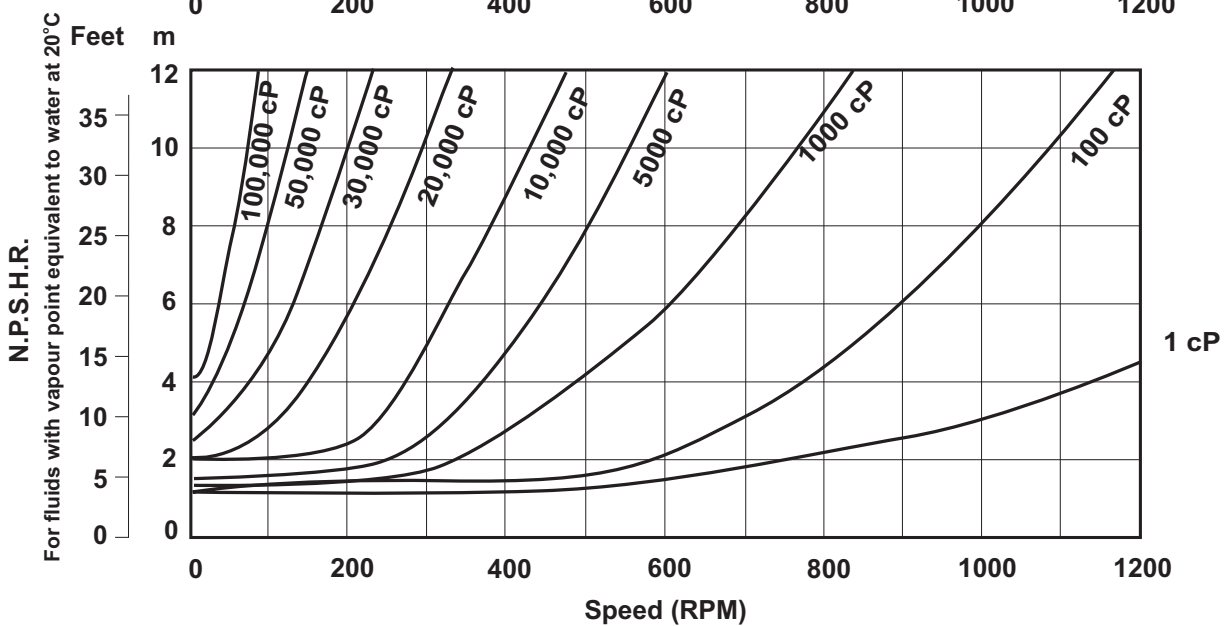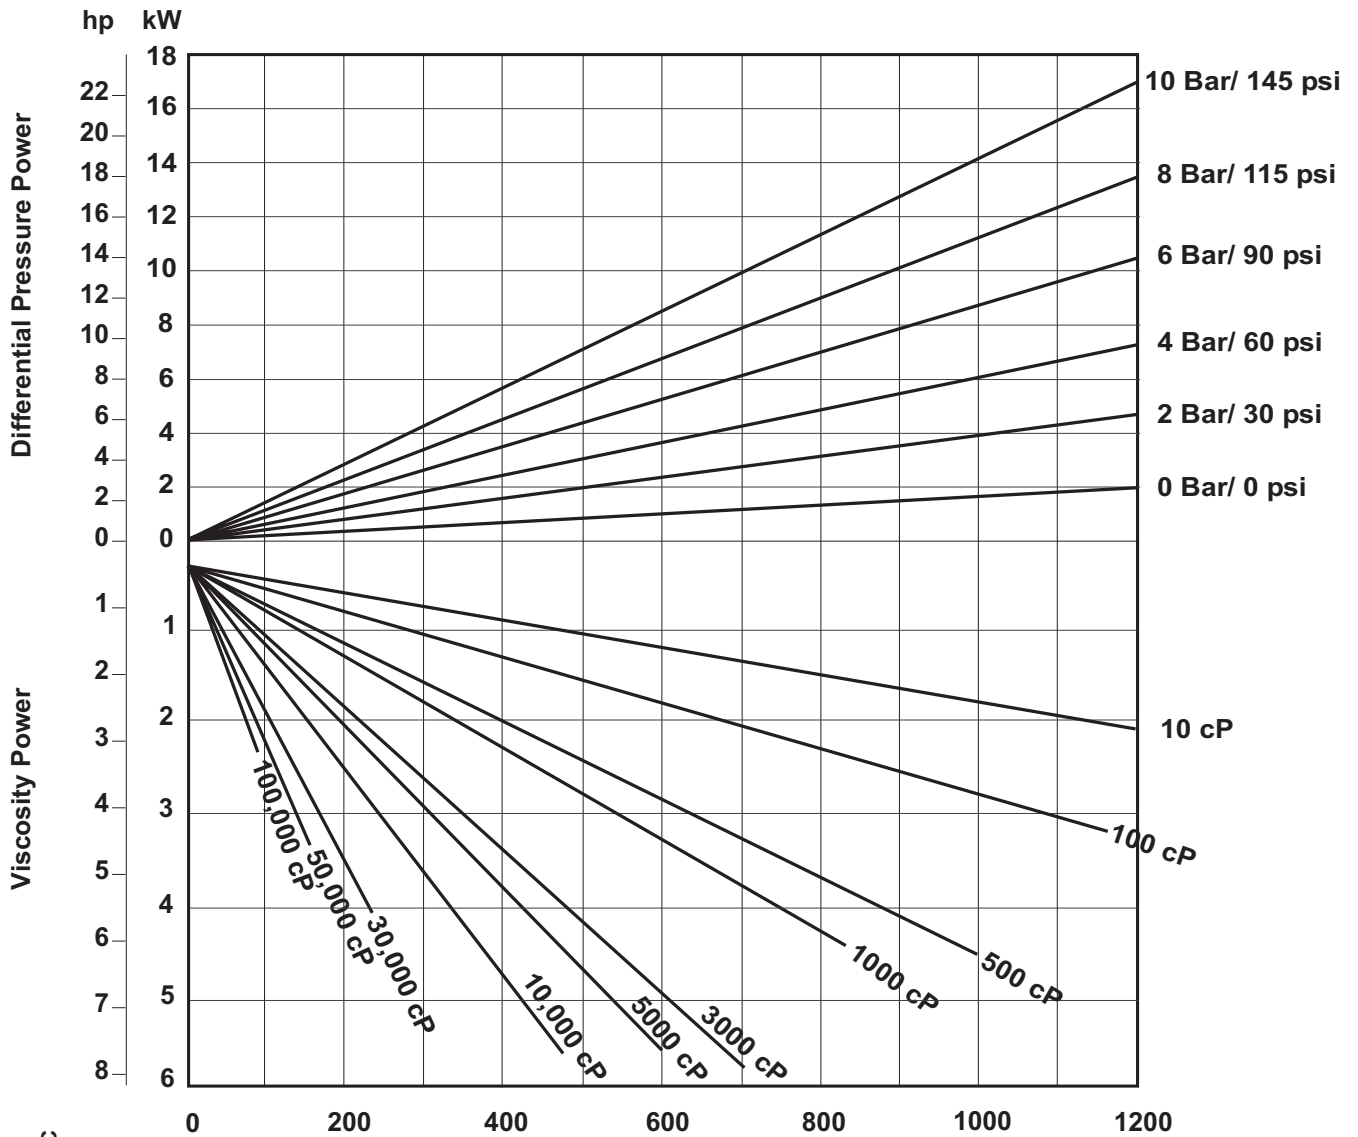



NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.

Max. shaft input torque - 250 Nm/ 2210 inlb



Performance graph High Efficiency

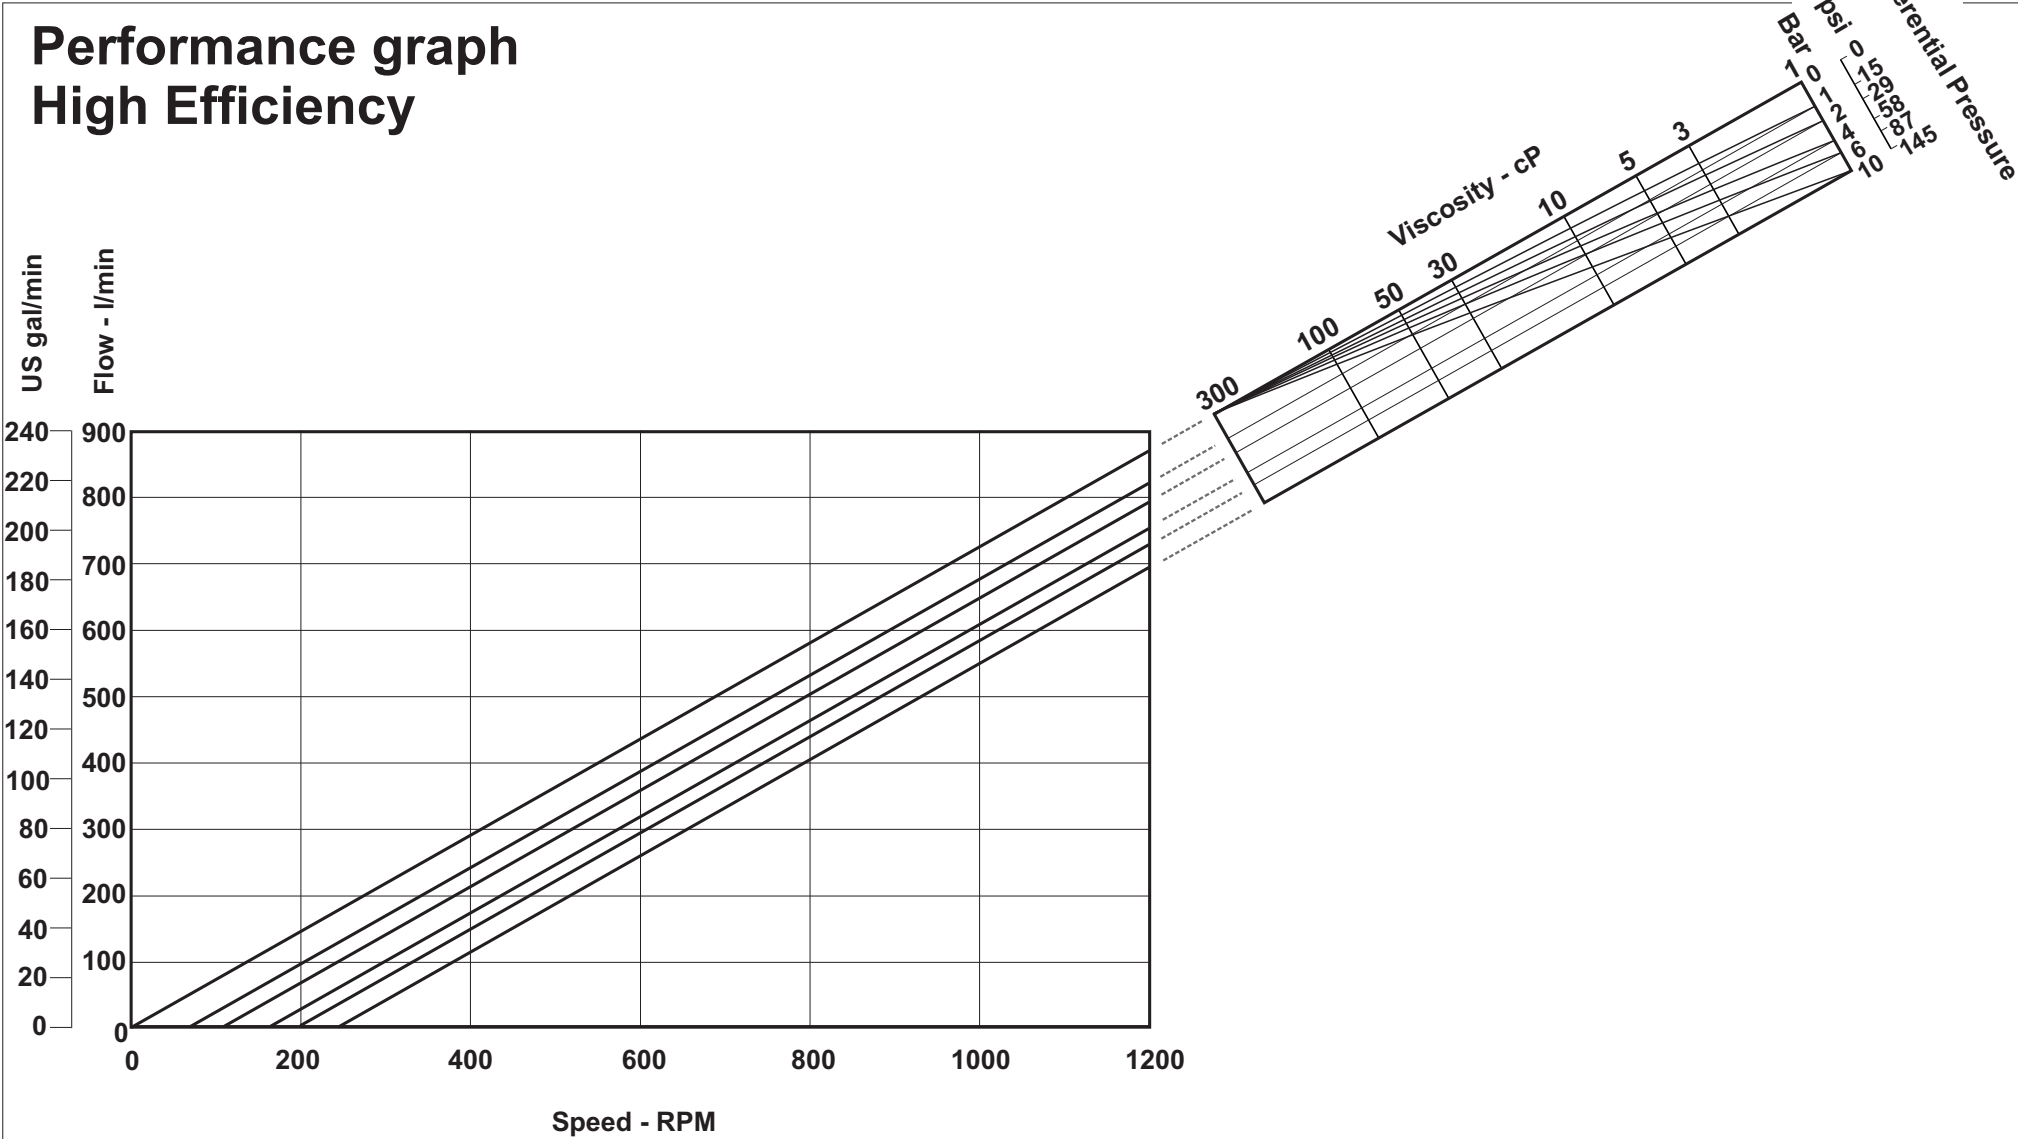


Performance graph Multi-Duty

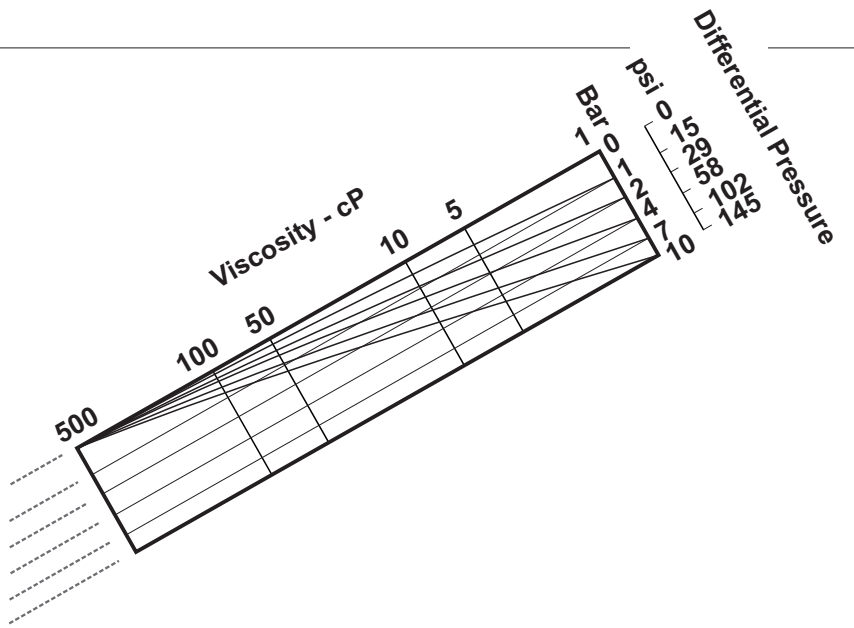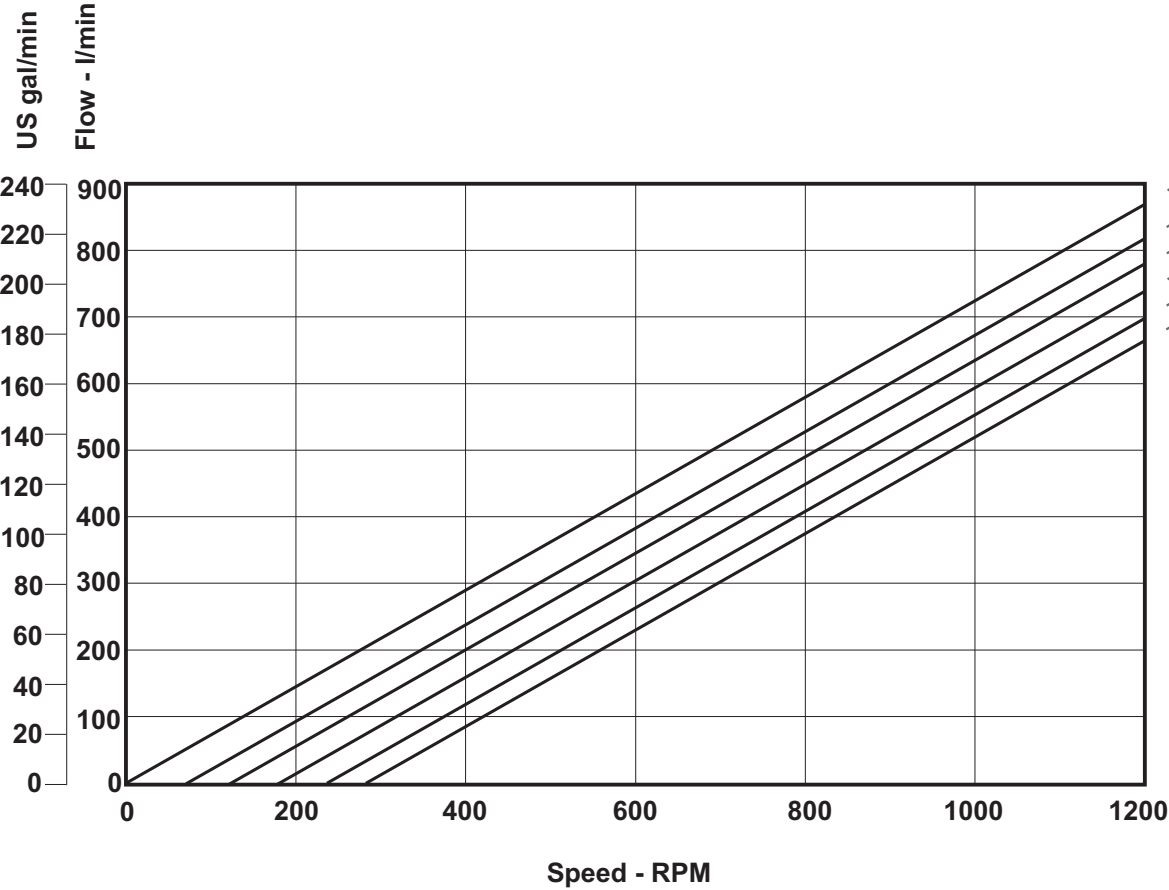

Performance graph High temperature 180°C

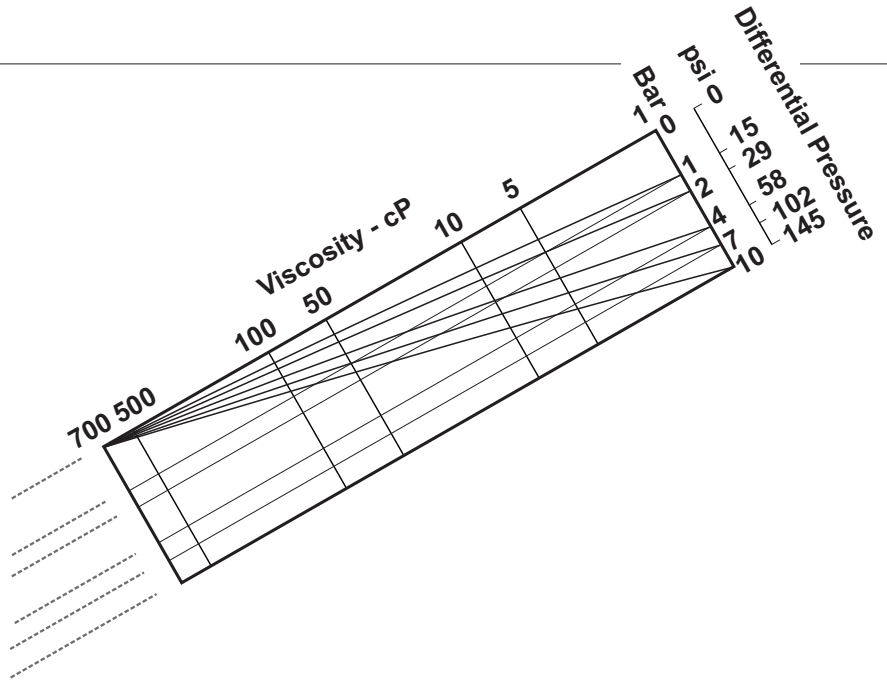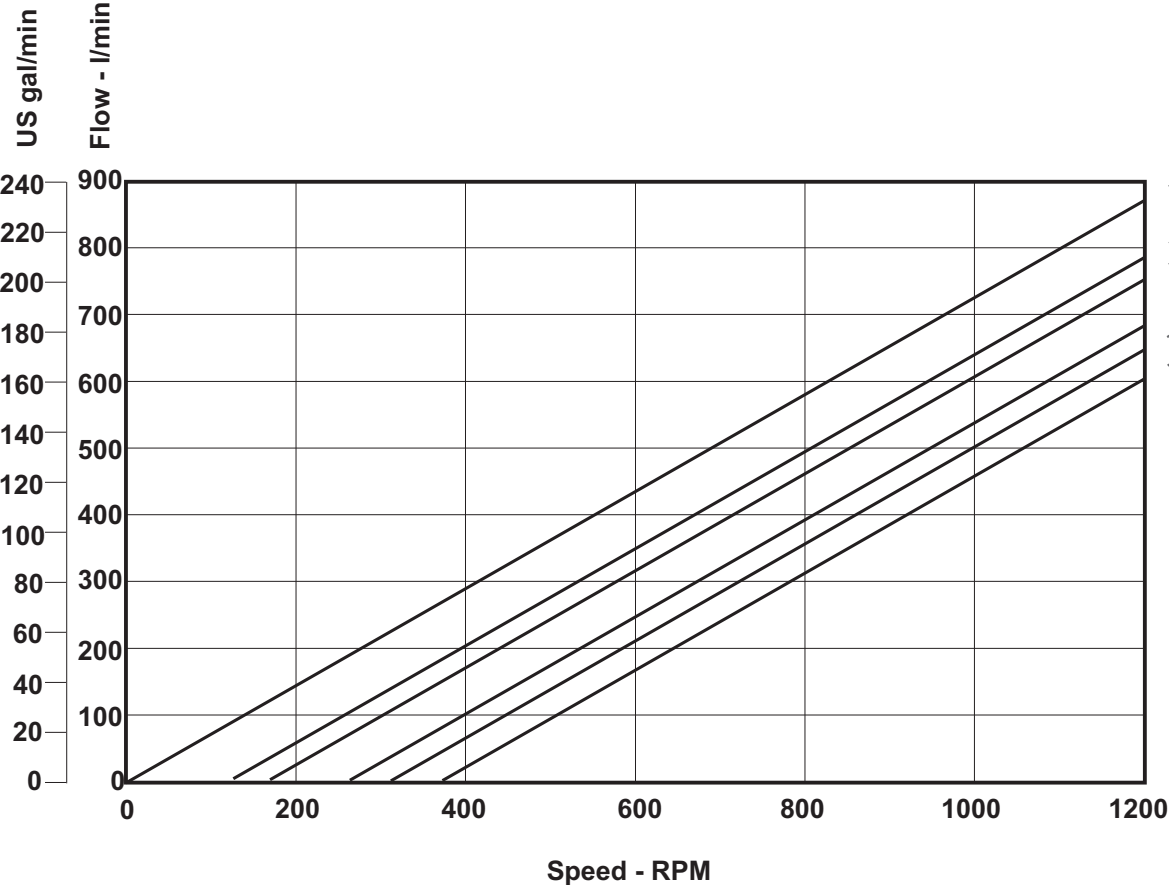

Power and N.P.S.H.R graph

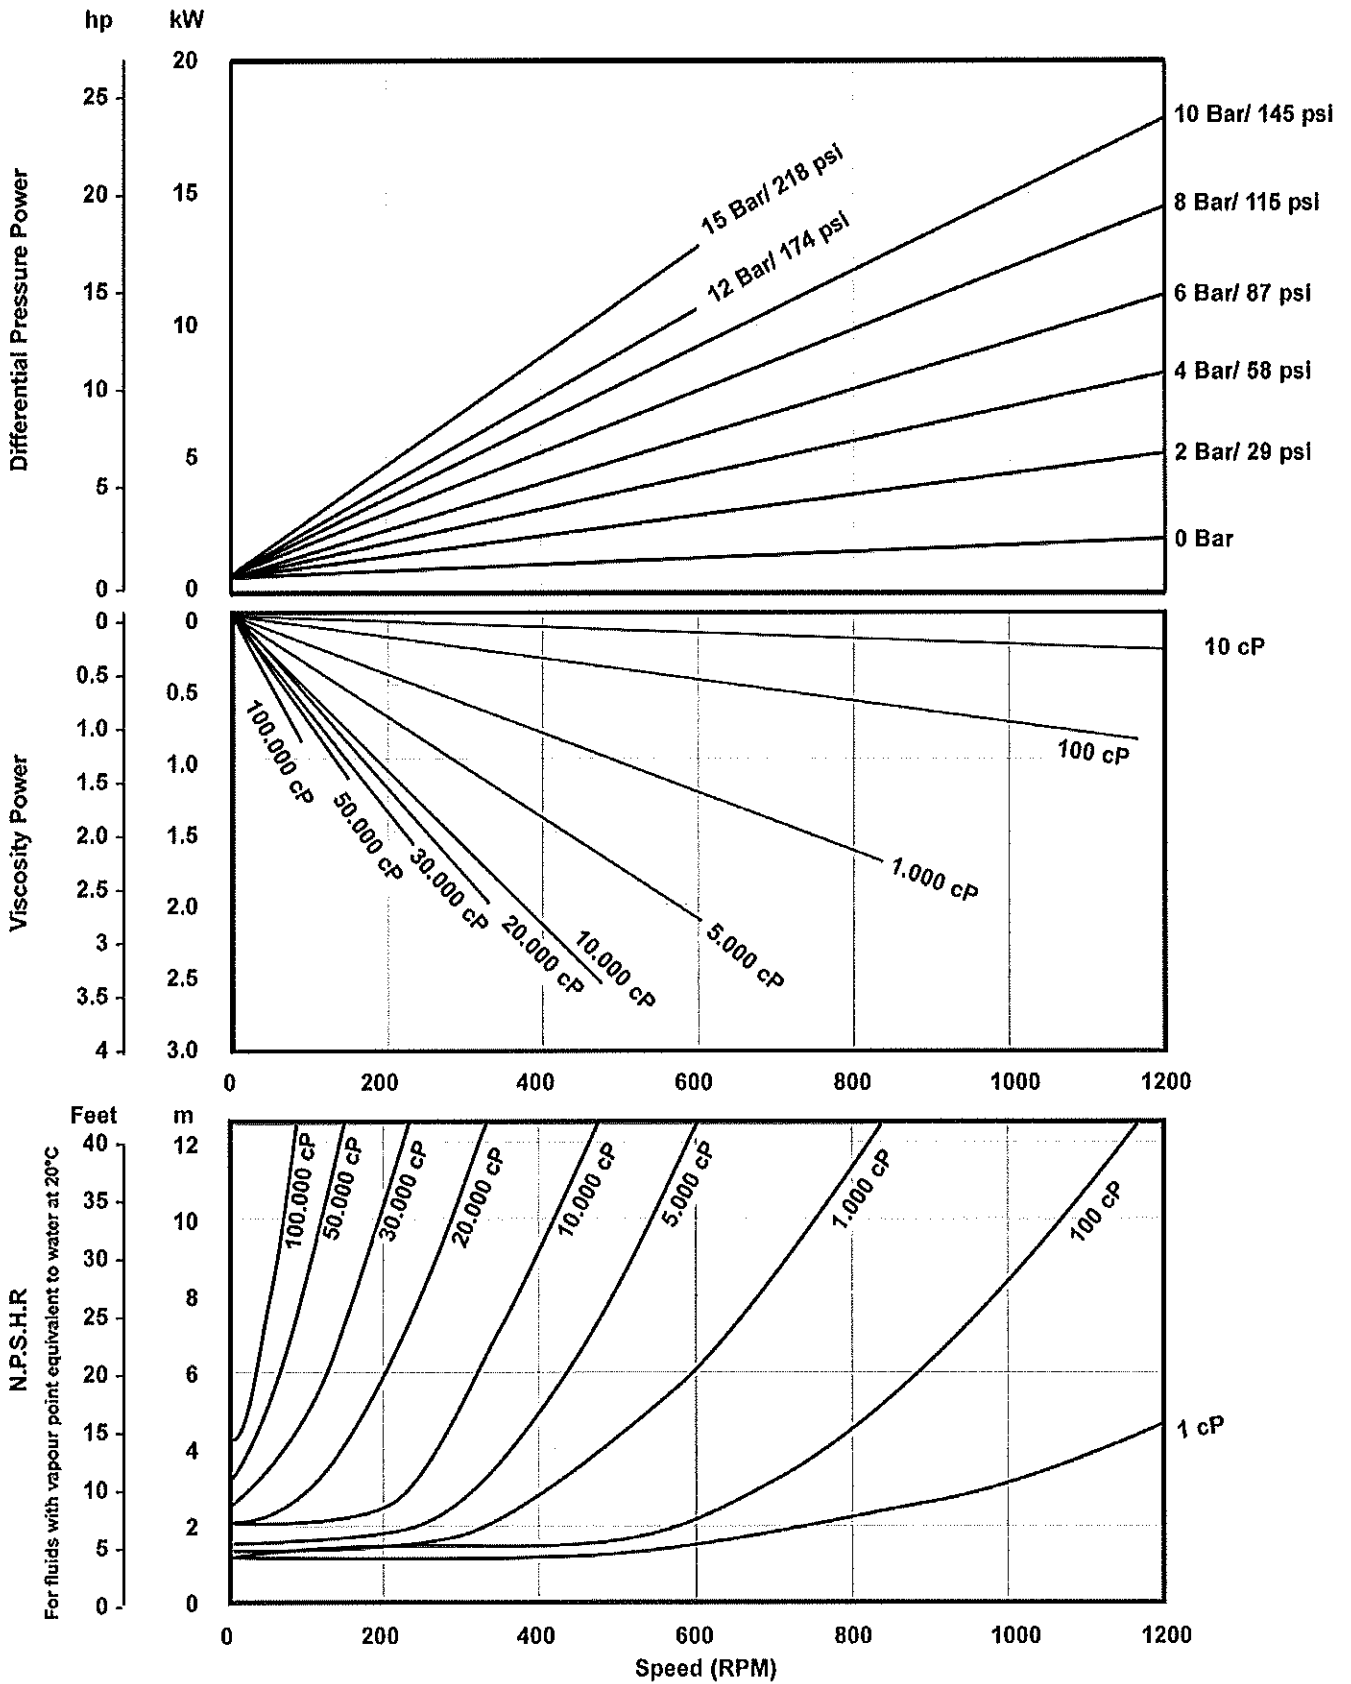


NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.


Max. shaft input torque - 250 Nm/ 2210 inlb

DW4/073/15_600

Performance graph Multi-Duty

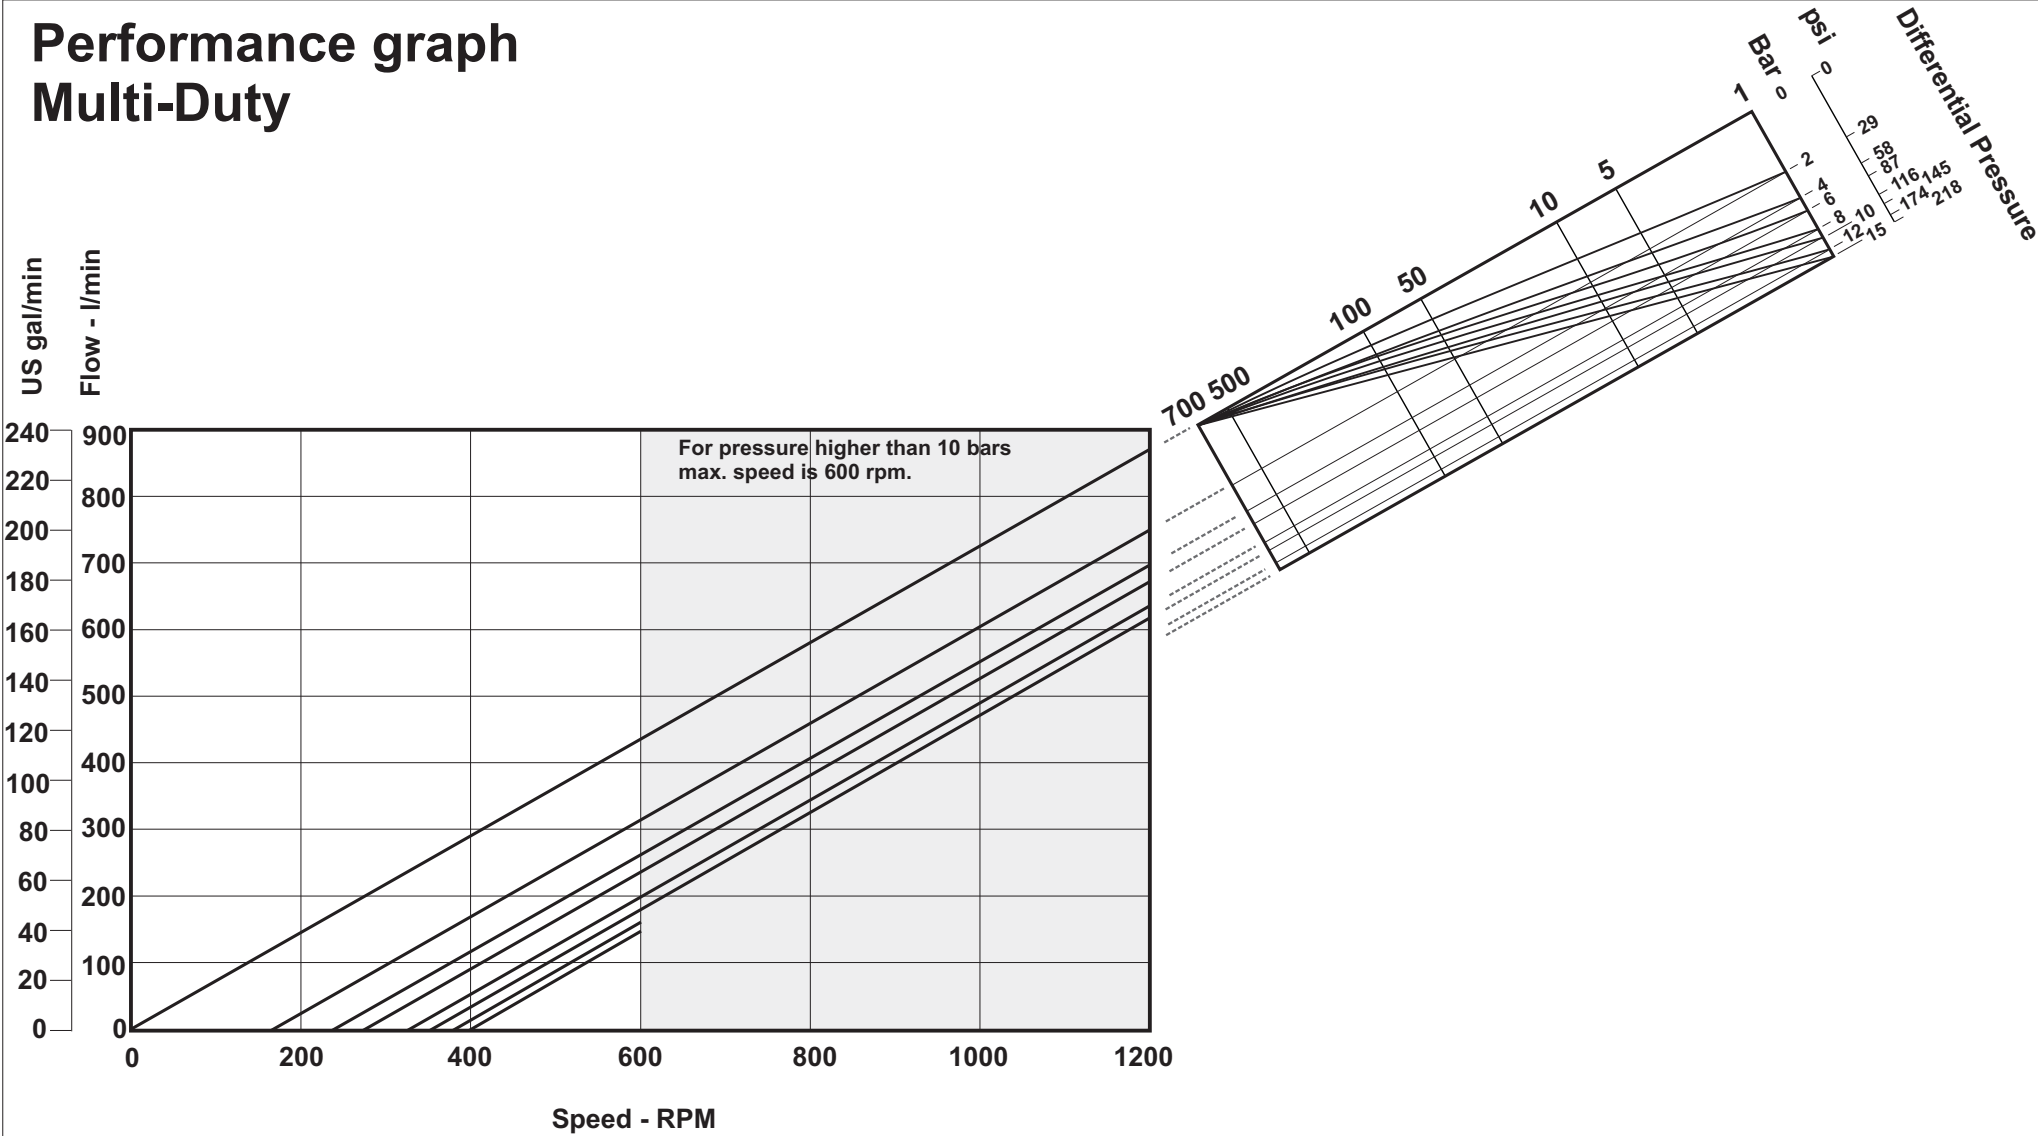

Power and N.P.S.H.R graph


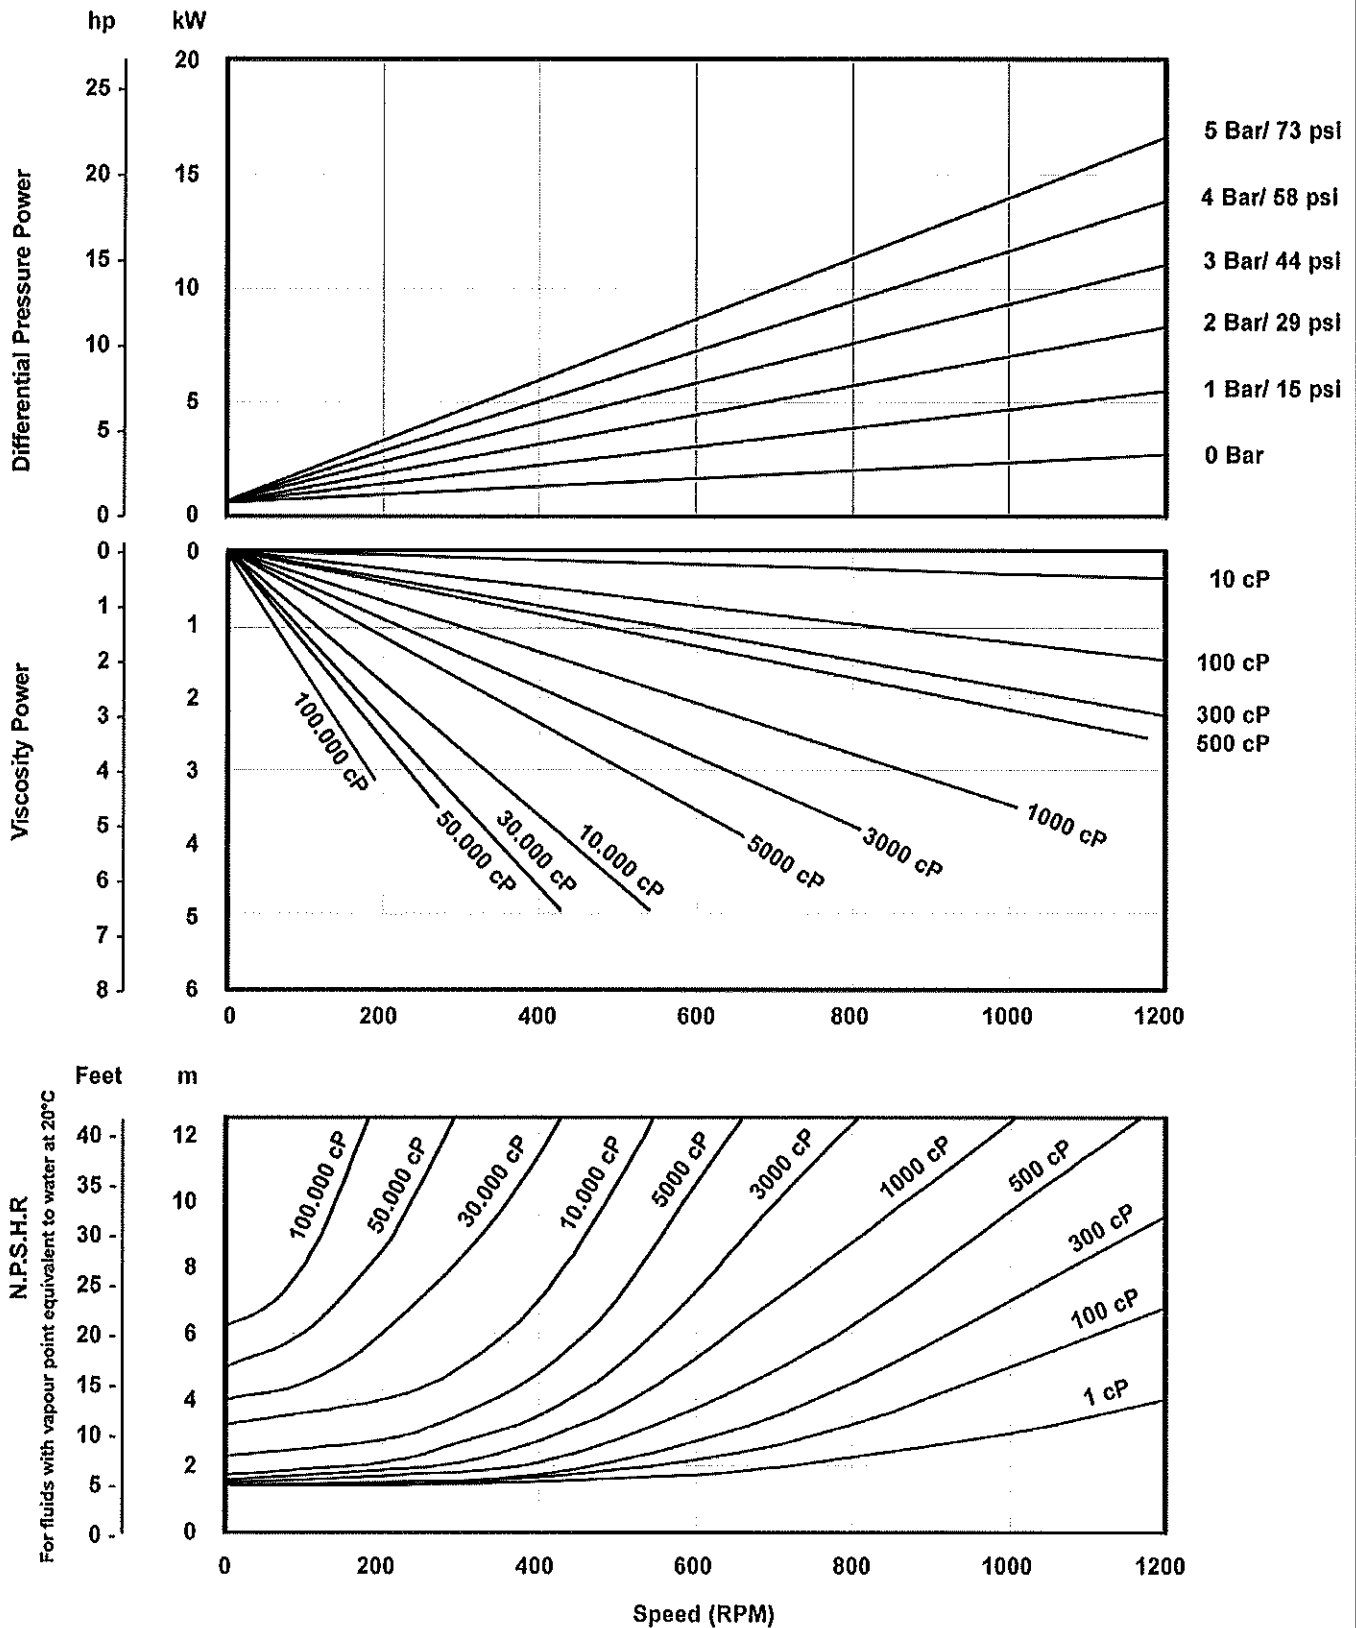


NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.


Max. shaft input torque - 250 Nm/ 2210 Inbl

DW4/125/5

Performance graph Multi Duty

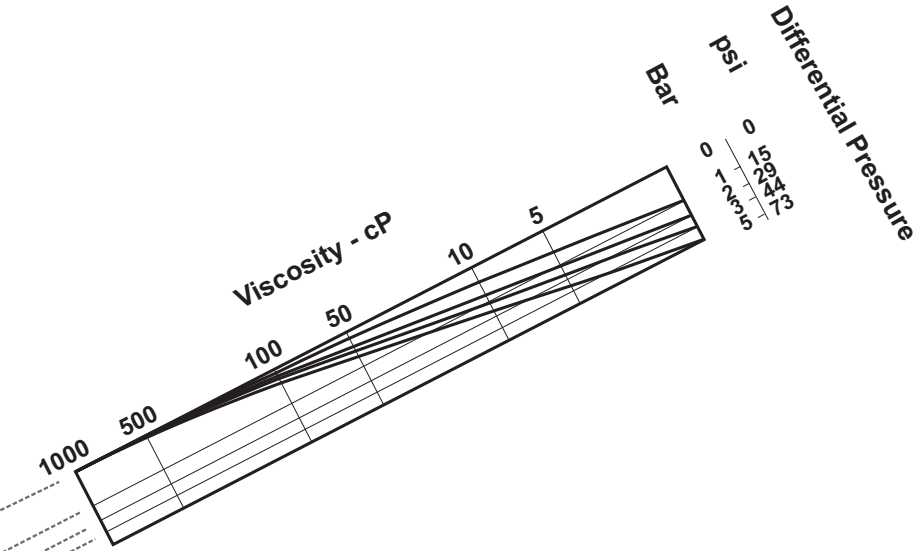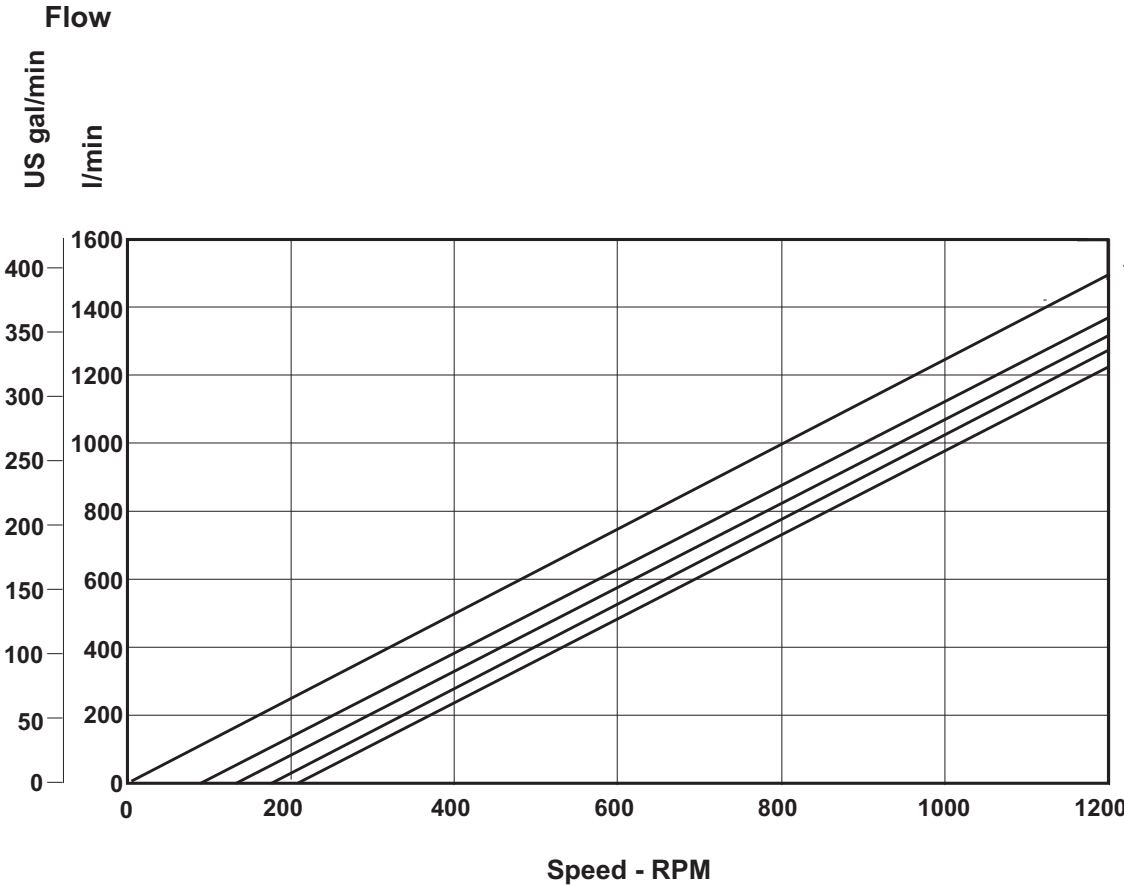

Power and N.P.S.H.R graph

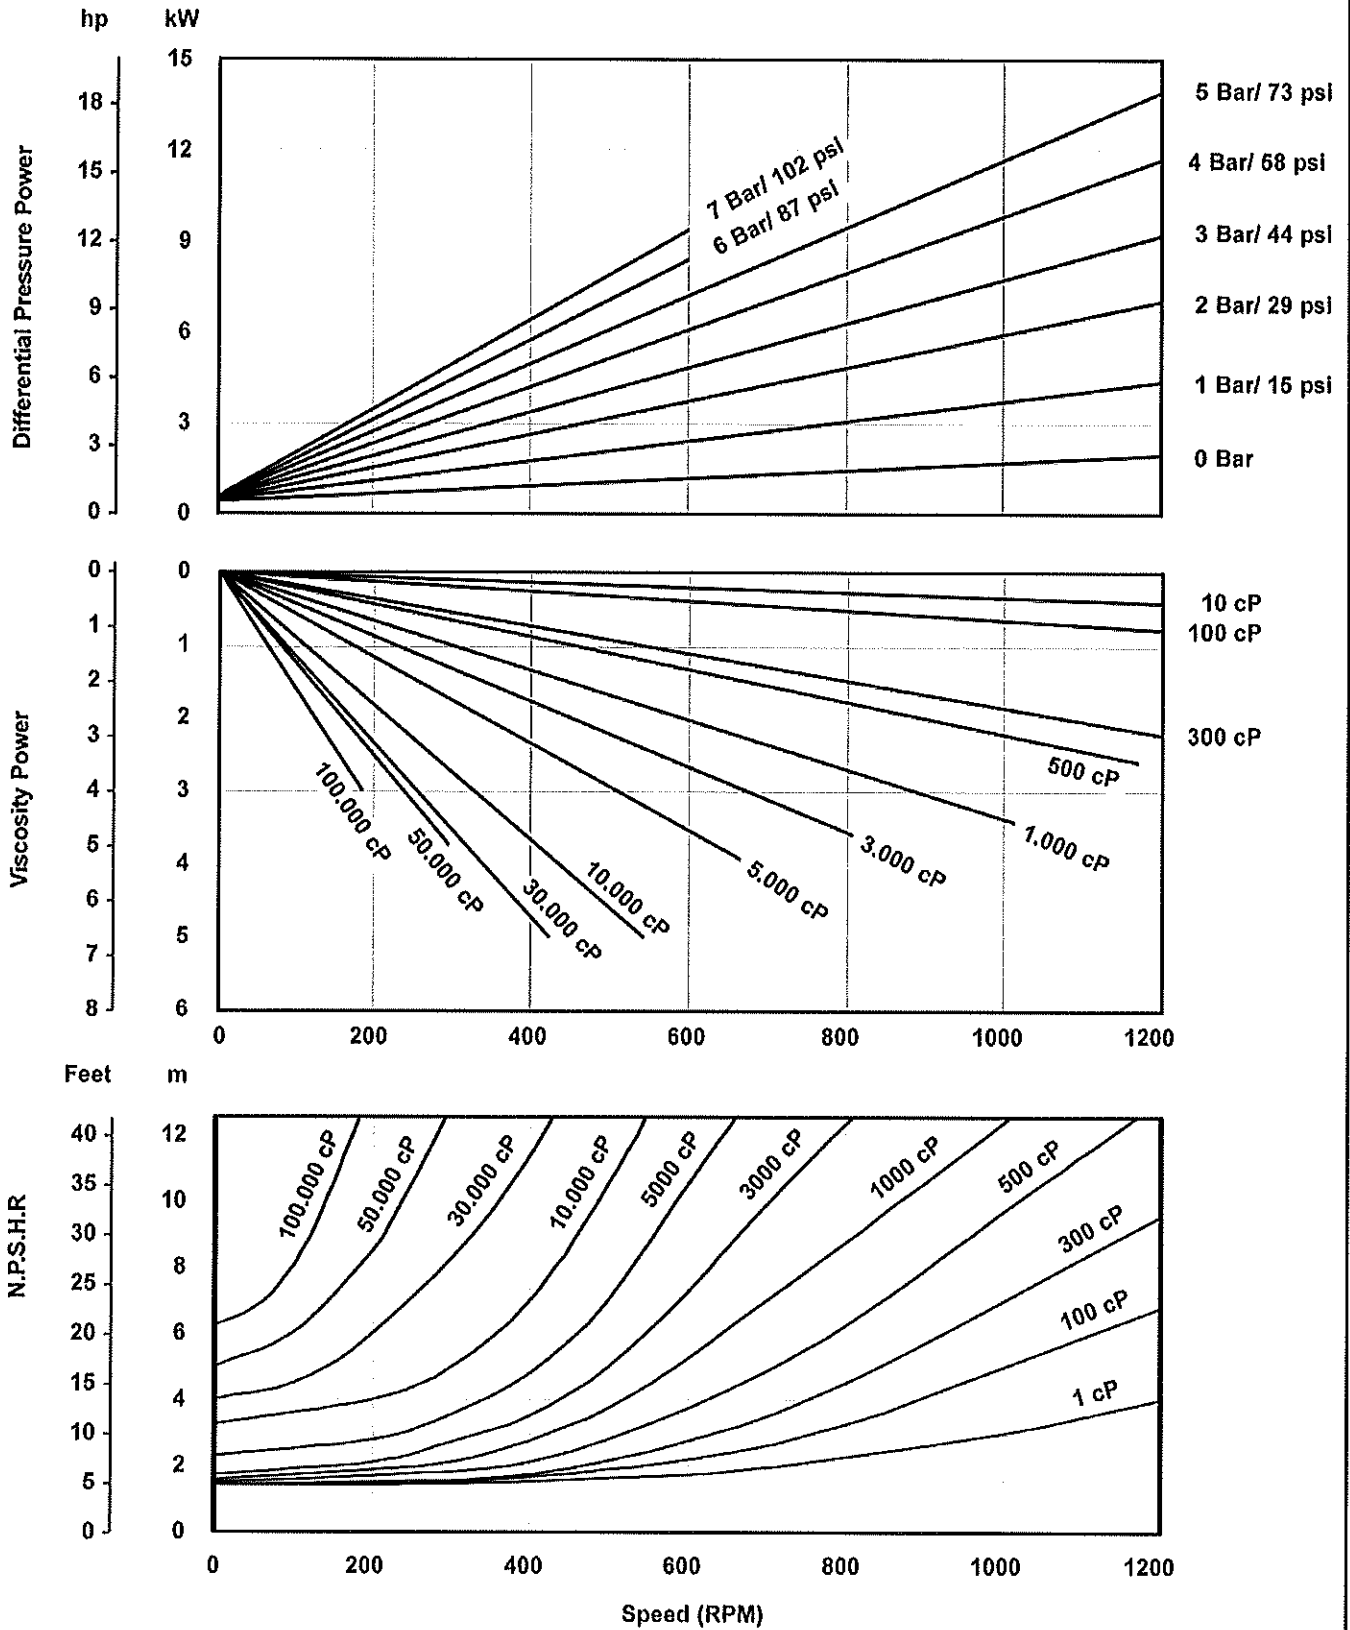

Max. shaft input torque - 250 Nm/ 2210 inlb

DW4/125/7_600

Performance graph Multi Duty

