
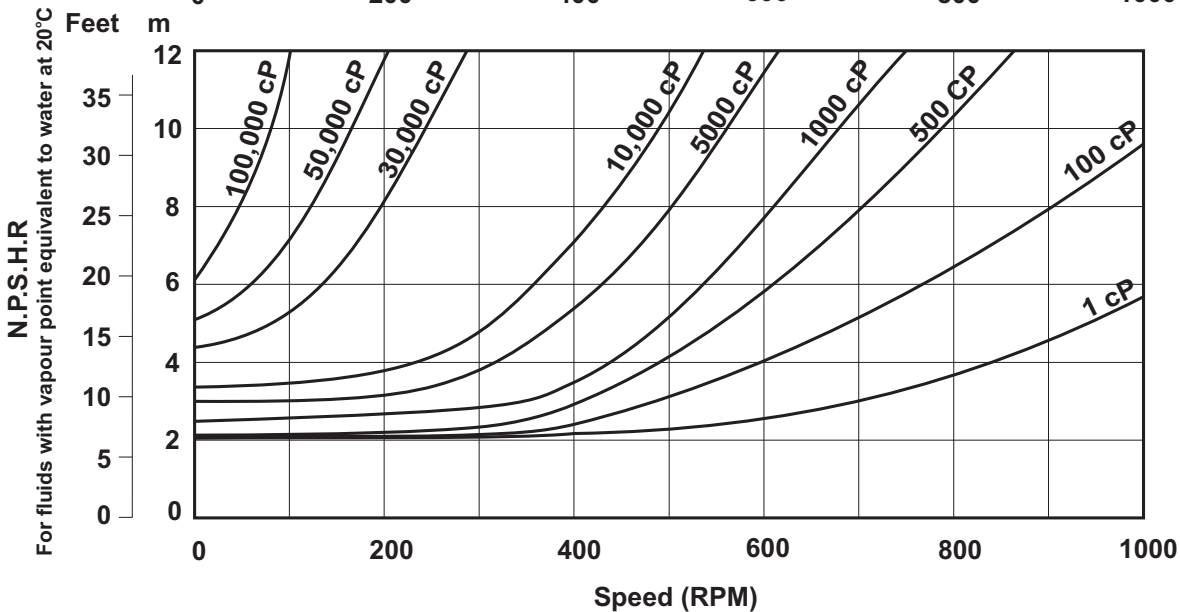


# Power and N.P.S.H.R graph

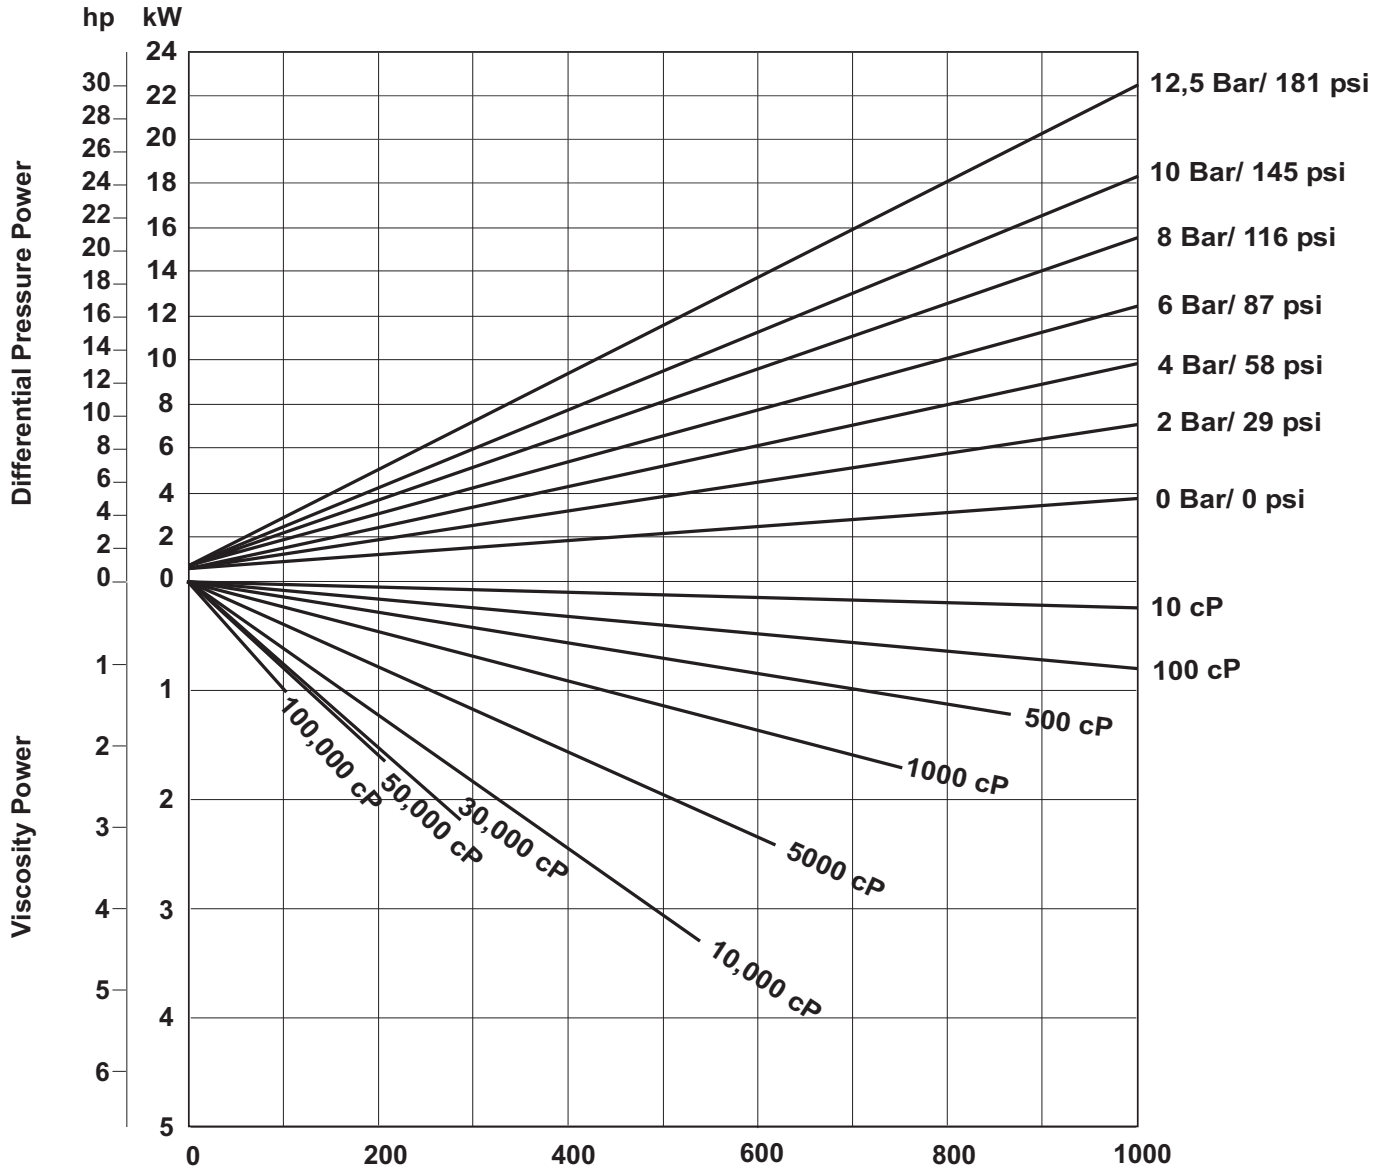


NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.


Max. shaft input torque - 700 Nm/ 6200 inlb

DW5/080/12.5



# Performance graph High Efficiency

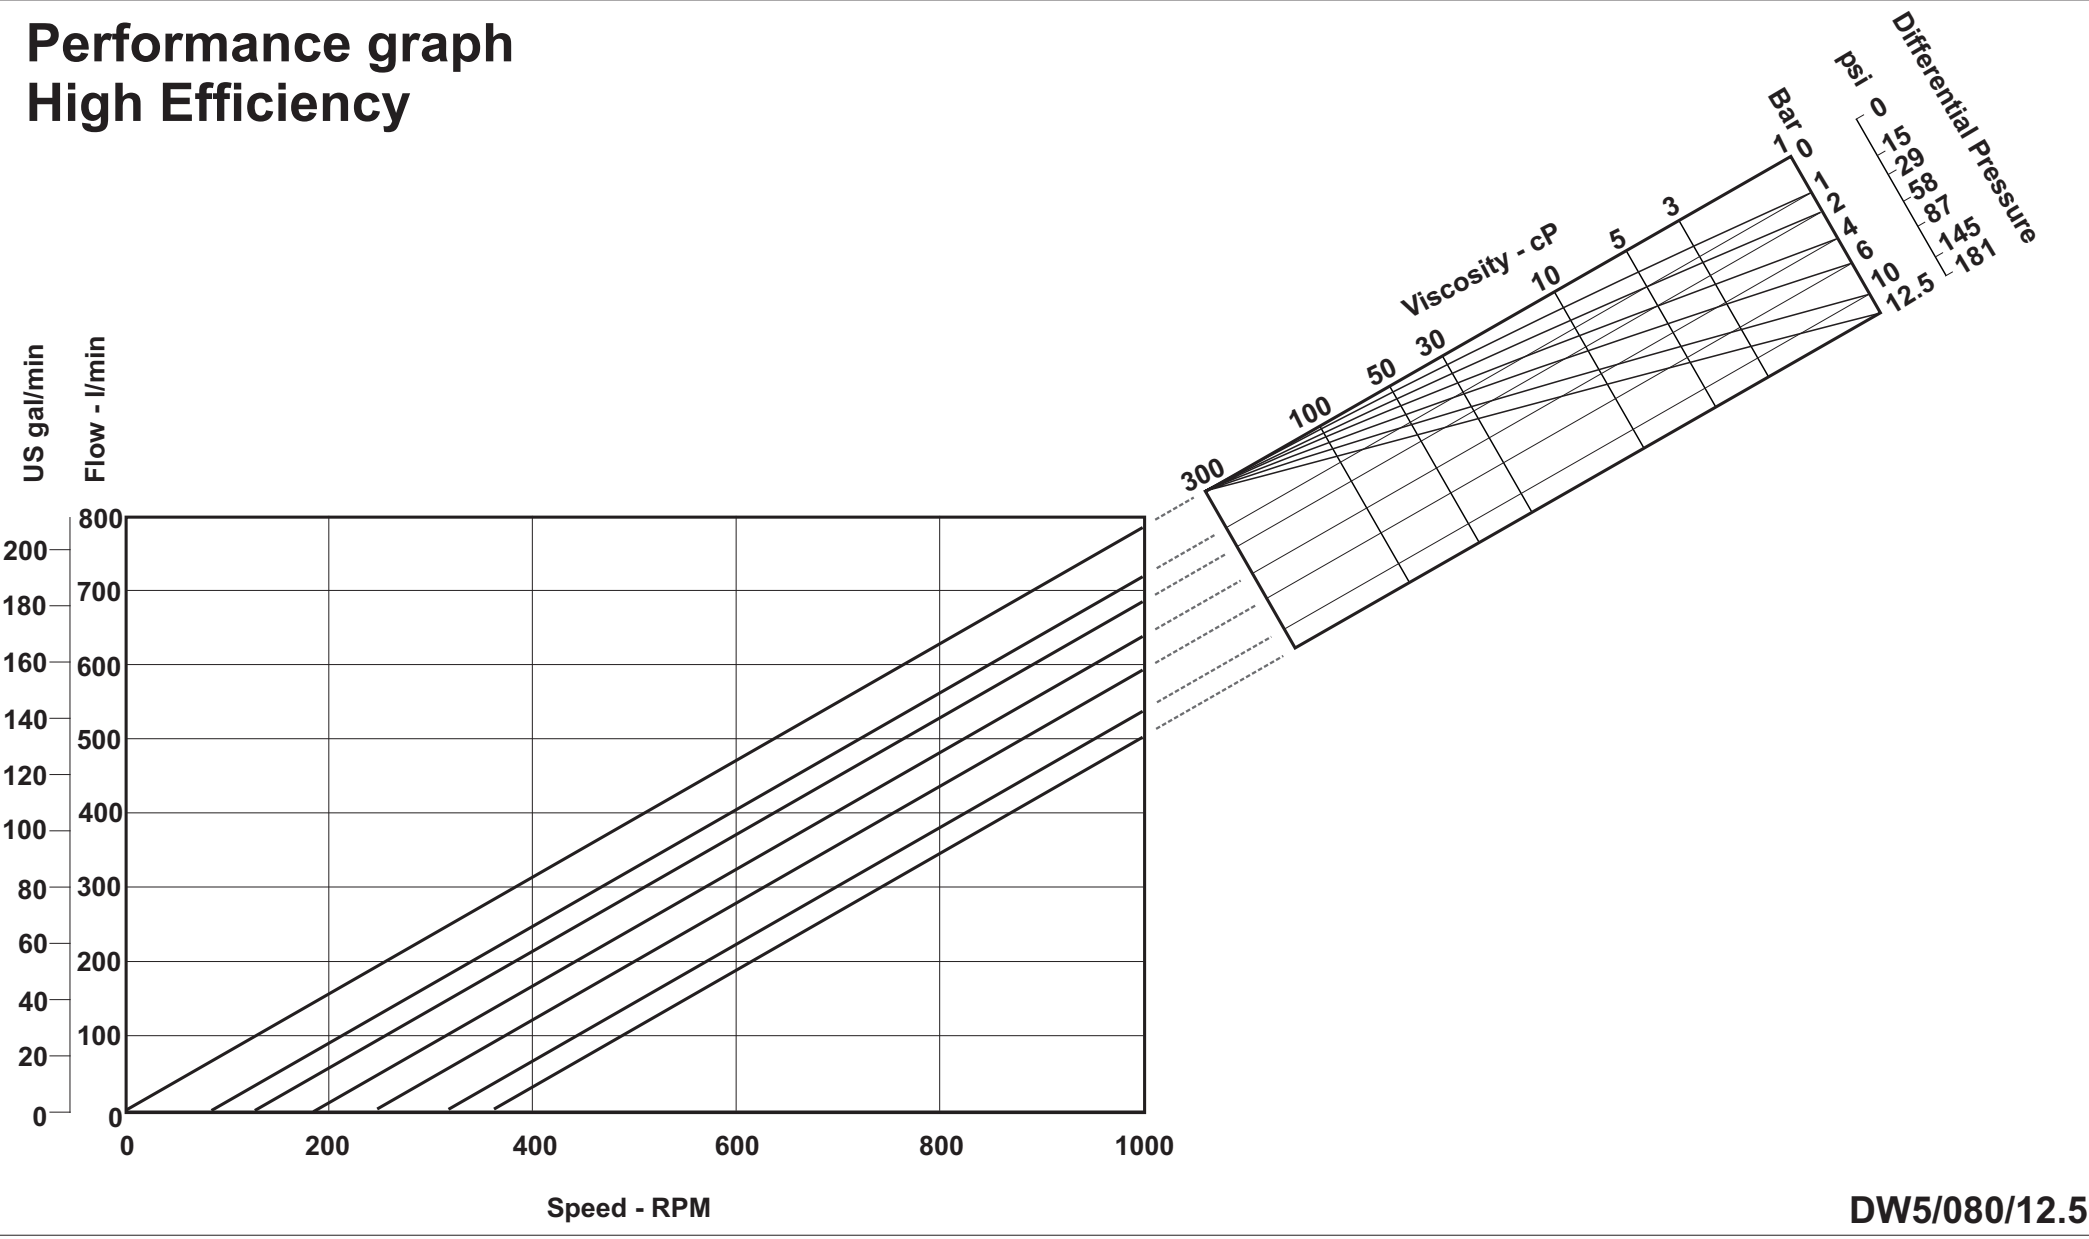

# Performance graph Multi-Duty

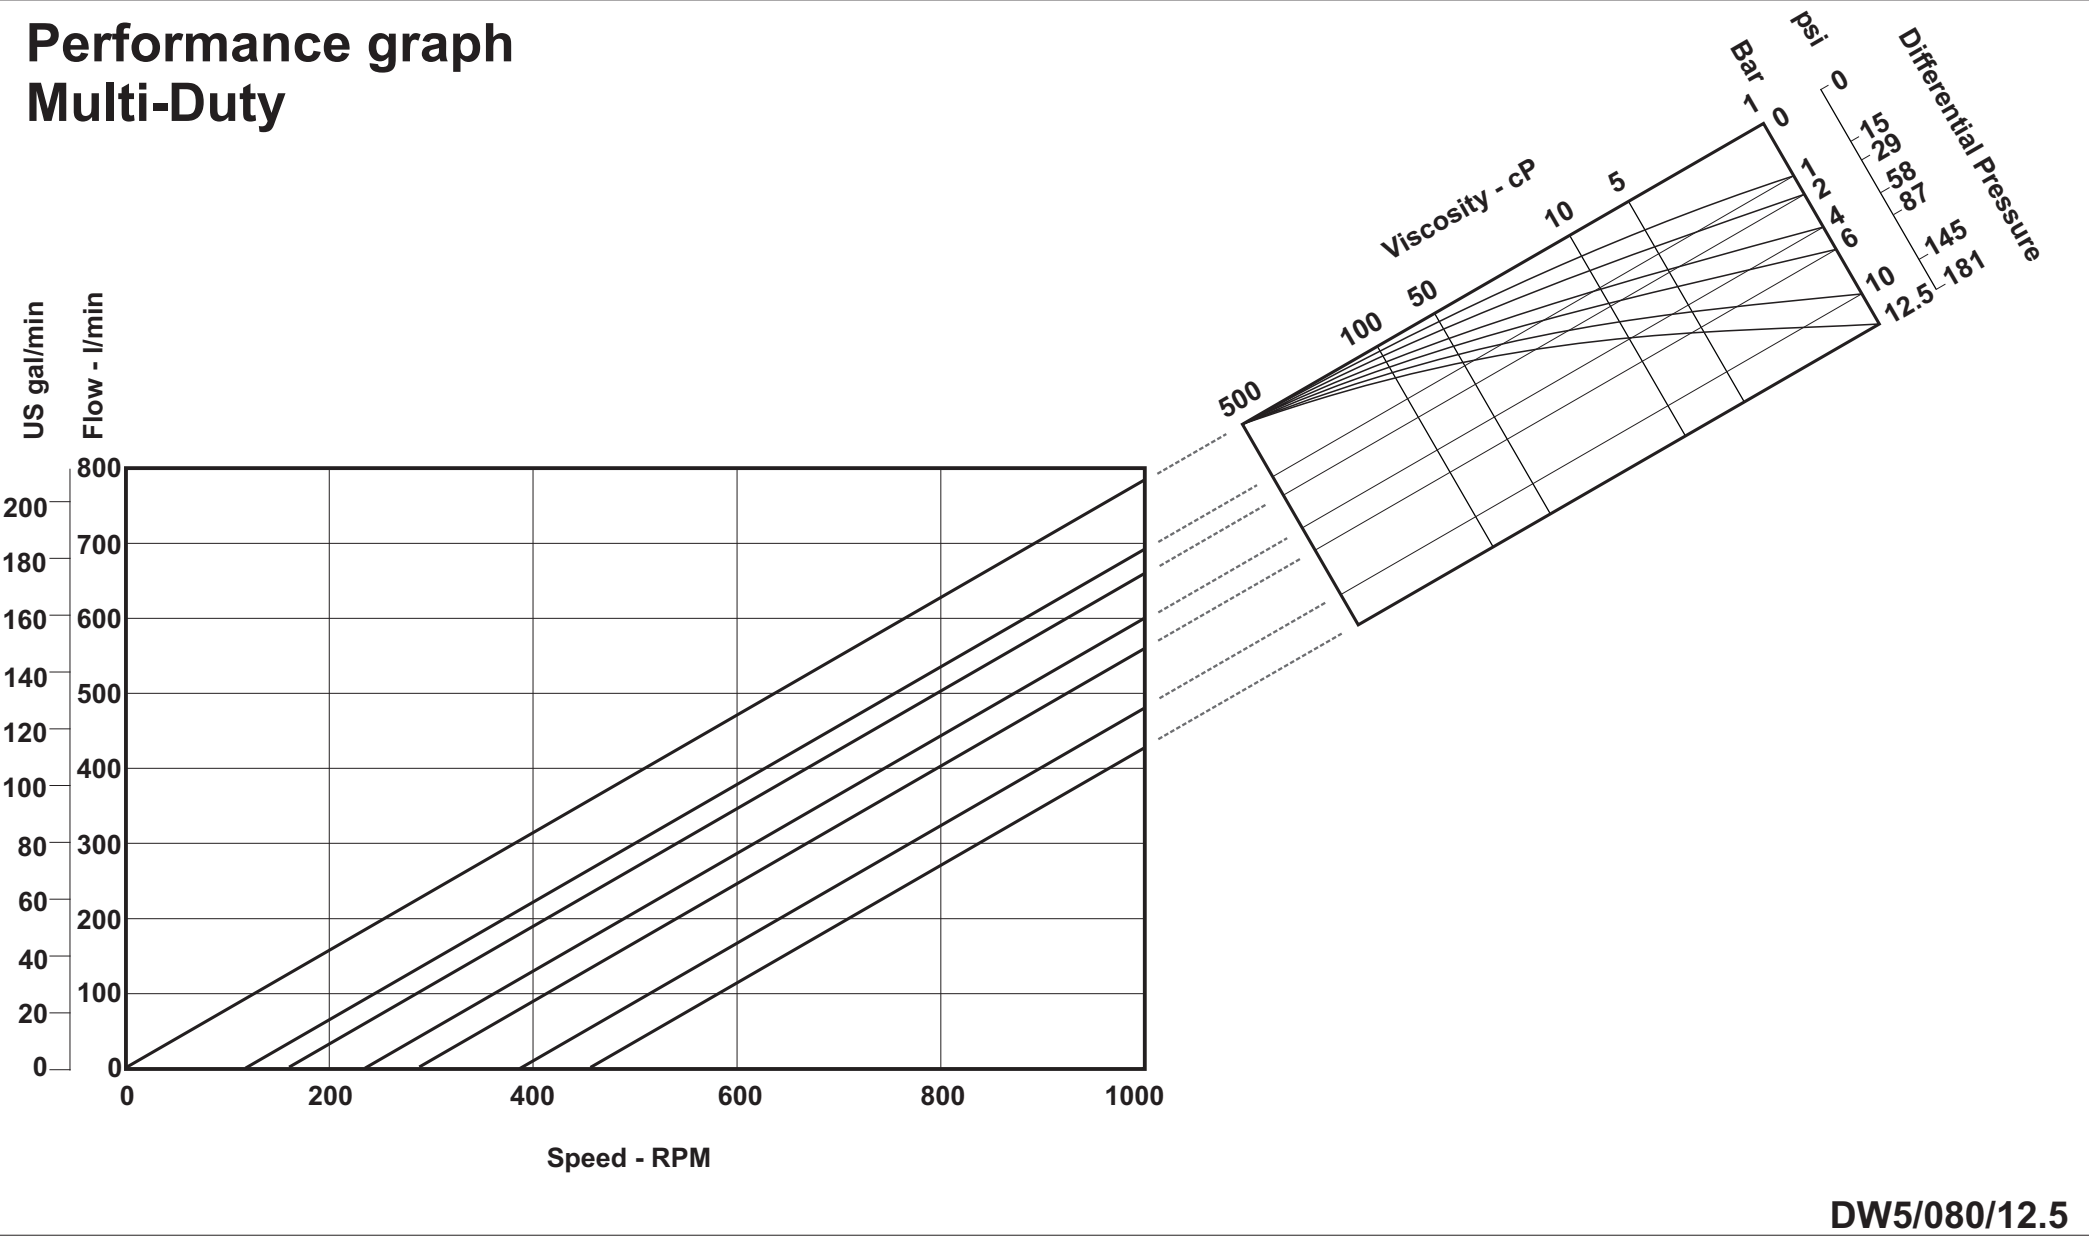


# Power and N.P.S.H.R graph

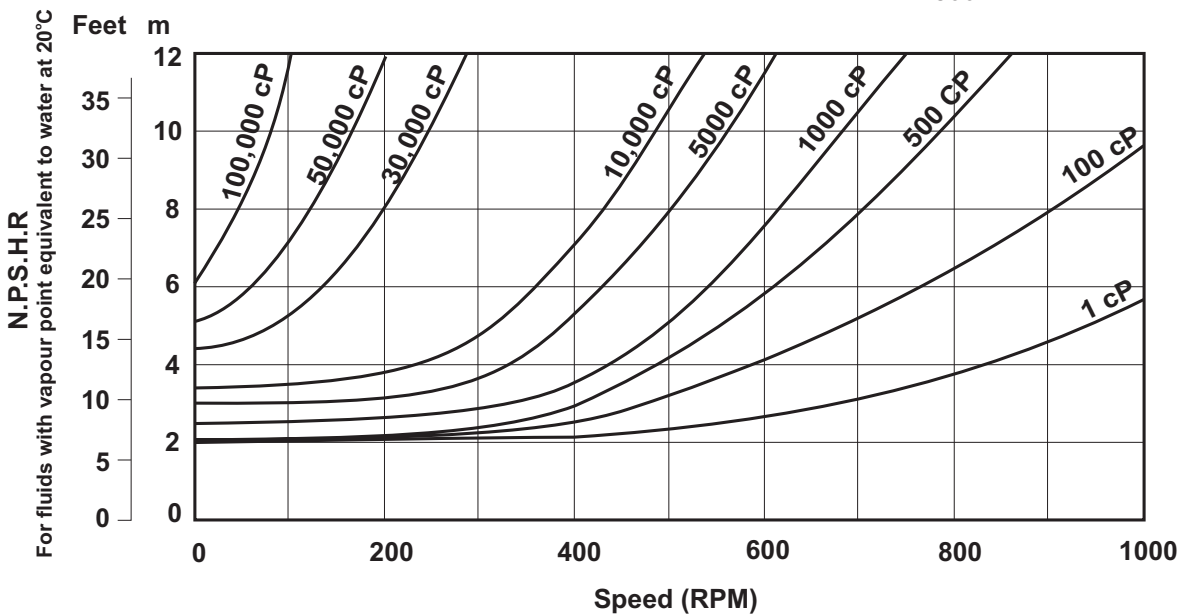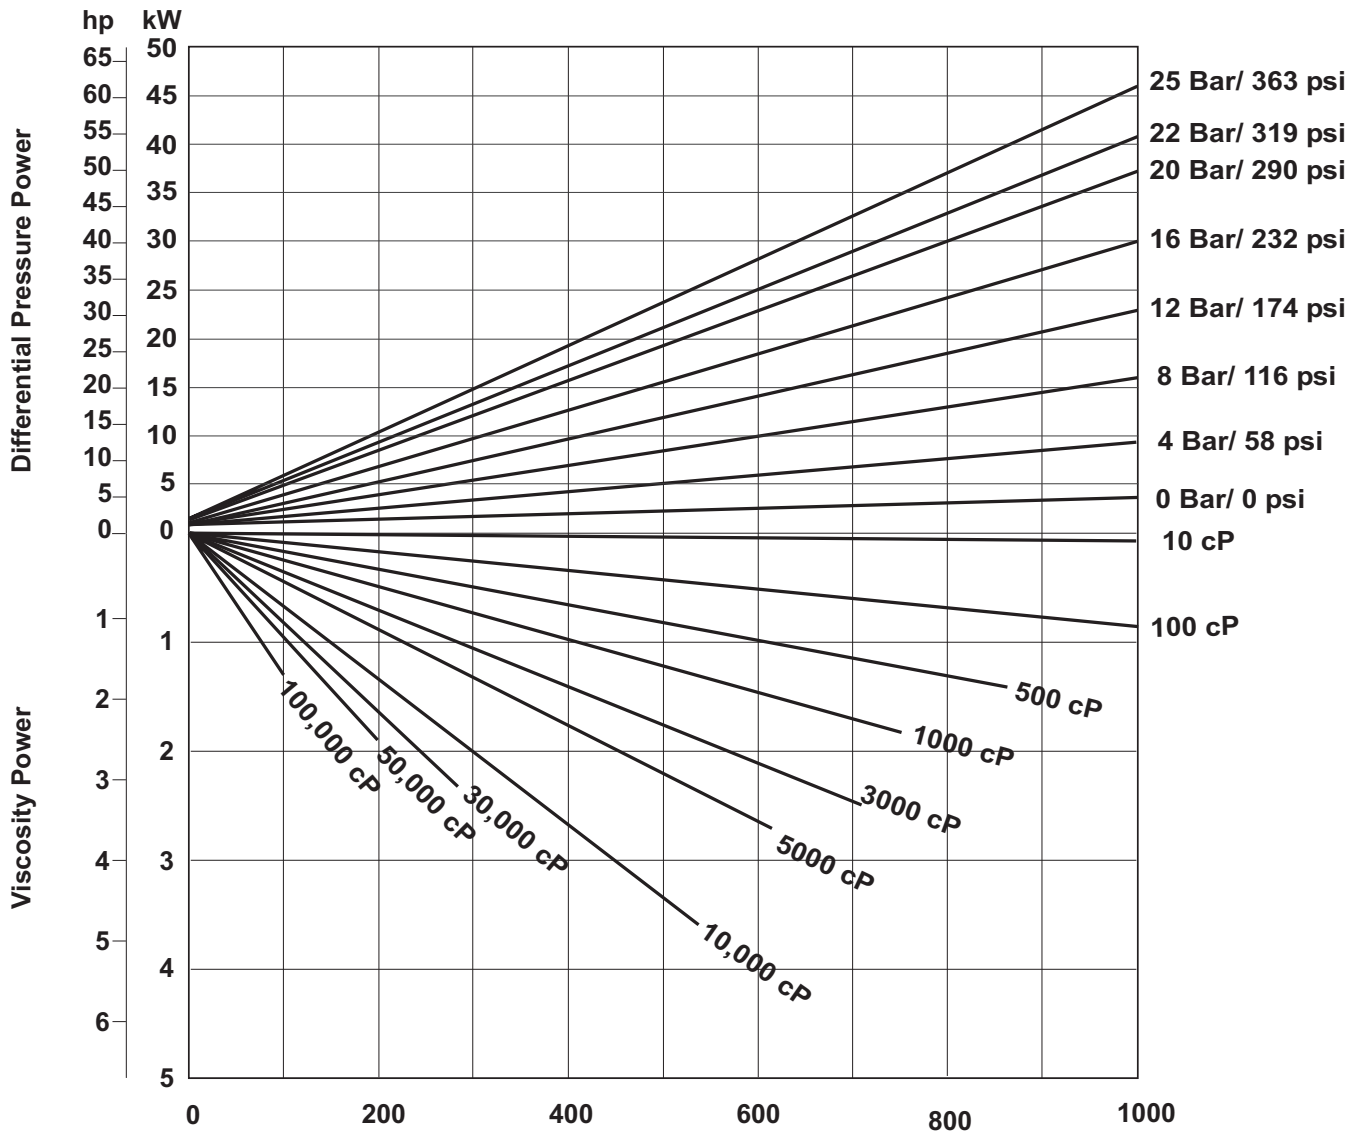


NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.

Max. shaft input torque - 700 Nm/ 6200 inlb


# Performance graph High Efficiency

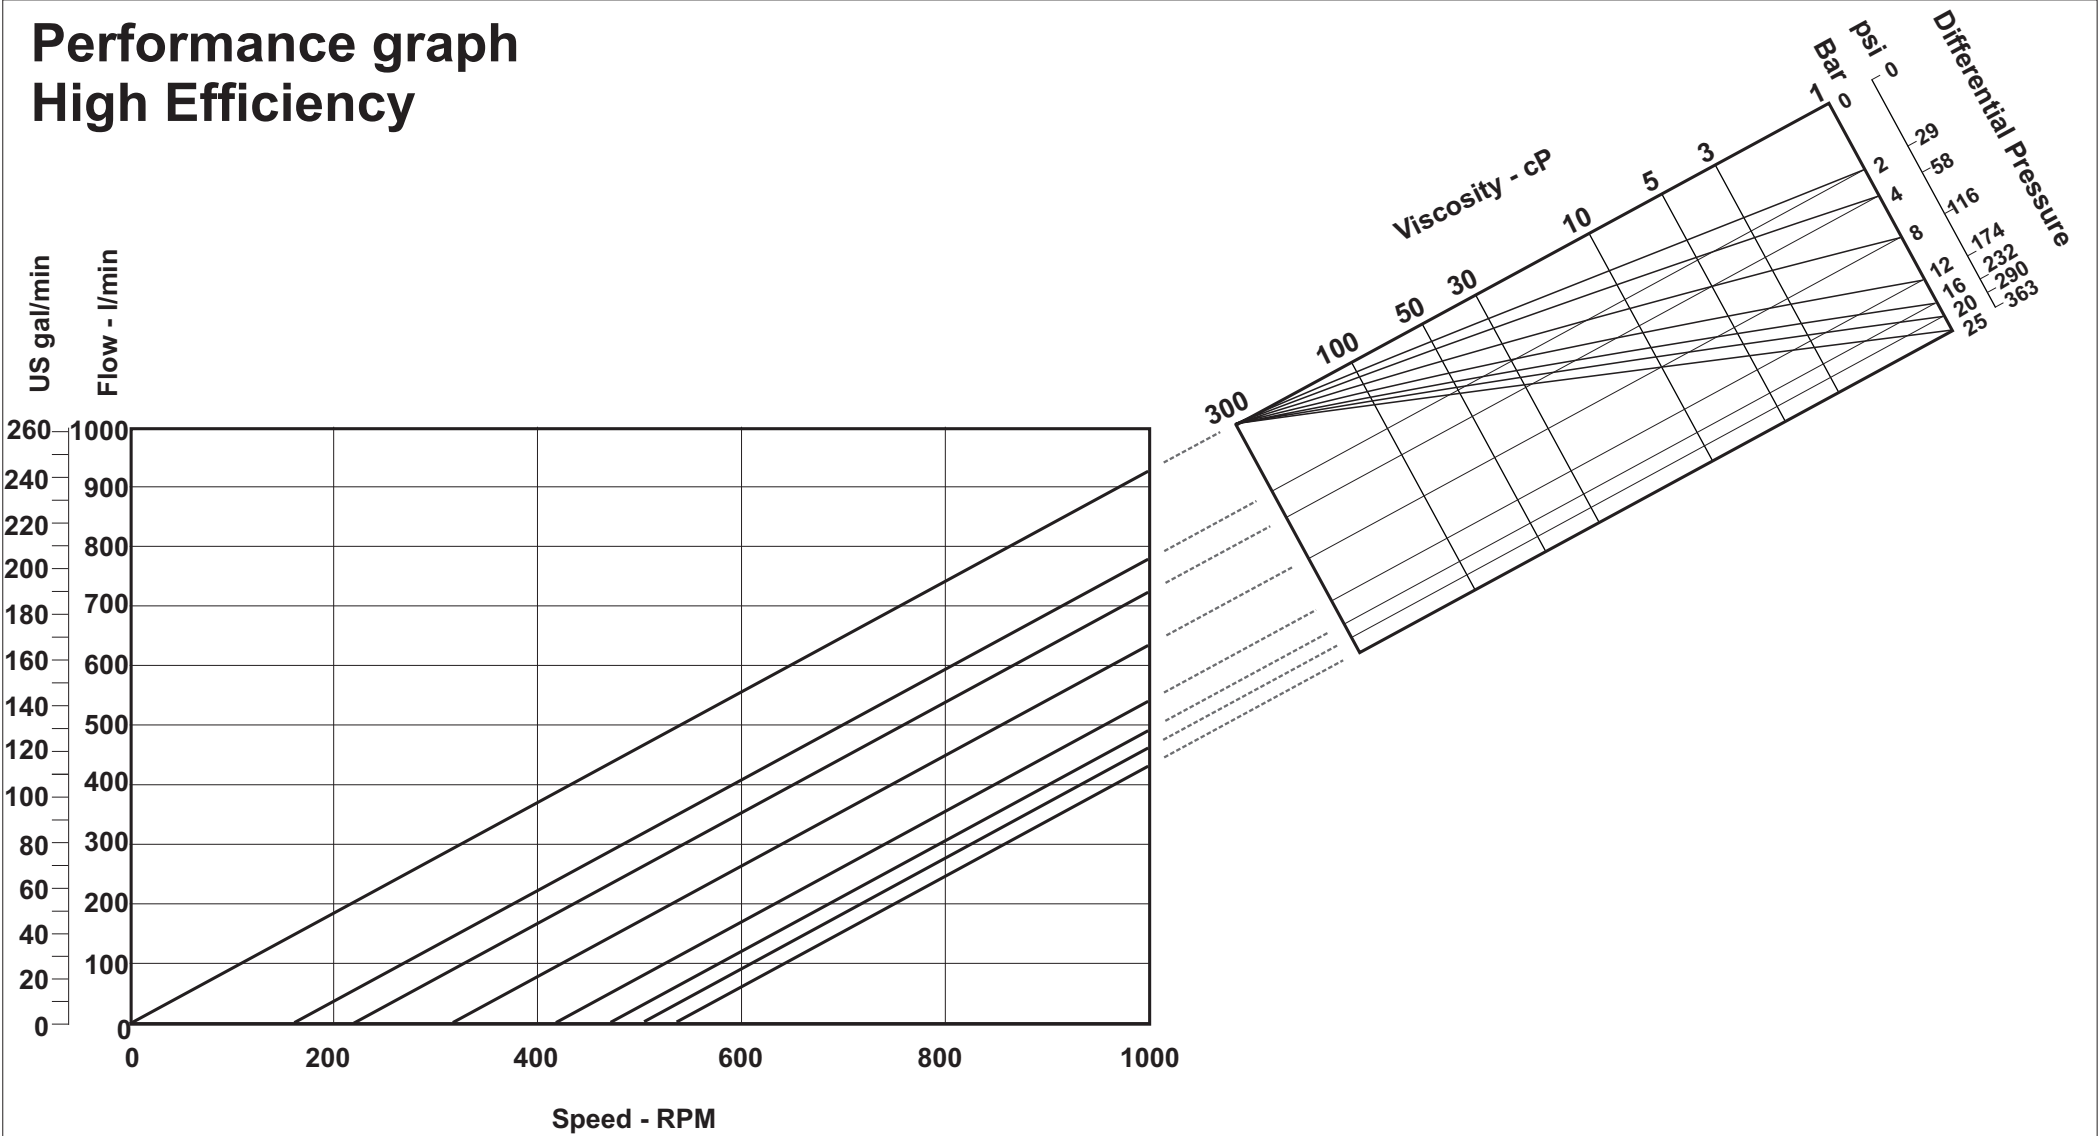



# Performance graph Multi-Duty

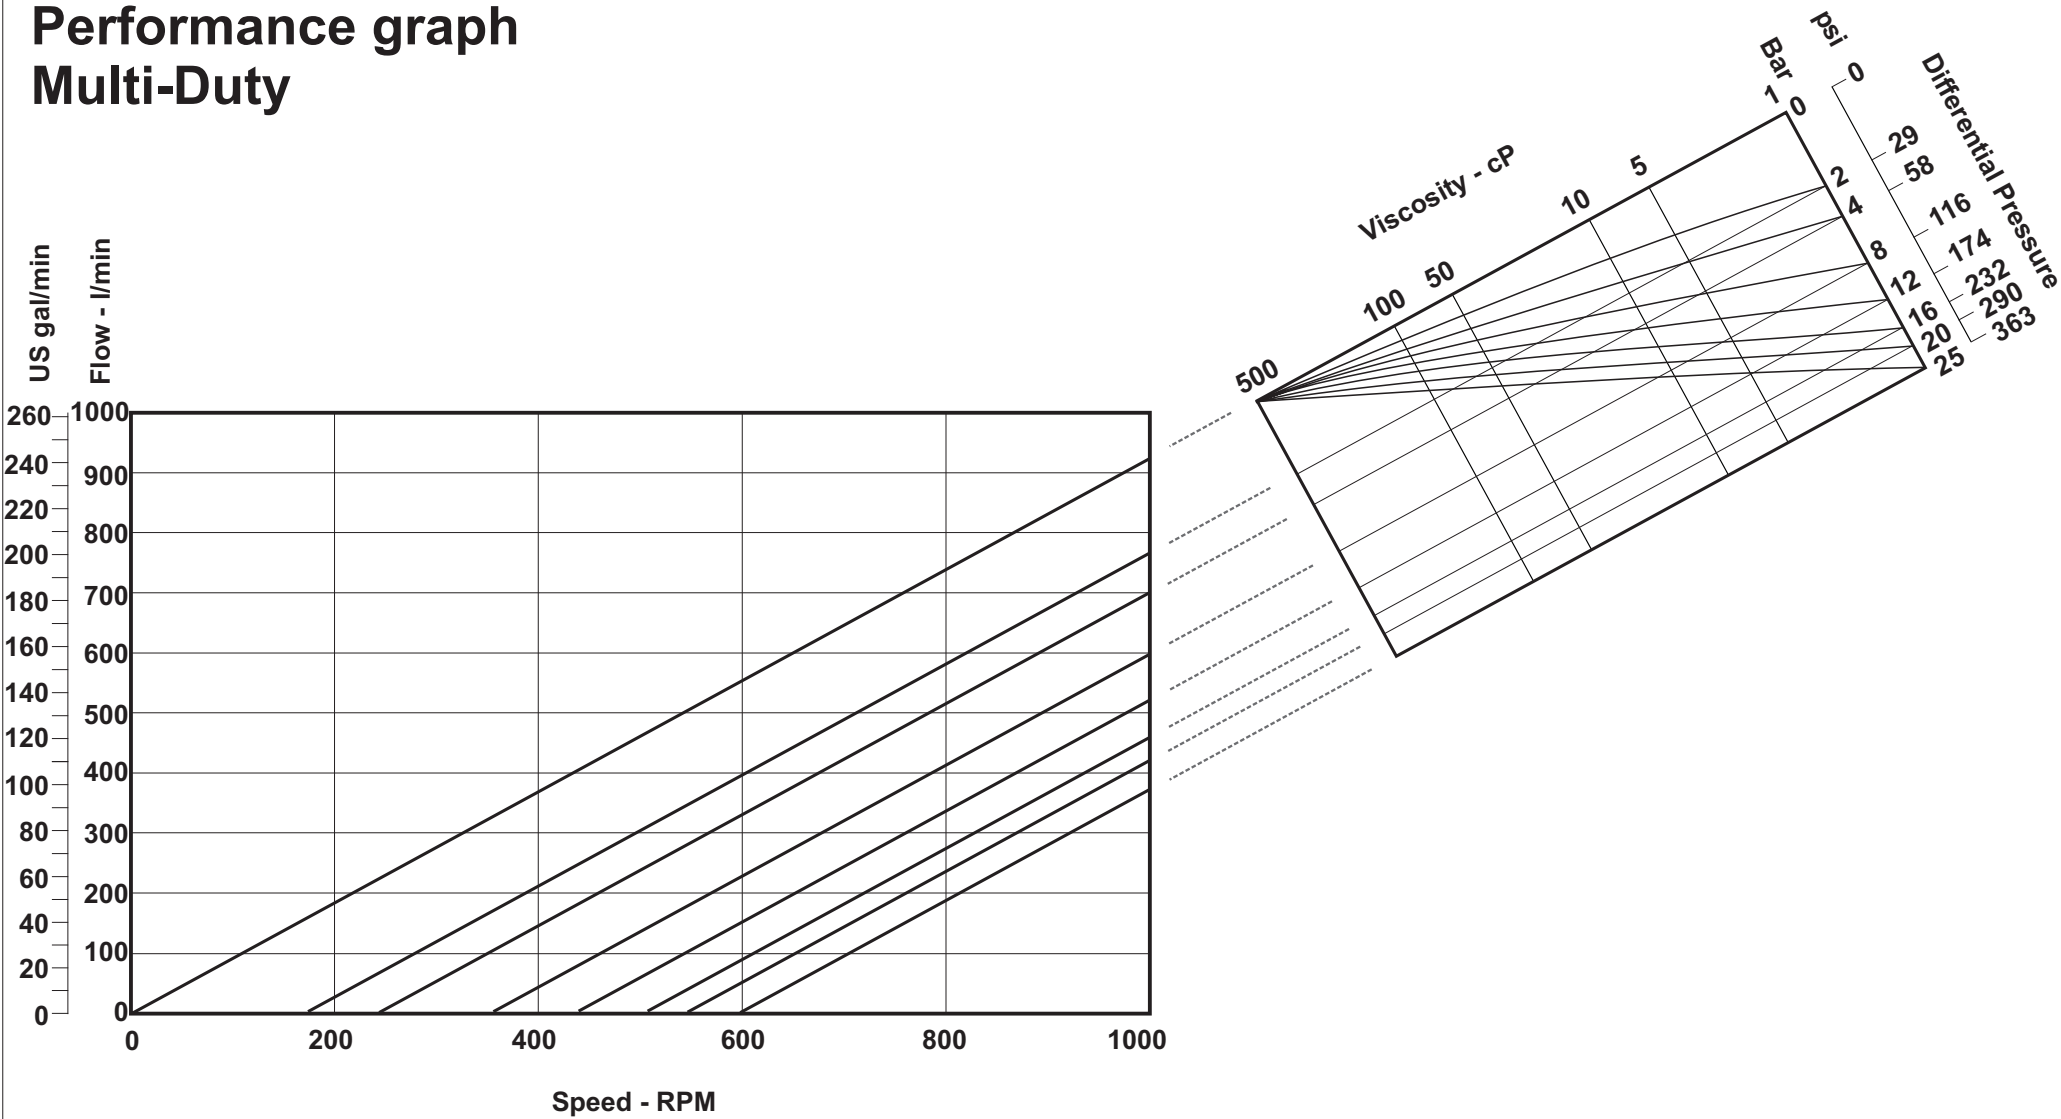

# Performance graph High temperature 180°C

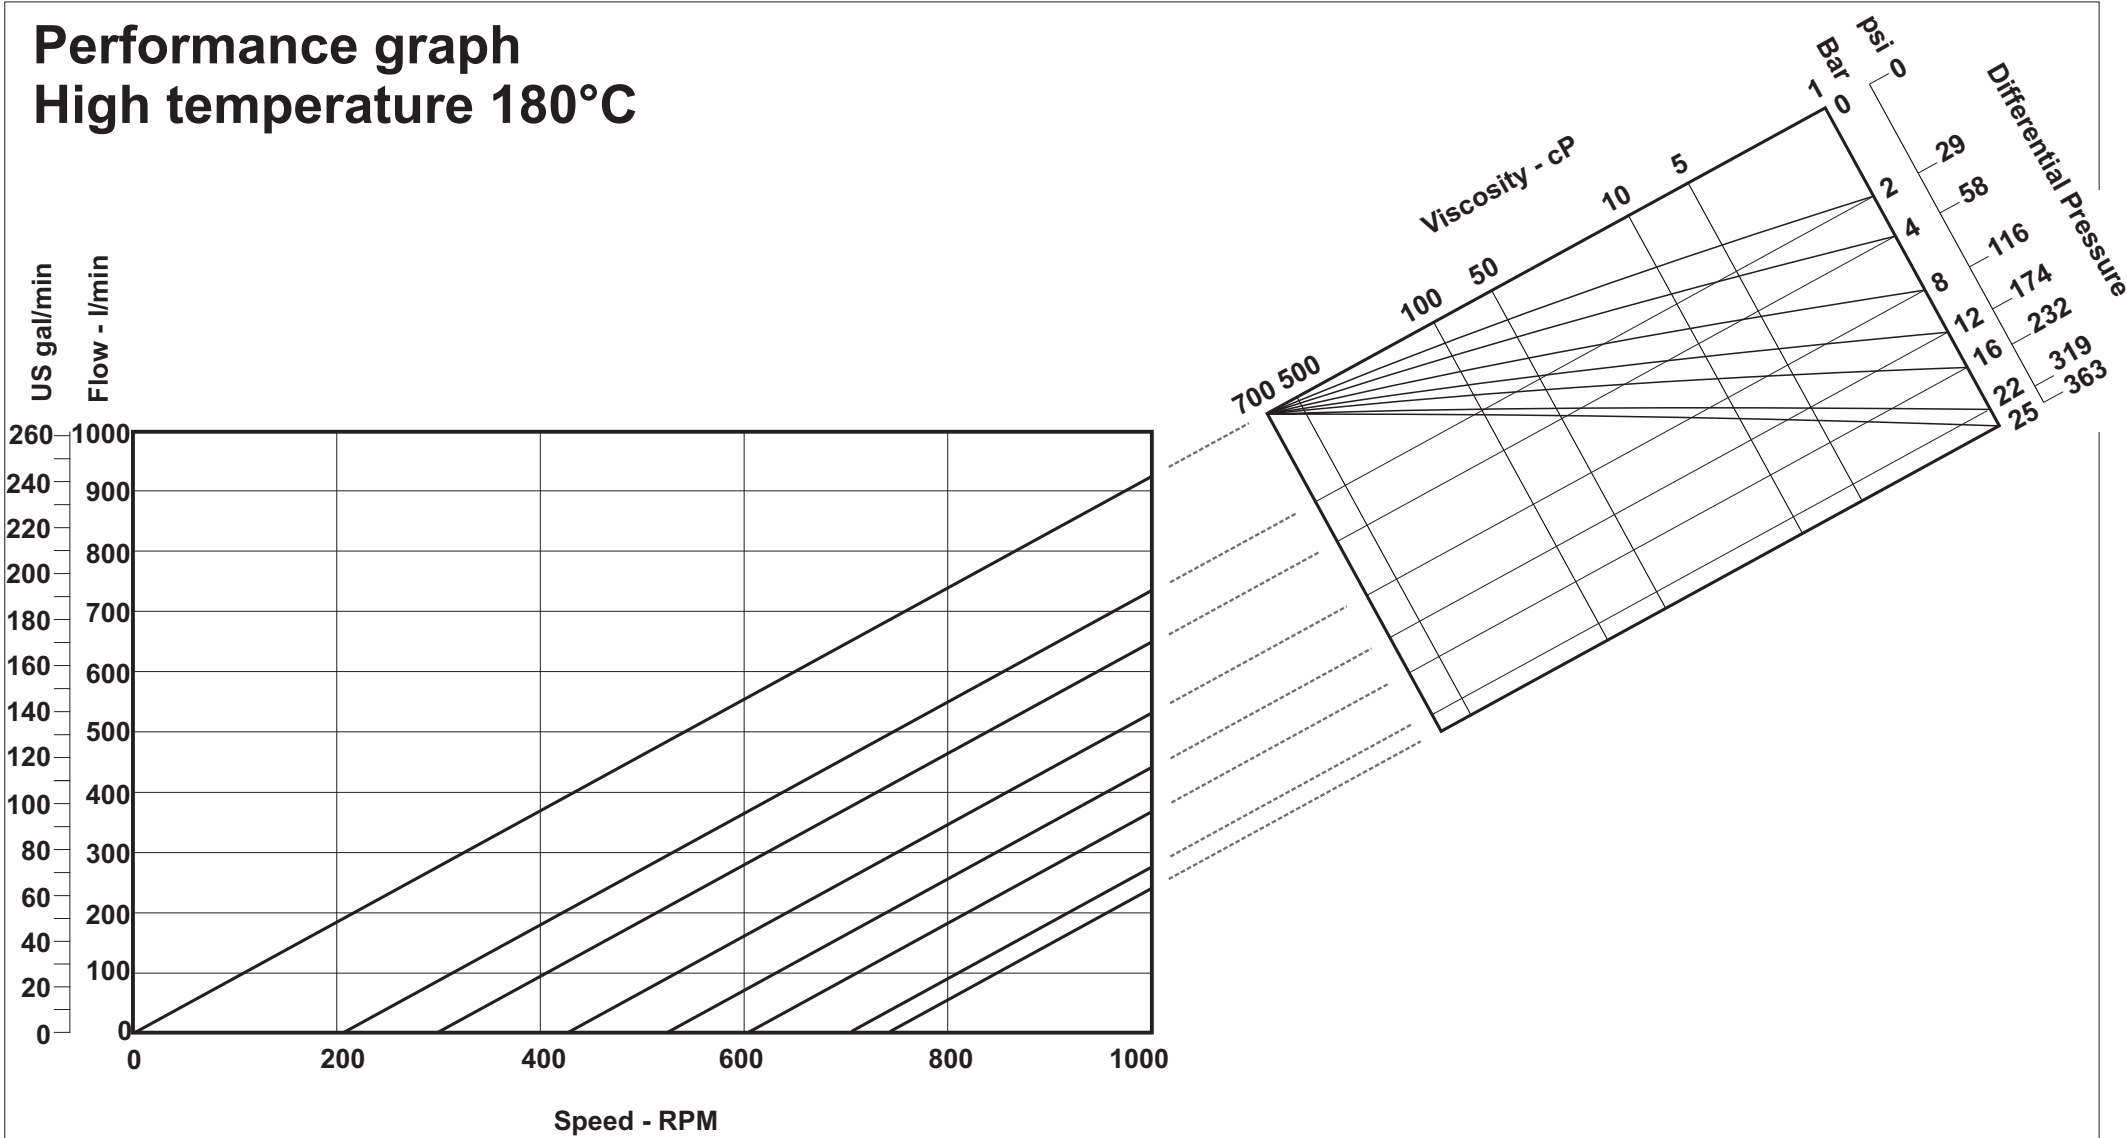

# Power and N.P.S.H.R graph

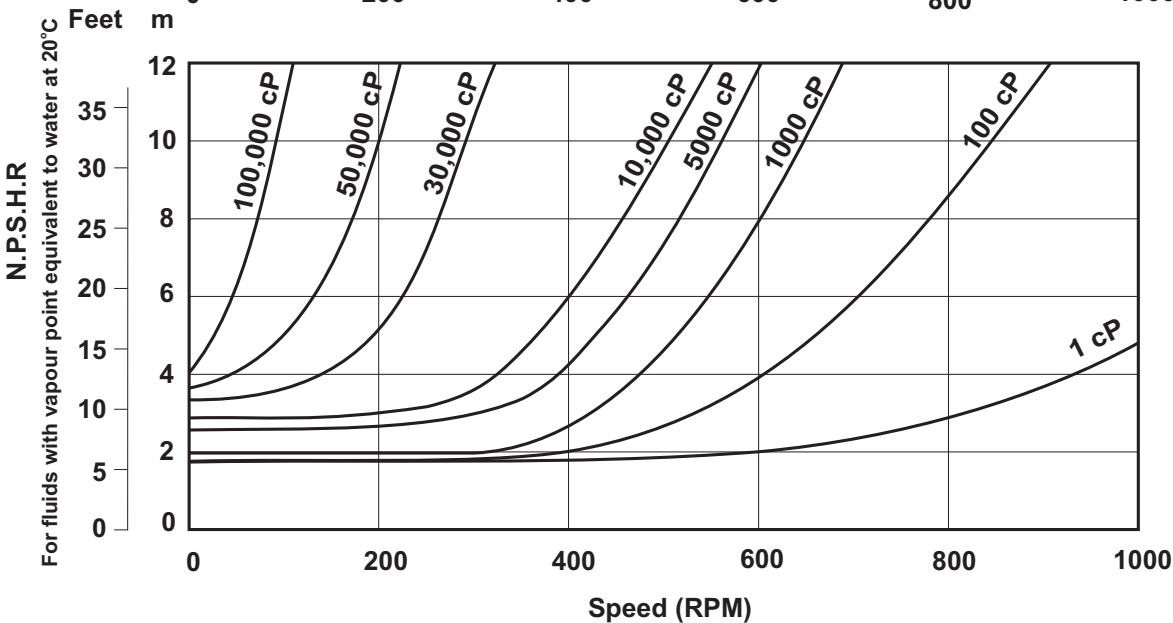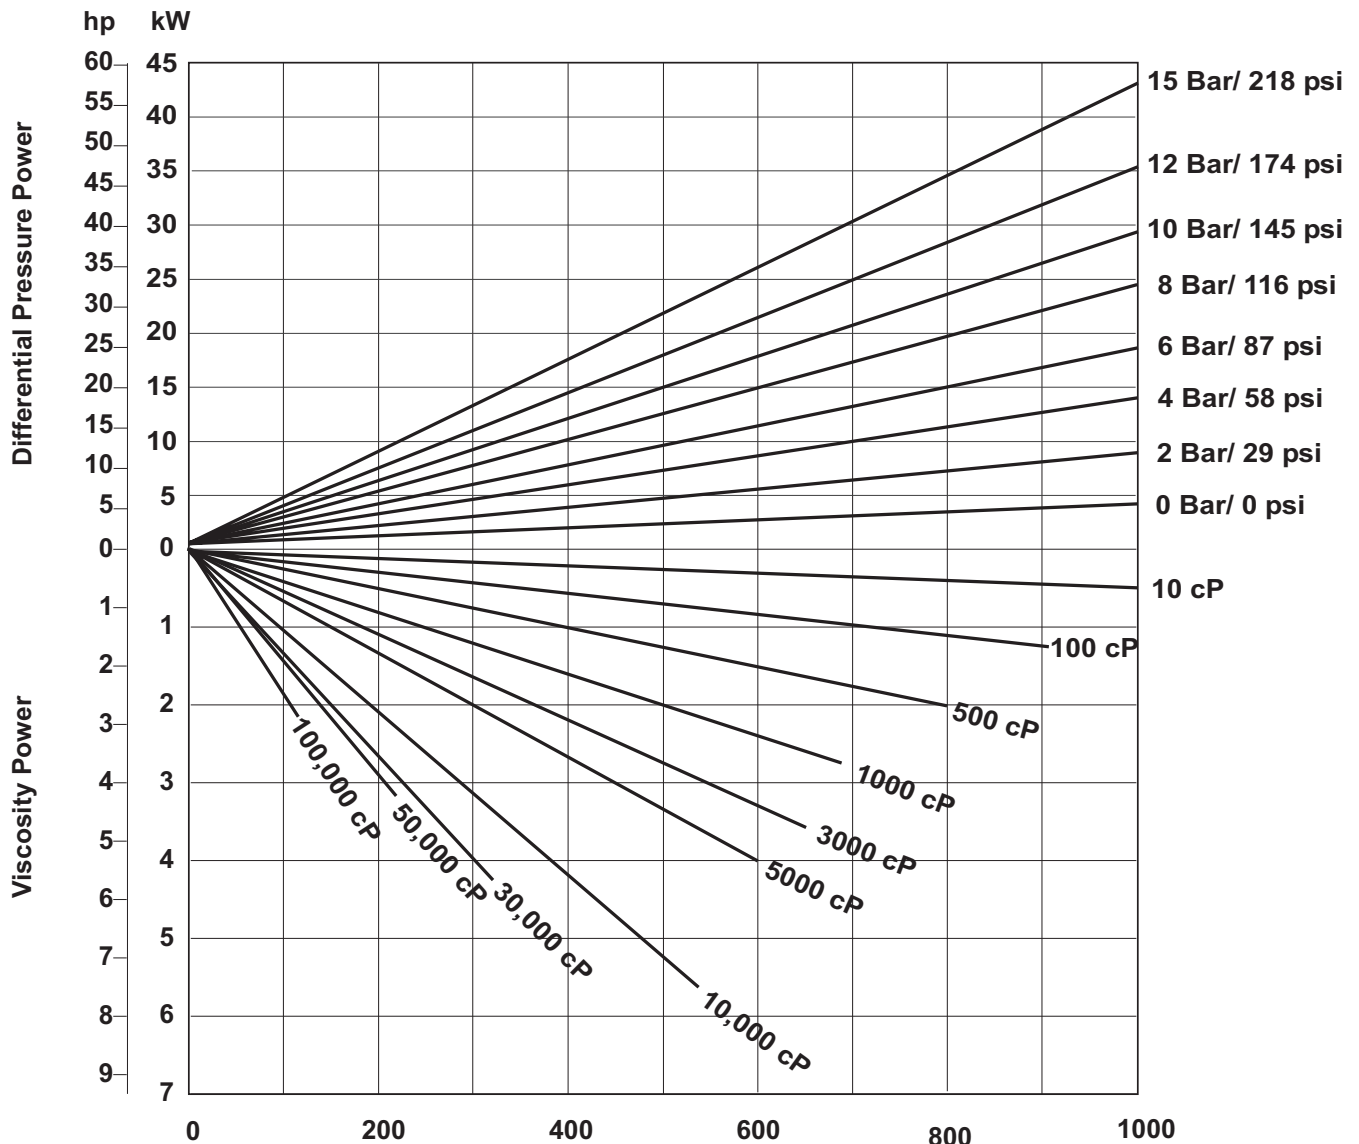


NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.


Max. shaft input torque - 700 Nm/ 6200 inlb




# Performance graph High Efficiency

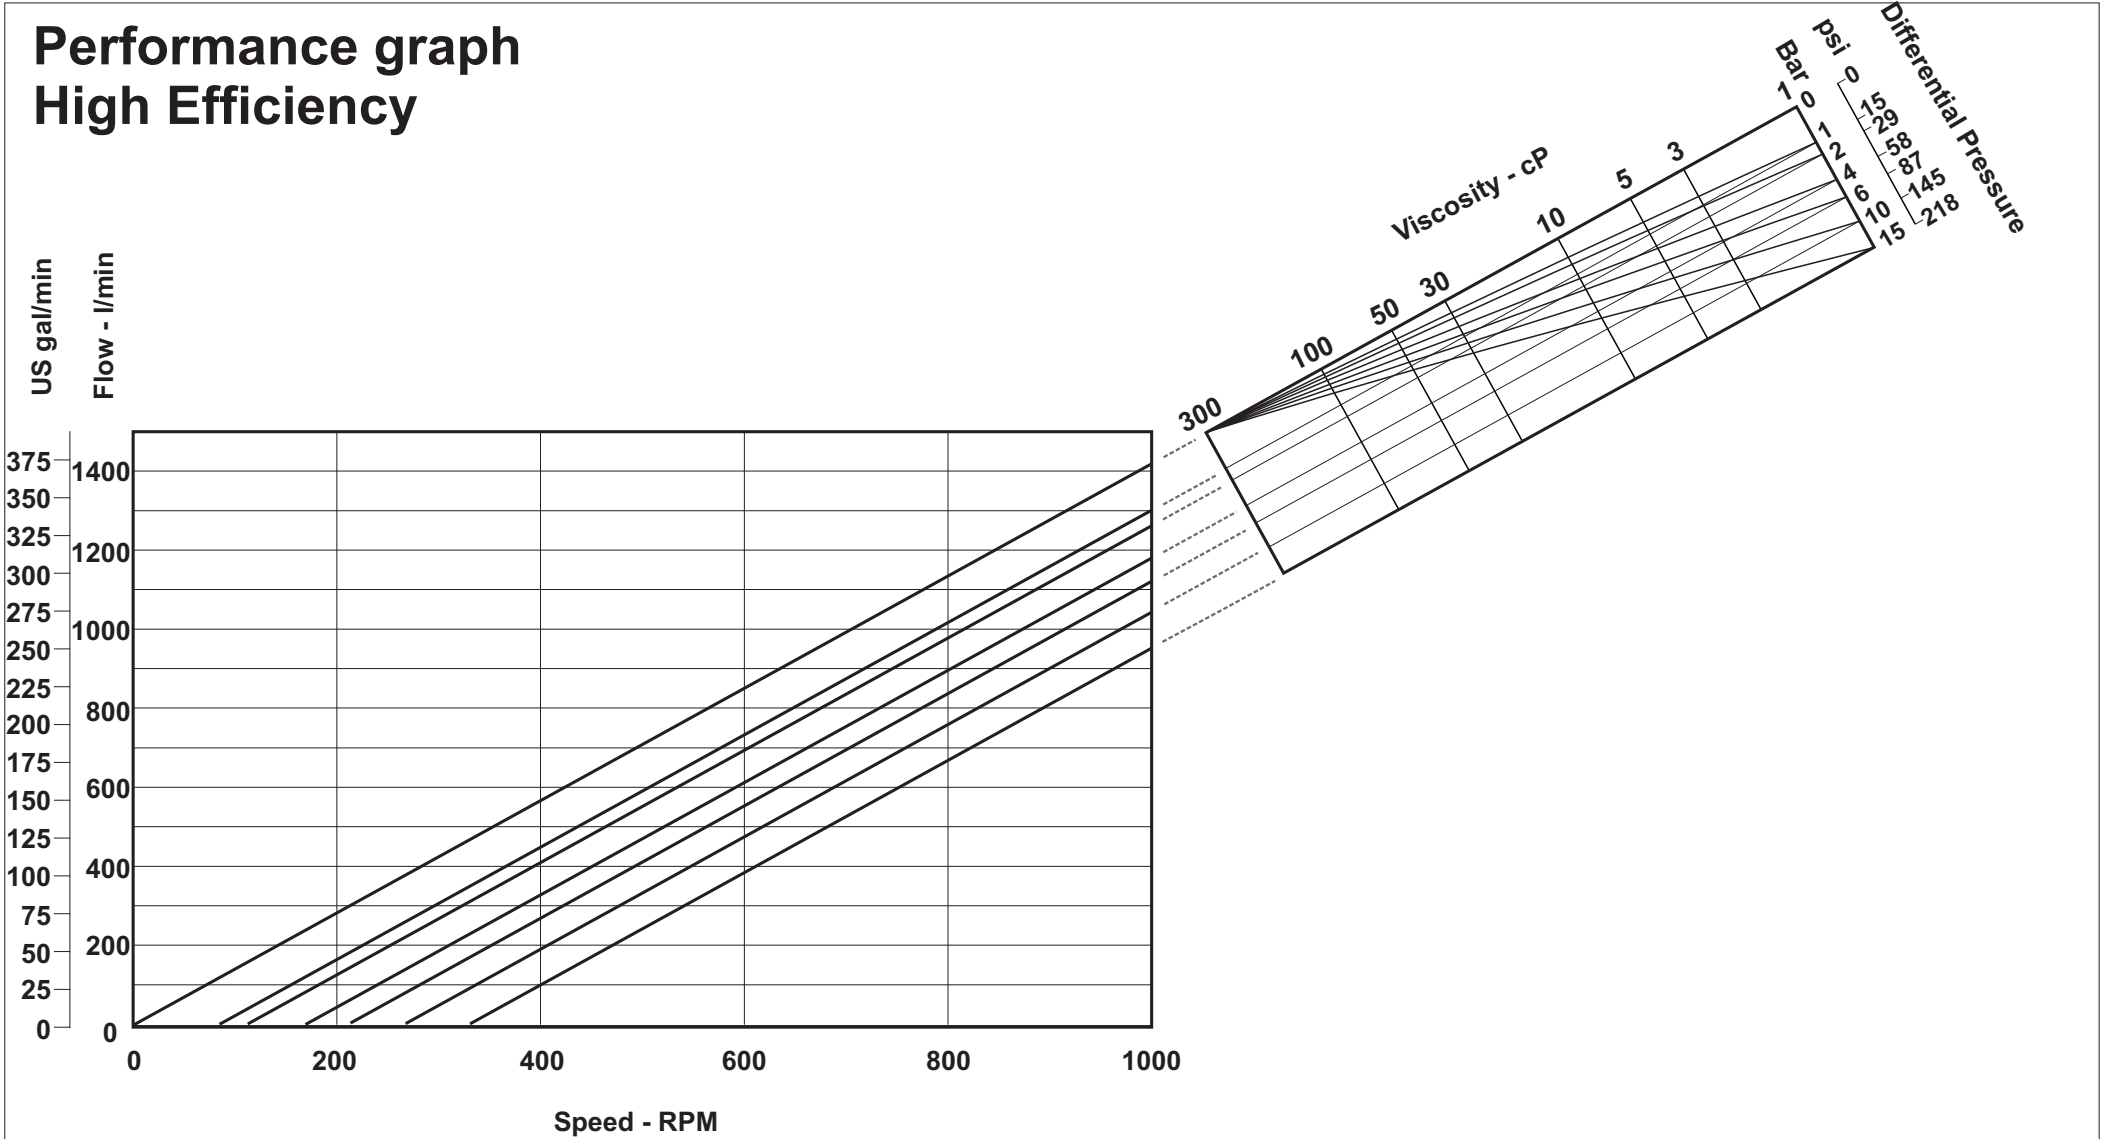



# Performance graph Multi-Duty

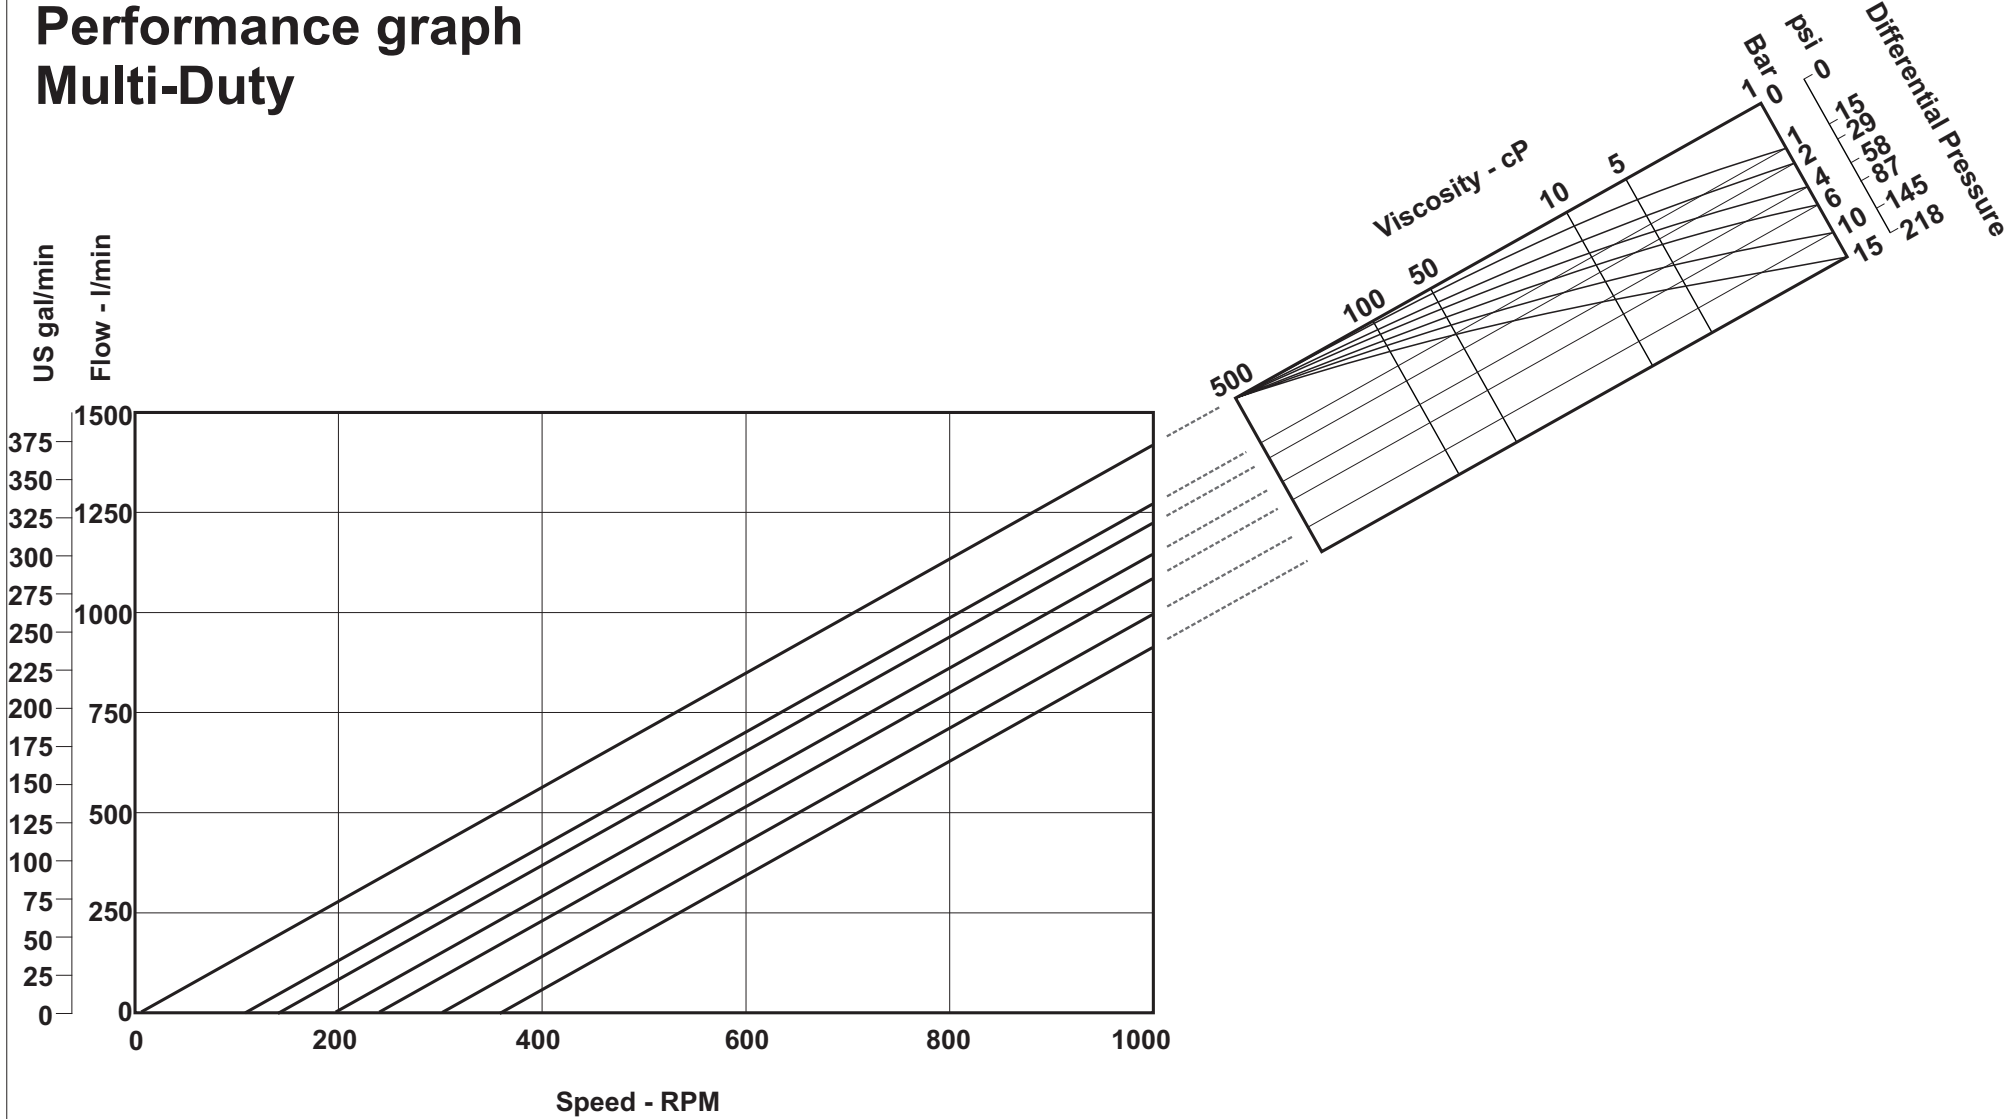

# Performance graph High temperature 180°C

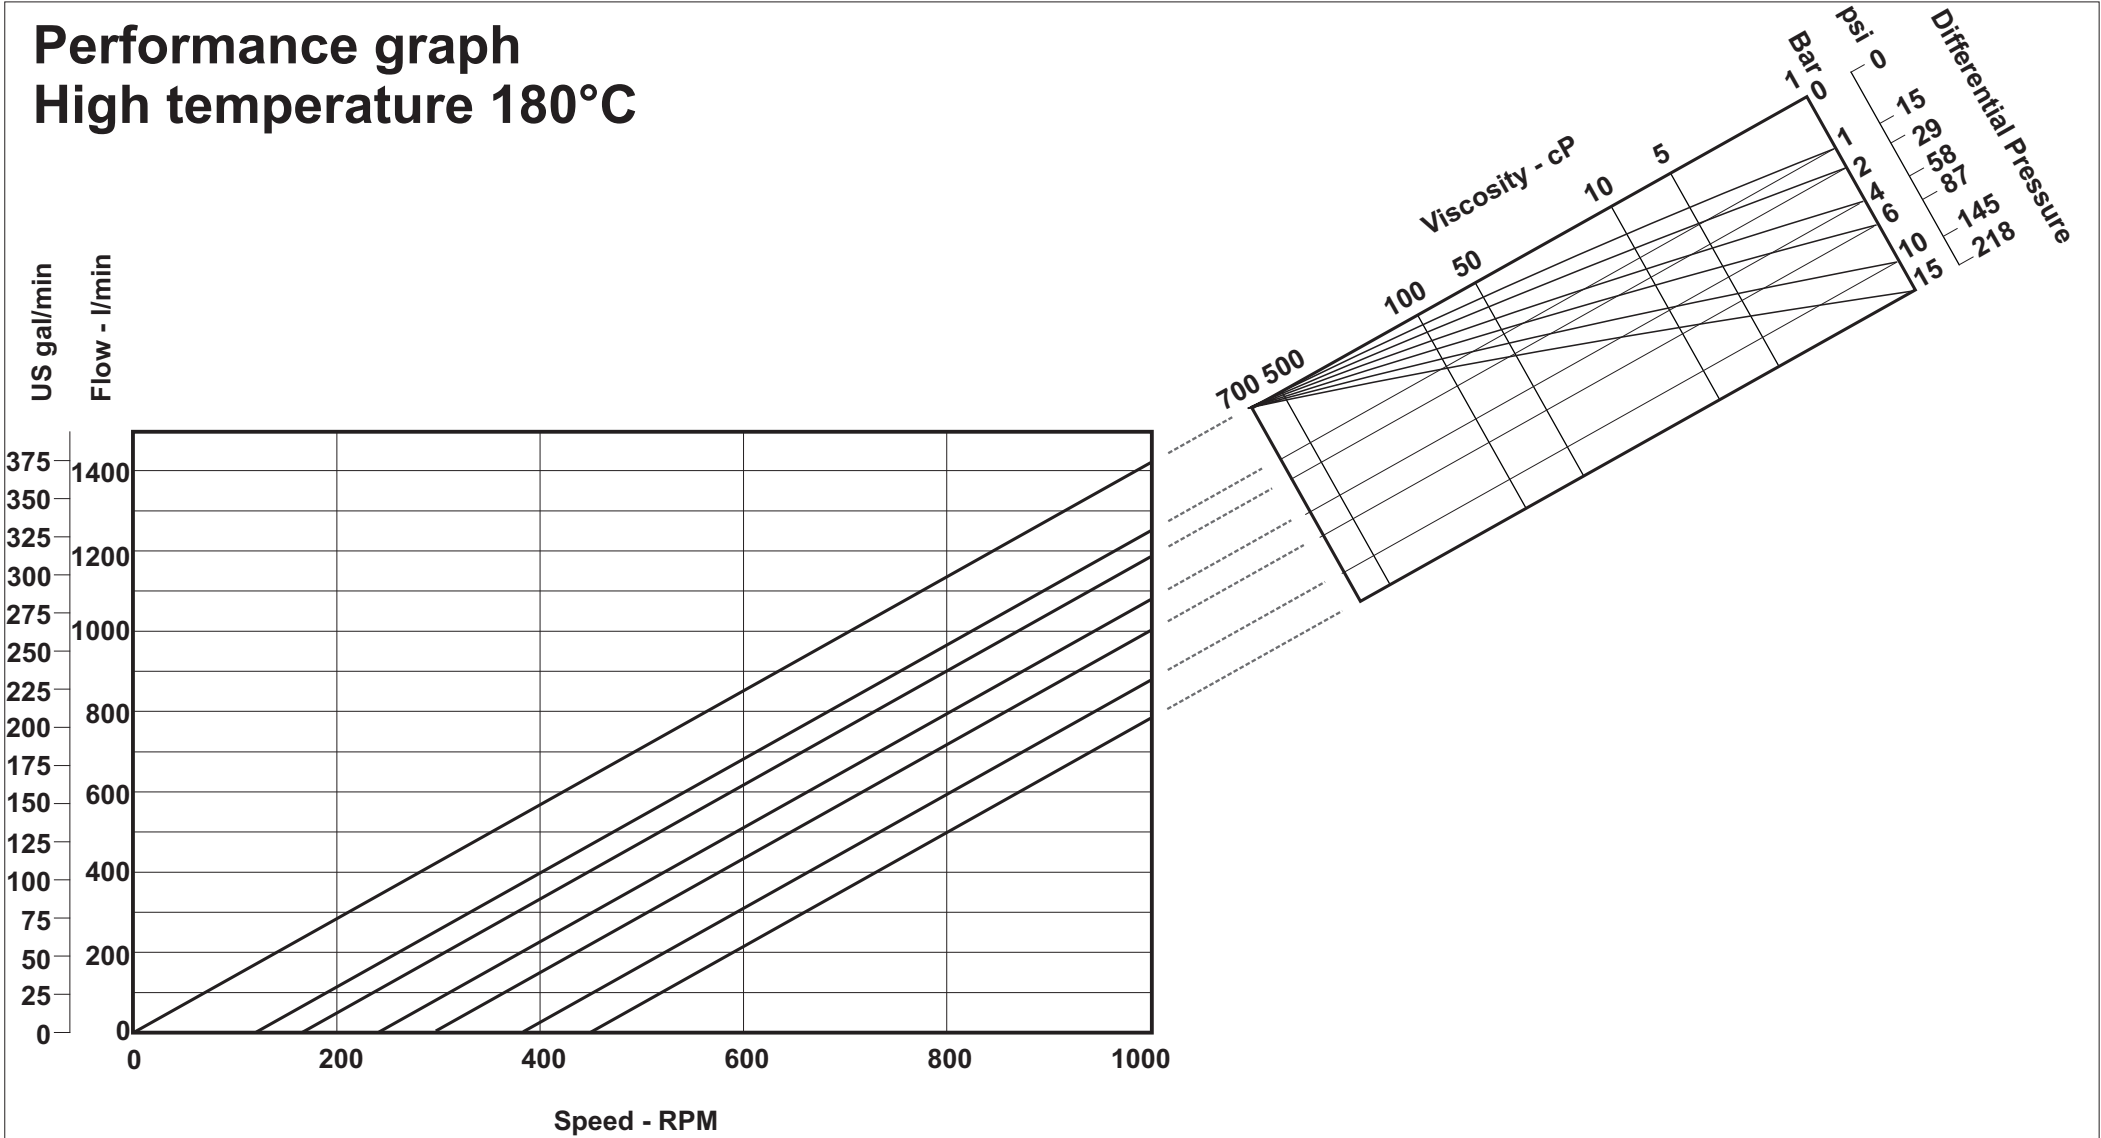


# Power and N.P.S.H.R graph

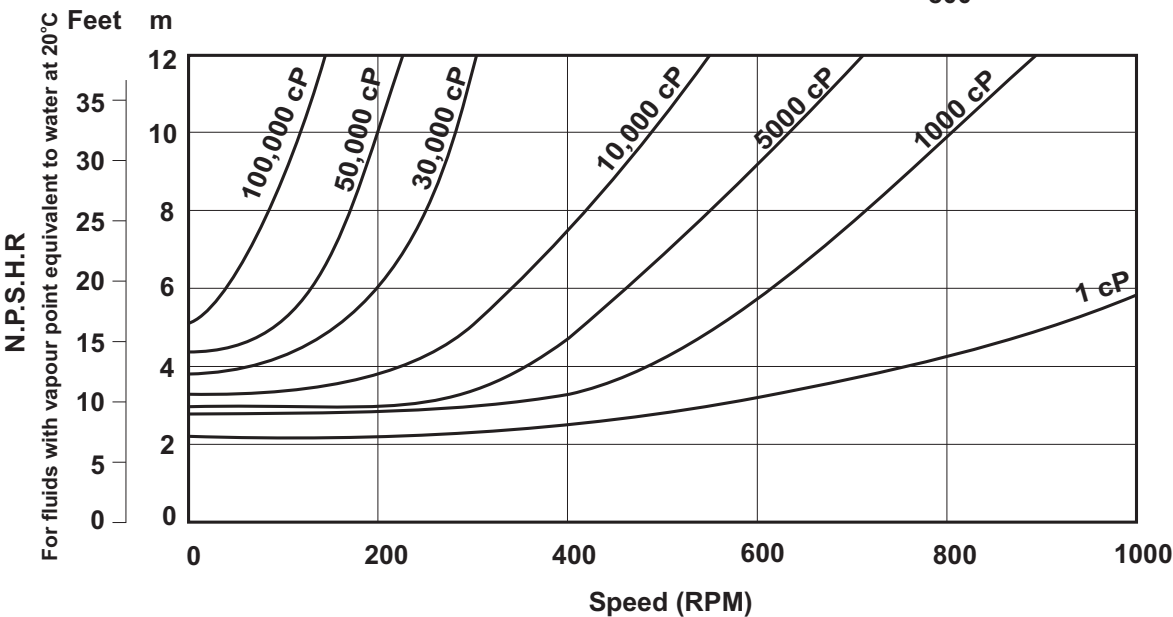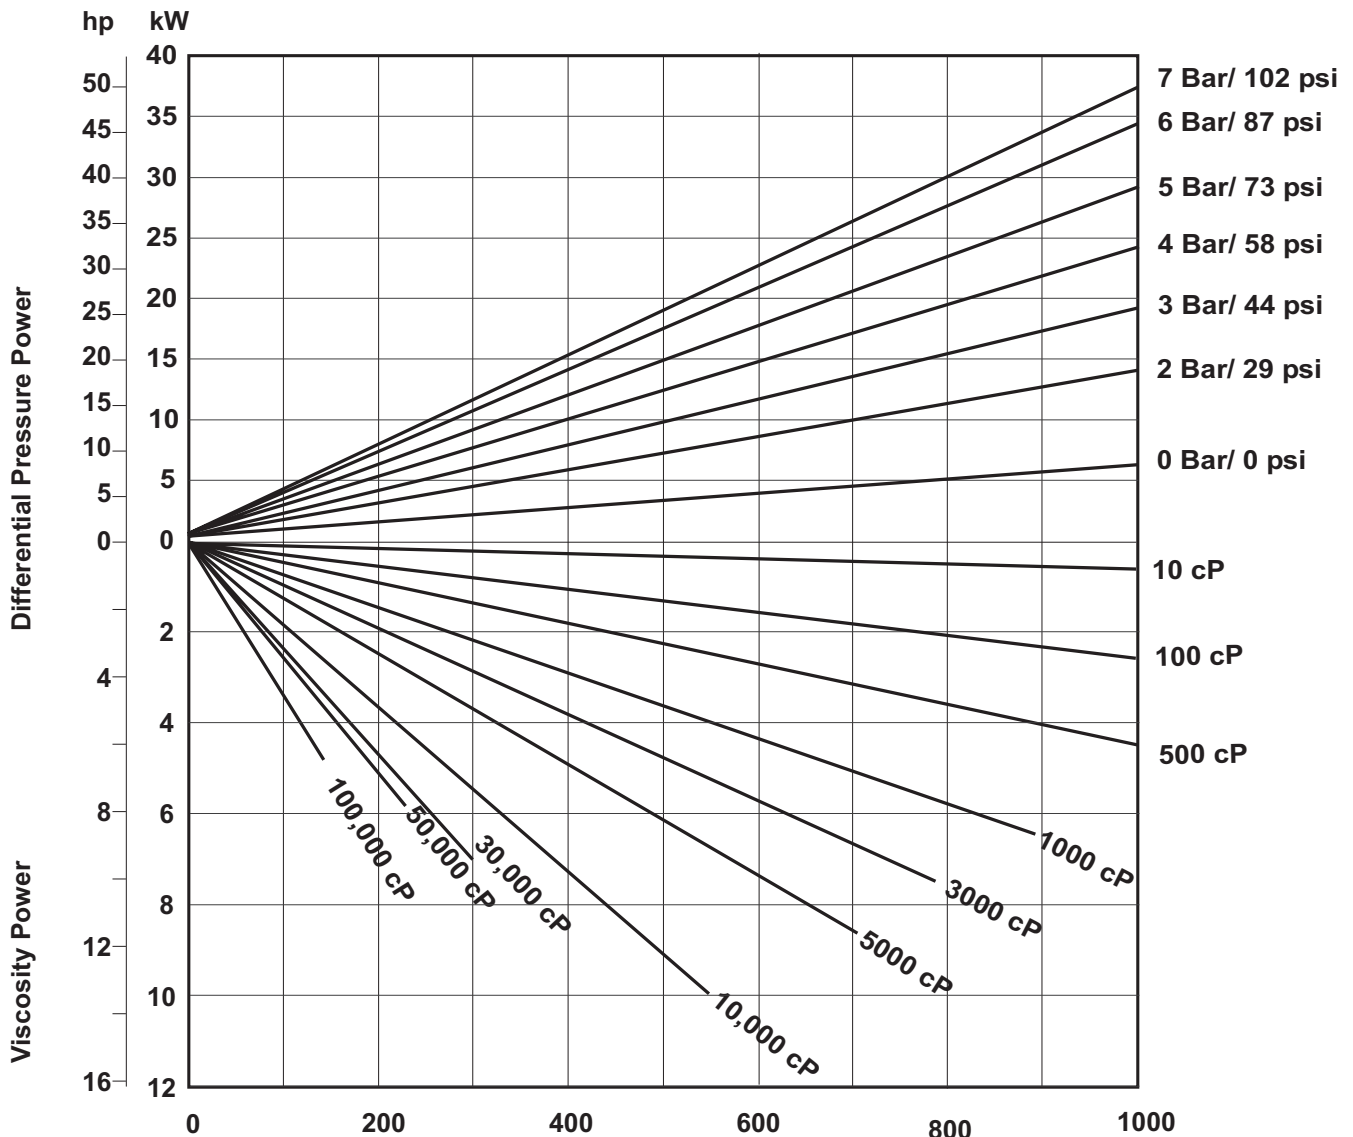


NPSH available should exceed the NPSHR of the pump by 0.5 m minimum to avoid cavitation.

Max. shaft input torque - 700 Nm/ 6200 inlb

# Performance graph High Efficiency

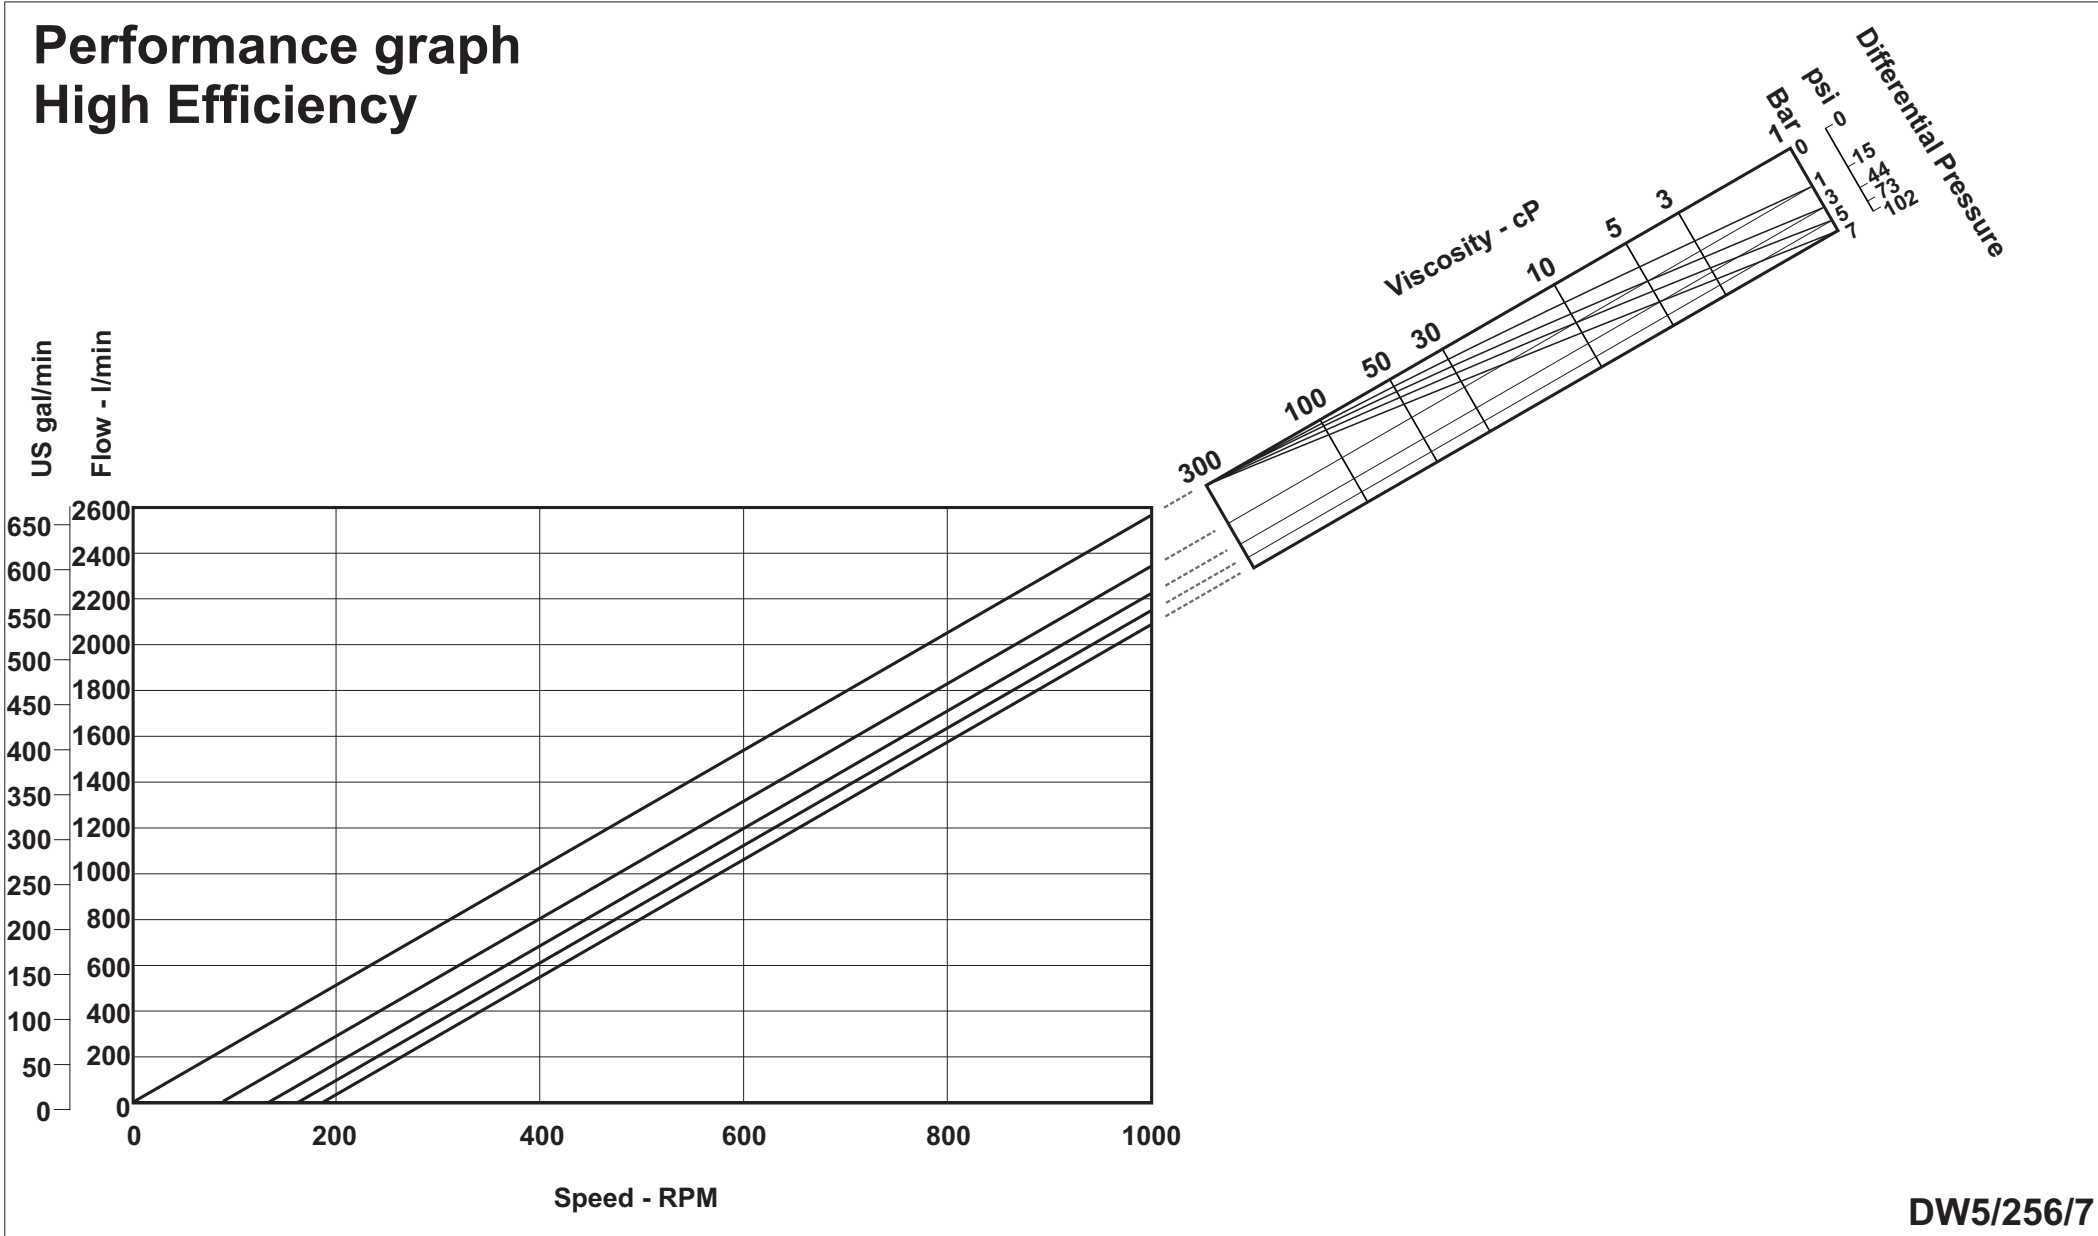

# Performance graph Multi-Duty

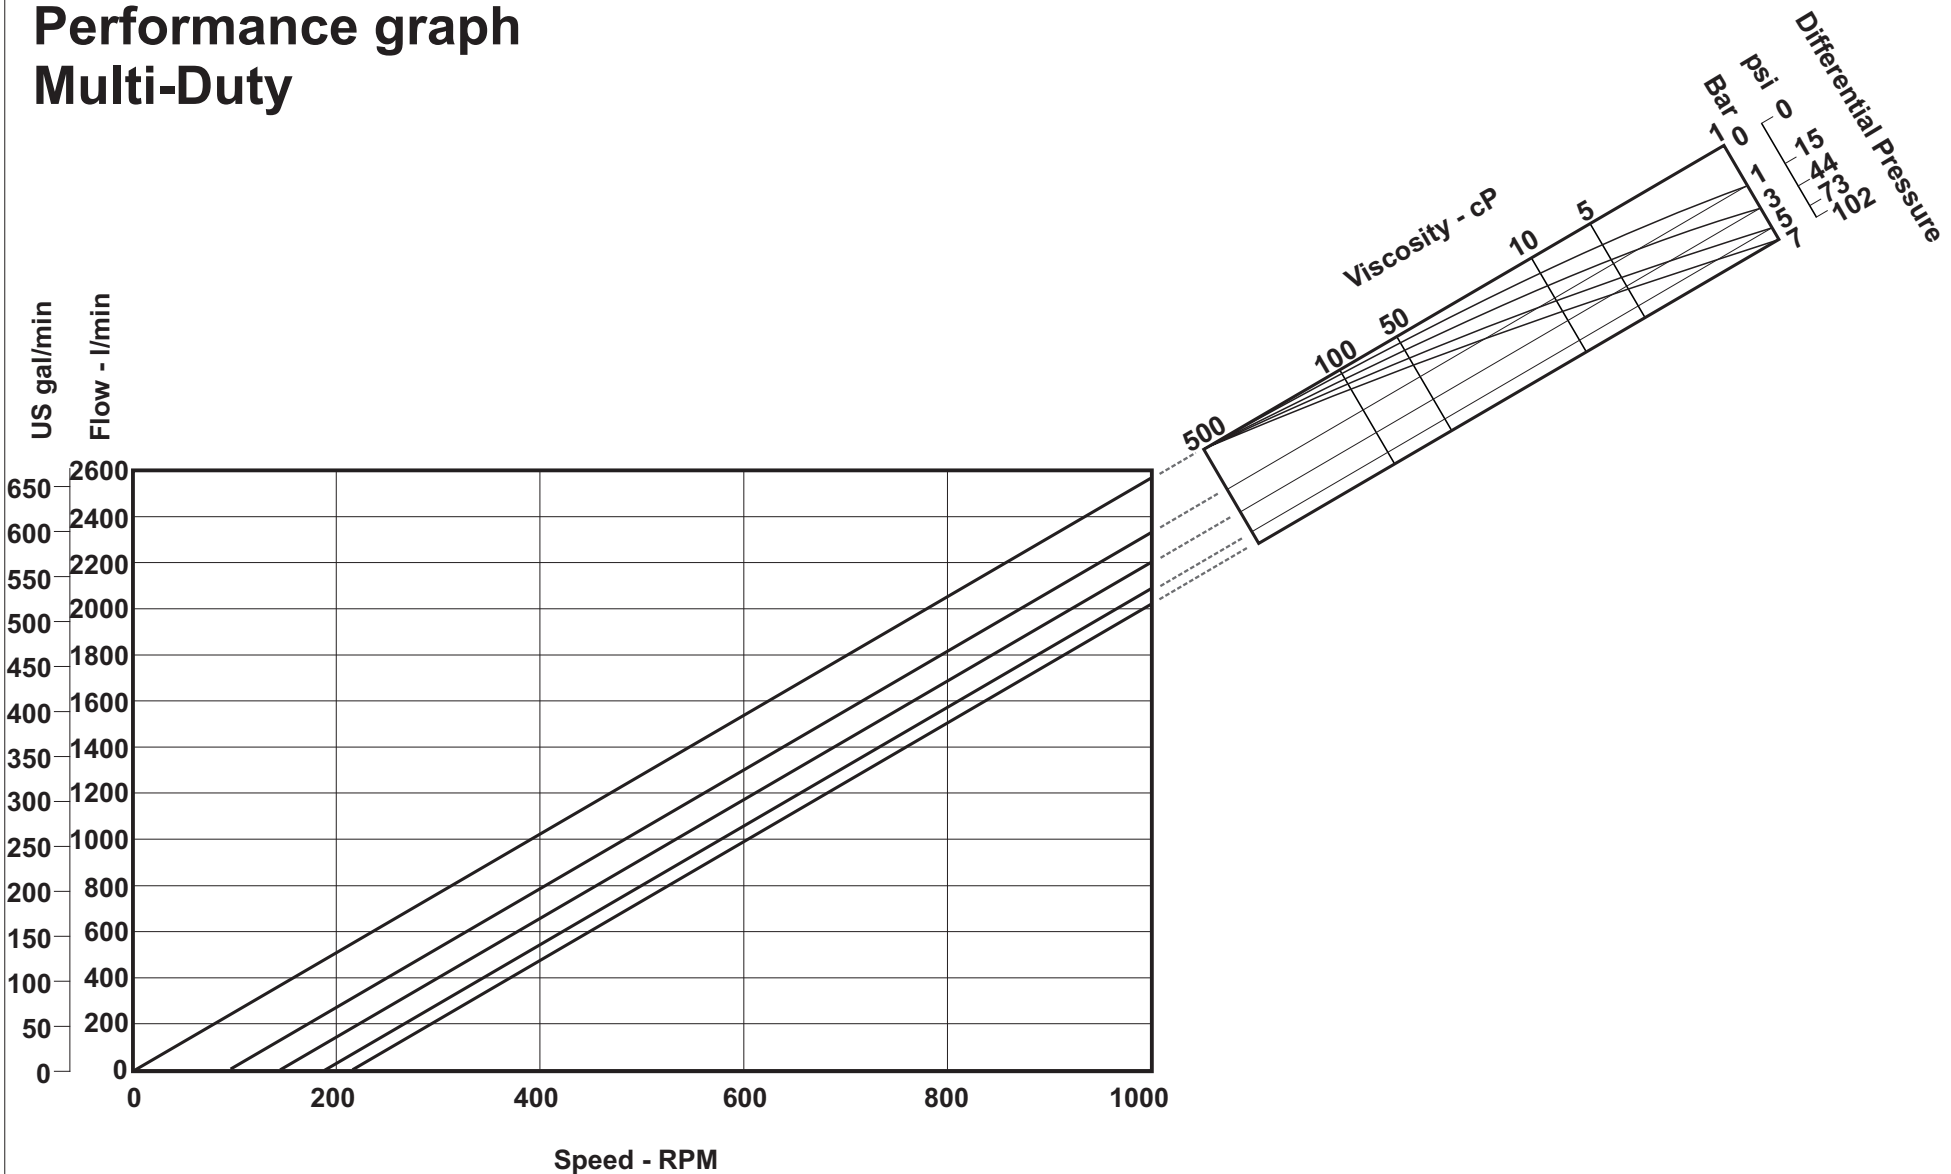

# Performance graph High temperature 180°C

